




.059" (1.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.059" (1.50mm) Connectors

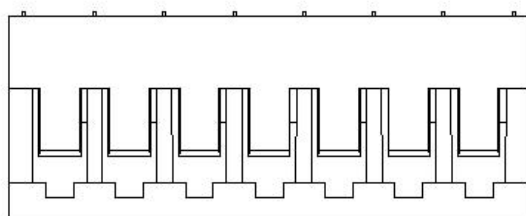

.059"(1.50mm) Pitch Housing / Terminal

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:White
Rating:
Current Rating:1.5 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C
Contact Resistance:20mΩ Max
Insulation Resistance 500MΩ Min
Withstanding Voltage:500V AC/minute

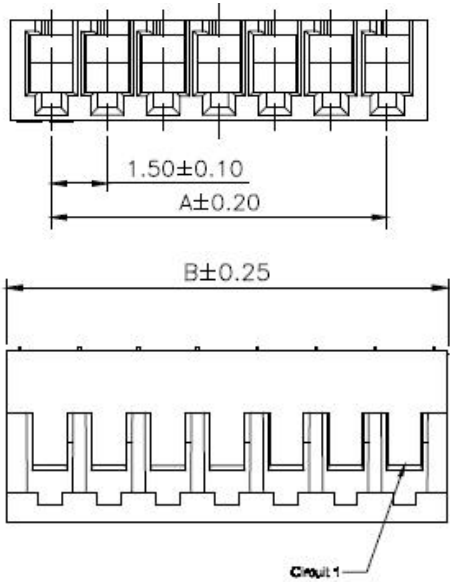

Ordering Information
H1506-XXP-A
1 2 3

1:— Series No.
2:— No. of Positions
3:— A:In bag

Poles	Dimensions (mm)	
	A	B
02P	1.50	3.70
03P	3.00	5.20
04P	4.50	6.70
05P	6.00	8.20
06P	7.50	9.70
07P	9.00	11.20
08P	10.50	12.70
09P	12.00	14.20
10P	13.50	15.70
11P	15.00	17.20
12P	16.50	18.70
13P	18.00	20.20
14P	19.50	21.70
15P	21.00	23.20

Specifications:
Material:phosphor bronze
Wire Range:AWG#24~28
Insulation O.D.:1.2(max)



Ordering Information
H1506T-PX
1 2 3

1:— Series No.
2:— T:Terminal
3:— Plated:
A:Gold Flash
Q: Plated Tin

