

# **.079''(2.00mm) Pitch/Disconnectable Insulation Displacement Connectors**

## **.079''(2.00mm) Connectors**

---



**Specifications:**

Material And Finish:

Insulator:PBT, UL94V-0,Color:Black

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°~+105°C

**Electrical:**

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute





**Ordering Information**



**H20003-XXP-XA**

1 2 3 4

- 1:— Series No.
- 2:— No. of Positions
- 3:— Type:  
A:A Type  
B:A Type  
C:A Type
- 4:— A:In Bag

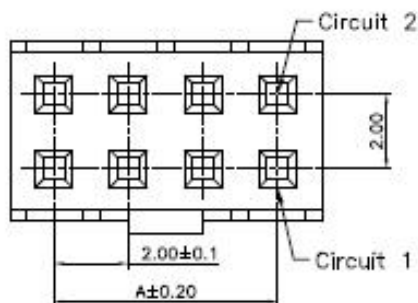

| Poles | Dimensions (mm) |       |
|-------|-----------------|-------|
|       | A               | B     |
| 04P   | 2.00            | 4.35  |
| 06P   | 4.00            | 6.35  |
| 08P   | 6.00            | 8.35  |
| 10P   | 8.00            | 10.35 |
| 12P   | 10.00           | 12.35 |

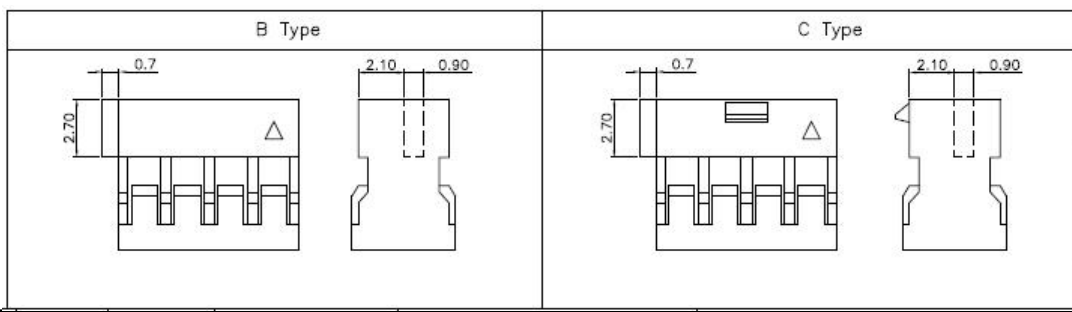

**Material:**

Terminal:Phosphor Bronze

Wire Range:AWG#22~30

Insulation O.D.:1.4mm/Max



**Ordering Information**

**H20003T-PX**

1 2 3

- 1:— Series No.
- 2:— T:Terminal
- 3:— Plated:  
A:Gold flash  
Q:Tin Plated

