

.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp

Voltage Rating:100V AC/DC


Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

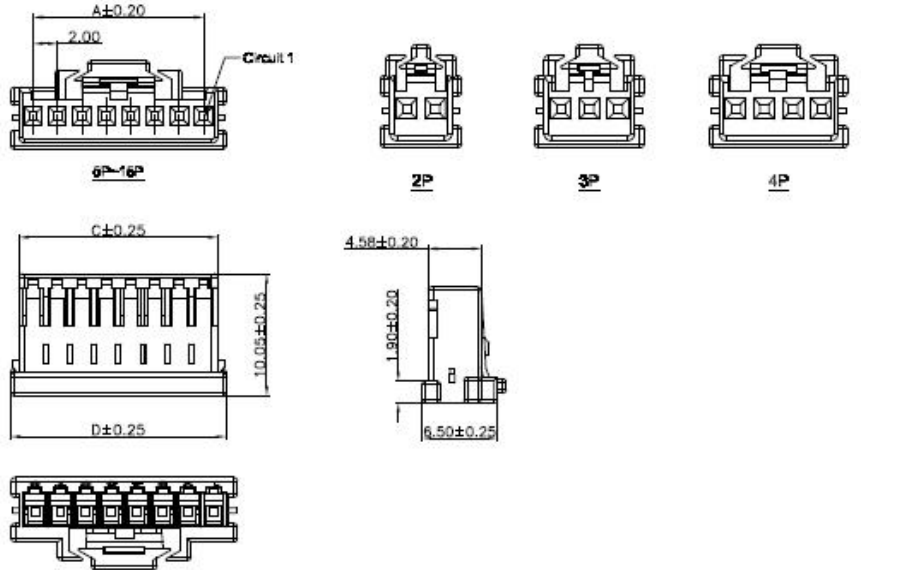

Ordering Information

H2000F-XXP-XA

1 2 3 4 5

- 1:— Series No.
2:— F:Female
3:— No. of Positions
4:— Color:
N:Natural
B:Black
R:Red
BL:Blue
GN:Green
LG:Light Green
GY:Gray
YL:Yellow
5:— A:In bag

Poles	Dimensions(mm)		
	A	B	C
02P	2.00	5.71	4.35
03P	4.00	7.71	6.35
04P	6.00	9.71	8.35
05P	8.00	11.71	10.35
06P	10.00	13.71	12.35
07P	12.00	15.71	14.35
08P	14.00	17.71	16.35
09P	16.00	19.71	18.35
10P	18.00	21.71	20.35
11P	20.00	23.71	22.35
12P	22.00	25.71	24.35
13P	24.00	27.71	26.35
14P	26.00	29.71	28.35
15P	28.00	31.71	30.35

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp

Voltage Rating:100V AC/DC


Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

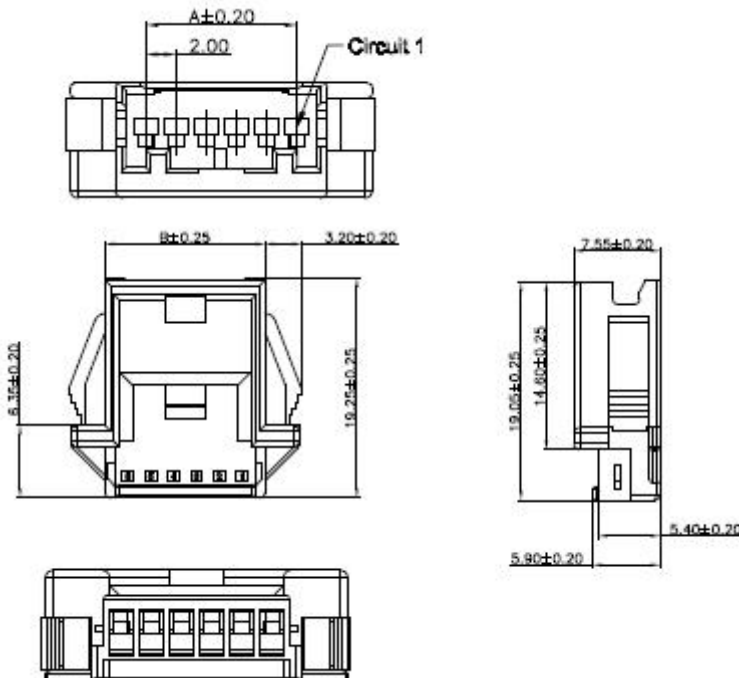

Ordering Information

H2000M-XXP-XA

1 2 3 4 5

- 1:— Series No.
2:— M:Male
3:— No. of Positions
4:— Color:
N:Natural
B:Black
R:Red
BL:Blue
GN:Green
LG:Light Green
GY:Gray
YL:Yellow
5:— A:In bag

Poles	Dimensions(mm)		
	A	B	C
02P	2.00	6.00	1.50
03P	4.00	8.00	2.06
04P	6.00	10.00	3.60
05P	8.00	12.00	3.60
06P	10.00	14.00	3.60
07P	12.00	16.00	3.60
08P	14.00	18.00	3.60
09P	16.00	20.00	3.60
10P	18.00	22.00	3.60
11P	20.00	24.00	3.60
12P	22.00	26.00	3.60
13P	24.00	28.00	3.60
14P	26.00	30.00	3.60
15P	28.00	32.00	3.60

.079" (2.00mm) Pitch Terminal

HJBRIGHT®

Specifications:

Material: Copper alloy

Wire Range: AWG#22~26

Insulation O.D.: 1.50(max)



Ordering Information

H2000TM-PX
1 2 3 4




1:— Series No.

2:— T: Terminal


3:— M: Male

4:— A: Gold Flash


Q: Plated Tin

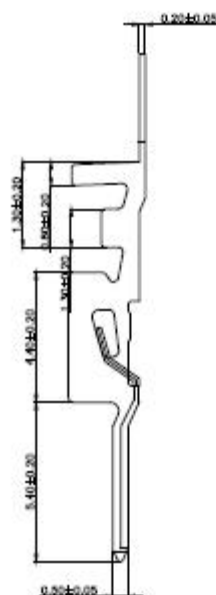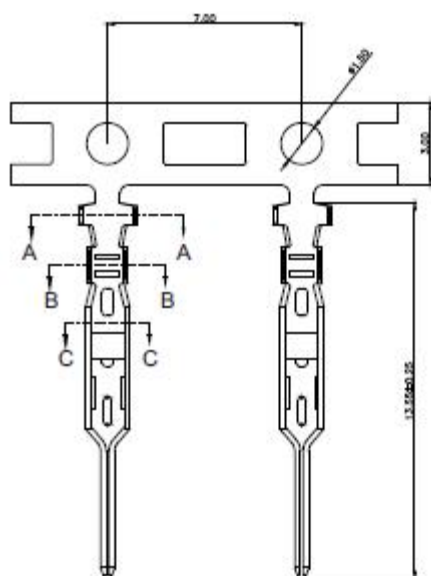

SEC-A-A



SEC-B-B



SEC-C-C

Specifications:

Material: Copper alloy

Wire Range: AWG#22~26

Insulation O.D.: 1.50(max)



Ordering Information

H2000TF-PX
1 2 3 4




1:— Series No.

2:— T: Terminal


3:— F: Female

4:— A: Gold Flash


Q: Plated Tin

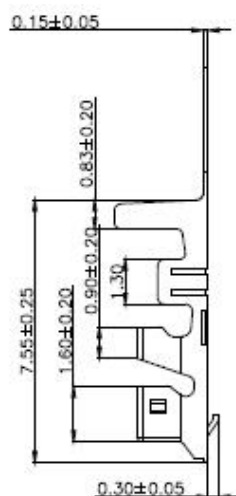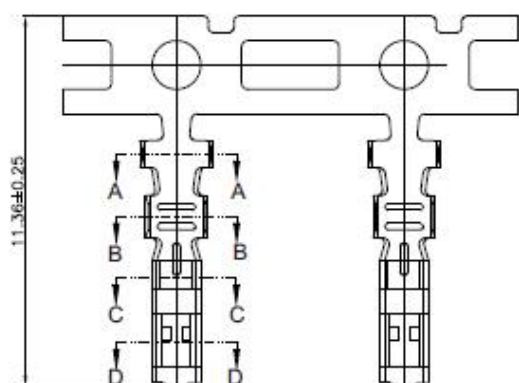


SEC-A-A



SEC-B-B



SEC-C-C



SEC-D-D

东莞市华晶电子有限公司
<http://www.hjbright.com>