


.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch 90° / 180° Wafer

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0Amp(22AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

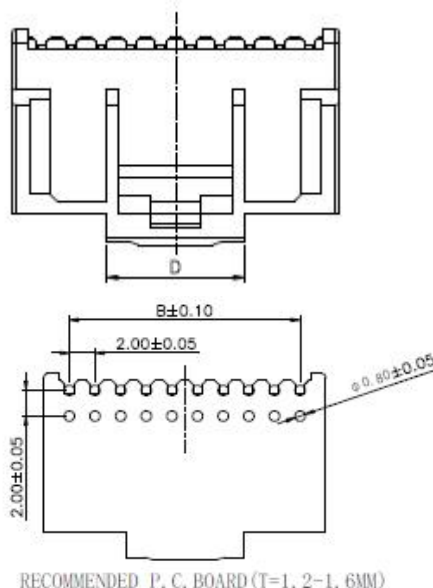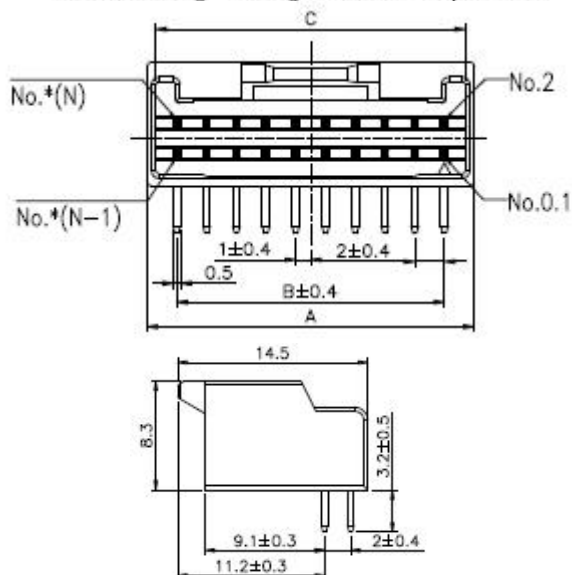

RECOMMENDED P. C. BOARD (T=1, 2-1, 6MM)

HJBRIGHT®

Ordering Information

A20022R-XXS-01-X

1 2 3 4 5

1: — Series No.

2: — R/R/A Type

3: — No. of Positions

4: — S:Matte Tin Plated

5: — A:In bag

B:In Tube

C:In Tray

D	C	B	A	CKT.
9.2	40.7	38	42	40
9.2	38.7	36	40	38
9.2	36.7	34	38	36
9.2	34.7	32	36	34
9.2	32.7	30	34	32
9.2	30.7	28	32	30
9.2	28.7	26	30	28
9.2	26.7	24	28	26
9.2	24.7	22	26	24
9.2	22.7	20	24	22
9.2	20.7	18	22	20
9.2	18.7	16	20	18
9.2	16.7	14	18	16
9.2	14.7	12	16	14
9.2	12.7	10	14	12
7.3	10.7	8	12	10

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0Amp(22AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

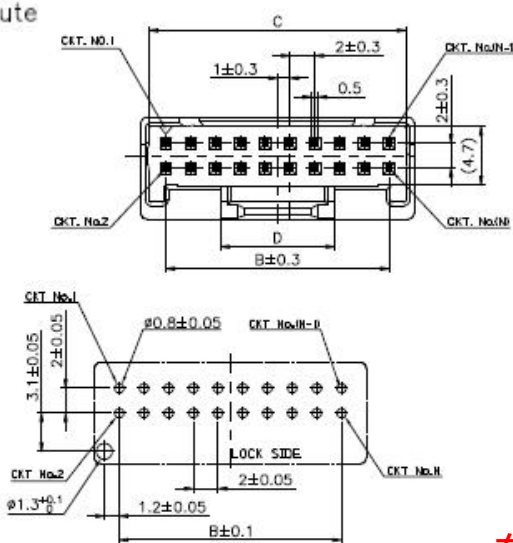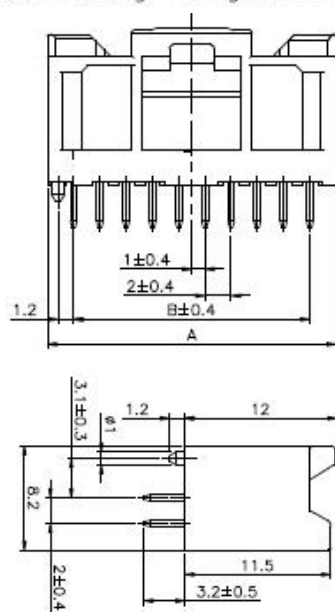

RECOMMENDED P. C. BOARD (T=1, 2-1, 6MM)

Ordering Information

A20022S-XXS-01-X

1 2 3 4 5

1: — Series No.

2: — S: Straight type

3: — No. of Positions

4: — S:Matte Tin Plated

5: — A:In bag

B:In Tube

C:In Tray

D	C	B	A	CKT.
9.2	40.7	38	42	40
9.2	38.7	36	40	38
9.2	36.7	34	38	36
9.2	34.7	32	36	34
9.2	32.7	30	34	32
9.2	30.7	28	32	30
9.2	28.7	26	30	28
9.2	26.7	24	28	26
9.2	24.7	22	26	24
9.2	22.7	20	24	22
9.2	20.7	18	22	20
9.2	18.7	16	20	18
9.2	16.7	14	18	16
9.2	14.7	12	16	14
9.2	12.7	10	14	12
7.3	10.7	8	12	10

东莞市华晶电子有限公司
<http://www.hjbright.com>

.079" (2.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp (22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute




Ordering Information

H20022-XXP-A
1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

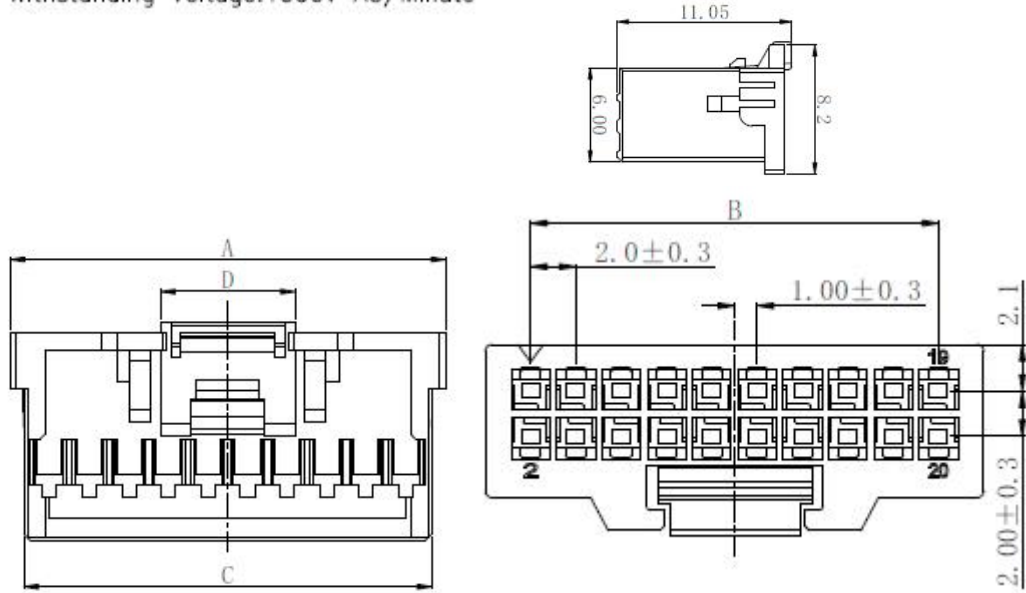

D	C	B	A	CKT.
6.8	40.6	38	42	40
6.8	38.6	36	40	38
6.8	36.6	34	38	36
6.8	34.6	32	36	34
6.8	32.6	30	34	32
6.8	30.6	28	32	30
6.8	28.6	26	30	28
6.8	26.6	24	28	26
6.8	24.6	22	26	24
6.8	22.6	20	24	22
6.8	20.6	18	22	20
6.8	18.6	16	20	18
6.8	16.6	14	18	16
6.8	14.6	12	16	14
6.8	12.6	10	14	12
5.1	10.6	8	12	10

Specifications

Housing Material :Copper Alloy

Plated :Tin Plated

Cable Spec. :AWG#22-26

Wire Range :0.126-0.34mm²

Ins. Range :ø0.95-ø1.5mm



Ordering Information

H20022T-PQ
1 2 3

1: — Series No.

2: — T:terminal

3: — Q:TIN Plated

