

.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:Nylon66

Rating:

Current—Maximum per contact:4.0 Amp (22AWG)

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute


HJBRIGHT®

Ordering Information

H20062-XX-XX-XX

1 2 3 4 5

- 1: — Series No.
- 2: — No. of Positions
- 3: — 01:Without Lock Bridge
02:With Lock Bridge
- 4: — Polarization OPTION:
A: A TYPE Color:Black
B: B TYPE Color:Gray
C: C TYPE Color:Dark Gray
- 5: — A:In bag

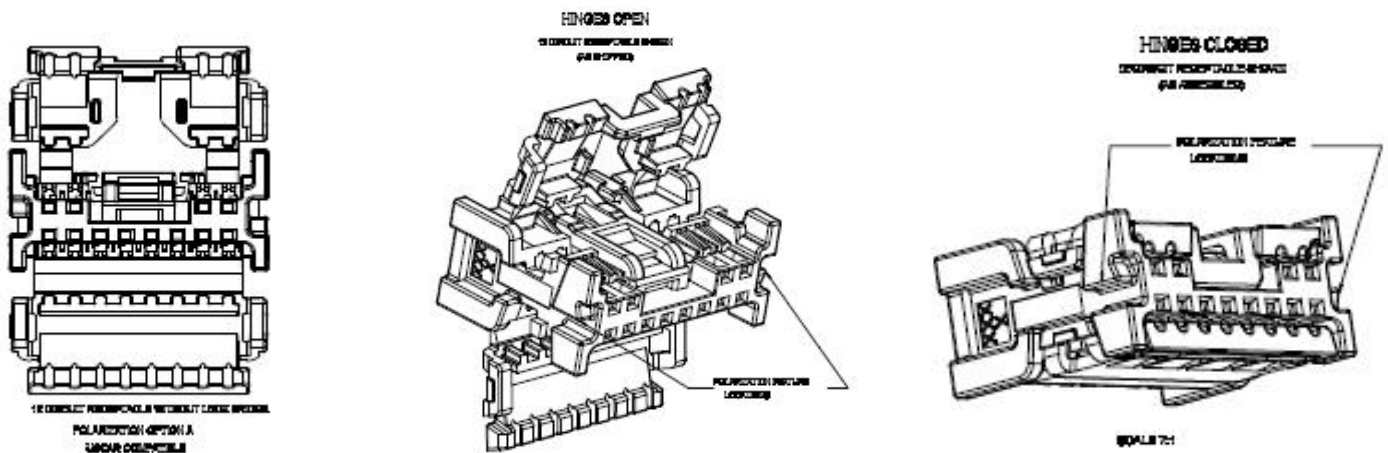

Specifications


Housing Material :Copper Alloy

Plated :SEE Ordering Information

Cable Spec. :SEE TABLE1

Wire Range :SEE TABLE1

Ins. Range :SEE TABLE1

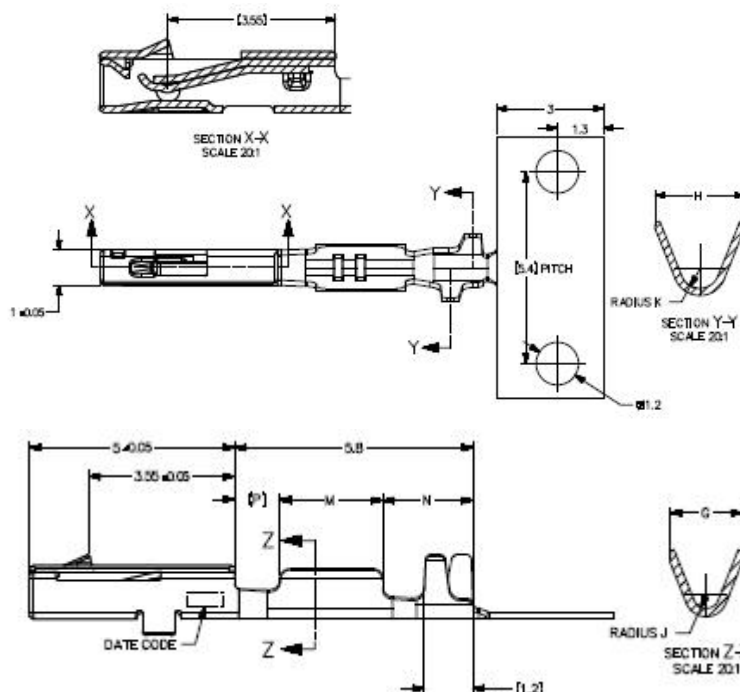


Ordering Information

H20062T-PX-XX

1 2 3 4 5

- 1: — Series No.
- 2: — T:terminal
- 3: — Q:TIN Plated
A:Au Plated
- 4: — D:D WIND (LEFT PAYOFF)
B:B WIND (RIGHT PAYOFF)
- 5: — GRIP CODE
M:WIRE GAGE:0.22mm²
S:WIRE GAGE:0.13mm²
L:WIRE GAGE:0.35mm²

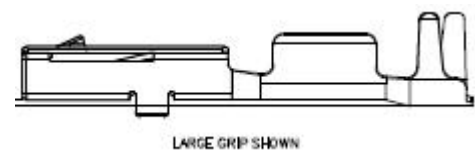

东莞市华晶电子有限公司
<http://www.hjbright.com>