


.079"(2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079"(2.00mm) Connectors



.079" (2.00mm) Pitch 180° / 90° Wafer

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Contact:Phosphor copper

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.




Withstanding Voltage:800V AC/Minute



Ordering Information

A2011S-XXX-01-A

- 1— Series No.
2— S: Straight
3— No. of Positions
4— Q: Tin Plated
5— A: In bag

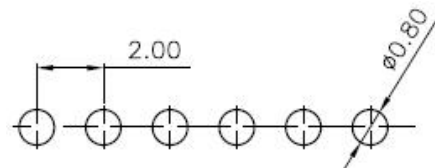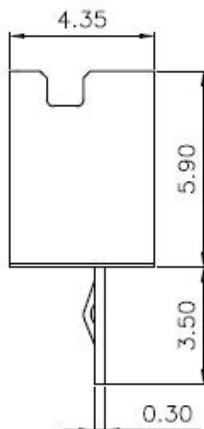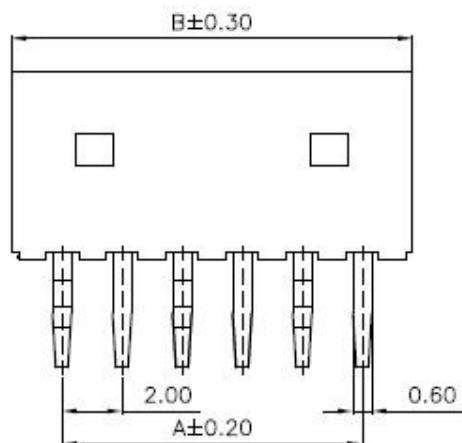

Recommended PCB Layout

Ordering Information & Dimensions

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	09	16.00	20.00
03	4.00	8.00	10	18.00	22.00
04	6.00	10.00	11	20.00	24.00
05	8.00	12.00	12	22.00	26.00
06	10.00	14.00	13	24.00	28.00
07	12.00	16.00	14	26.00	30.00
08	14.00	18.00	15	28.00	32.00

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Nature

Contact:Phosphor copper

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:125V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.



Withstanding Voltage:800V AC/Minute



Ordering Information

A2011R-XXX-01-XA

- 1— Series No.
2— R: R/A Type
3— No. of Positions
4— Q: Tin Plated
S: Matte Tin Plated
5— N: Natural
B: Black
6— A: In bag

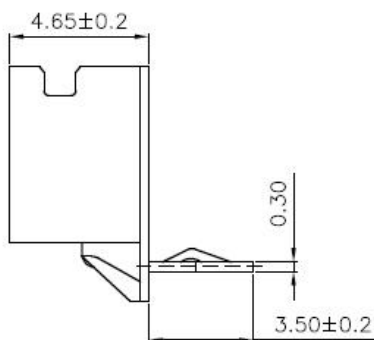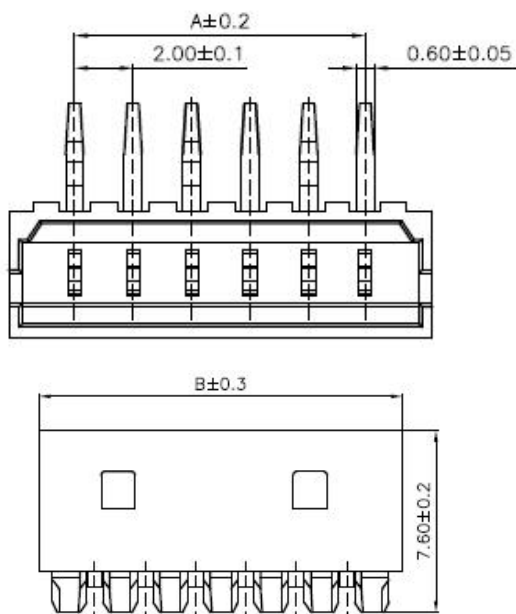

Ordering Information & Dimensions

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	09	16.00	20.00
03	4.00	8.00	10	18.00	22.00
04	6.00	10.00	11	20.00	24.00
05	8.00	12.00	12	22.00	26.00
06	10.00	14.00	13	24.00	28.00
07	12.00	16.00	14	26.00	30.00
08	14.00	18.00	15	28.00	32.00

东莞市华晶电子有限公司
<http://www.hjbright.com>

.079" (2.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0,Color:Natural

Rating:

Current Rating:2.0 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information


H2011-XXP-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A:In Bag

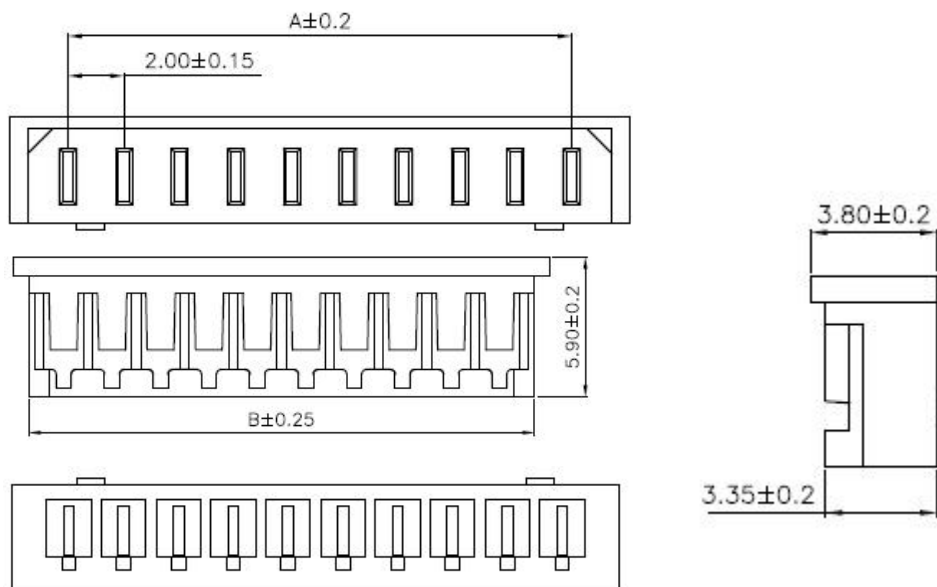


Circuits	Dimension(mm)	
	A	B
02	2.00	5.00
03	4.00	7.00
04	6.00	9.00
05	8.00	11.00
06	10.00	13.00
07	12.00	15.00
08	14.00	17.00
09	16.00	19.00
10	18.00	21.00
11	20.00	23.00
12	22.00	25.00
13	24.00	27.00
14	26.00	29.00
15	28.00	31.00
16	30.00	33.00
17	32.00	35.00
18	34.00	37.00
19	36.00	39.00
20	38.00	41.00

Material:

Terminal:Phosphor Bronze

Wire Range:AWG#24~30

Package/Reel:10000pcs

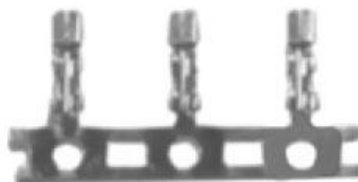

Ordering Information

H2011T-PQ

1 2 3

1:—Series No.

2:—T:Terminal

3:—Plated:

Q: Tin Plated

