

.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch 180° / 90° Wafer

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp(24AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute



HJBRIGHT®

Ordering Information

A2013S-XXX-01-XA

1 2 3 4 5 6

1:— Series No.

2:— S: Straight

3:— No. of Positions

4:— A: Gold Flash




H: Selective Gold Plated

Q: Tin Plated

5:— N: Natural

B: Black

6:— A: In Bag

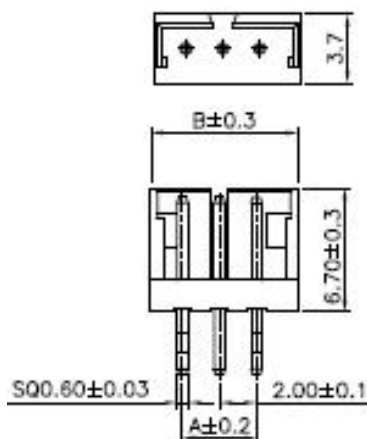

Part No.	Dimensions mm	
	A	E
2	2.00	5.96
3	4.00	7.96
4	6.00	9.96
5	8.00	11.96
6	10.00	13.96
7	12.00	15.96
8	14.00	17.96
9	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Barss

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp(24AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information

A2013R-XXX-01-XA

1 2 3 4 5 6

1:— Series No.

2:— R: R/A Type

3:— No. of Positions

4:— A: Gold Flash




Q: Tin Plated

S: Matte Tin Plated

5:— N: Natural

B: Black

6:— A: In Bag

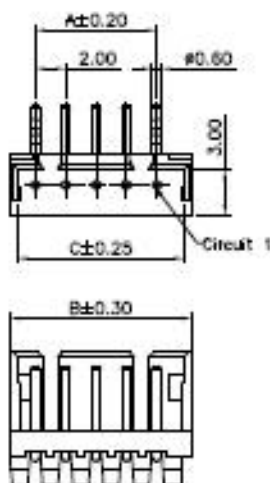

Poles	Dimensions(mm)		
	A	B	C
02P	/	5.96	4.96
03P	4.00	7.96	6.96
04P	6.00	9.40	8.96
05P	8.00	10.83	10.96
06P	10.00	12.27	12.96
07P	12.00	13.70	14.96
08P	14.00	15.14	16.96
09P	16.00	16.58	18.96
10P	18.00	18.01	20.96
11P	20.00	19.45	22.96
12P	22.00	20.88	24.96
13P	24.00	22.32	26.96
14P	26.00	23.76	28.96
15P	28.00	25.19	28.96

东莞市华晶电子有限公司
<http://www.hjbright.com>

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural
Rating:

Current Rating:3.0 Amp (24AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute




Ordering Information

H2013-XXP-A
1 2 3

1:—Series No.

2:—No. of Positions

3:—Q: Tin Plated

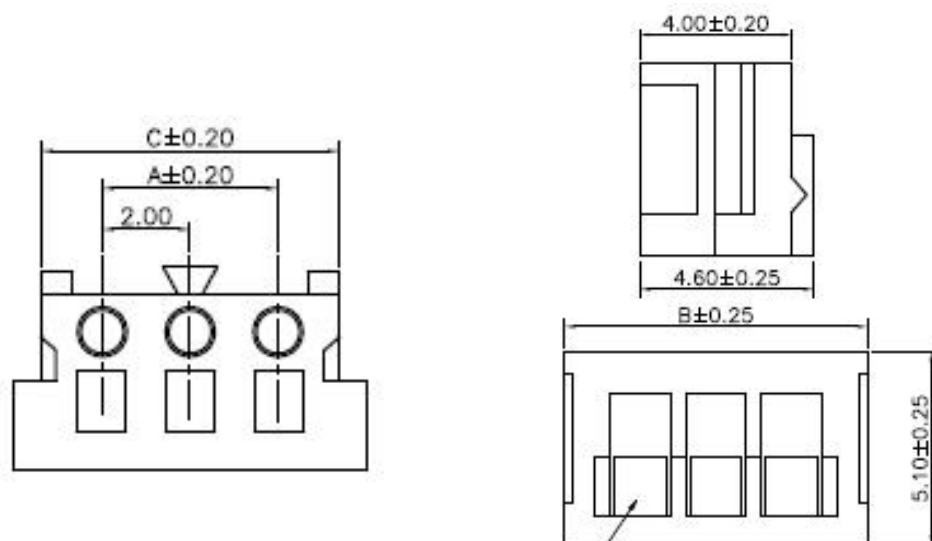

Circuit 1

Poles	Dimensions(mm)		
	A	B	C
02P	/	6.00	4.80
03P	4.00	8.00	6.80
04P	6.00	10.00	8.80
05P	8.00	12.00	10.80
06P	10.00	14.00	12.80
07P	12.00	16.00	14.80
08P	14.00	18.00	16.80
09P	16.00	20.00	18.80
10P	18.00	22.00	20.80
11P	20.00	24.00	22.80
12P	22.00	26.00	24.80
13P	24.00	28.00	26.80
14P	26.00	30.00	28.80
15P	28.00	32.00	30.80

Specifications:

Material And Finish:

Insulator:Phosphor Bronze

Rating:

Current Rating:3.0 Amp (24AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Wire Range:AWG#22~26

Insulation O.D:1.50mm Max



Ordering Information

H2013T-PX
1 2 3

1:—Series No.

2:—T:Terminal

3:—Q: Tin Plated

