


.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors

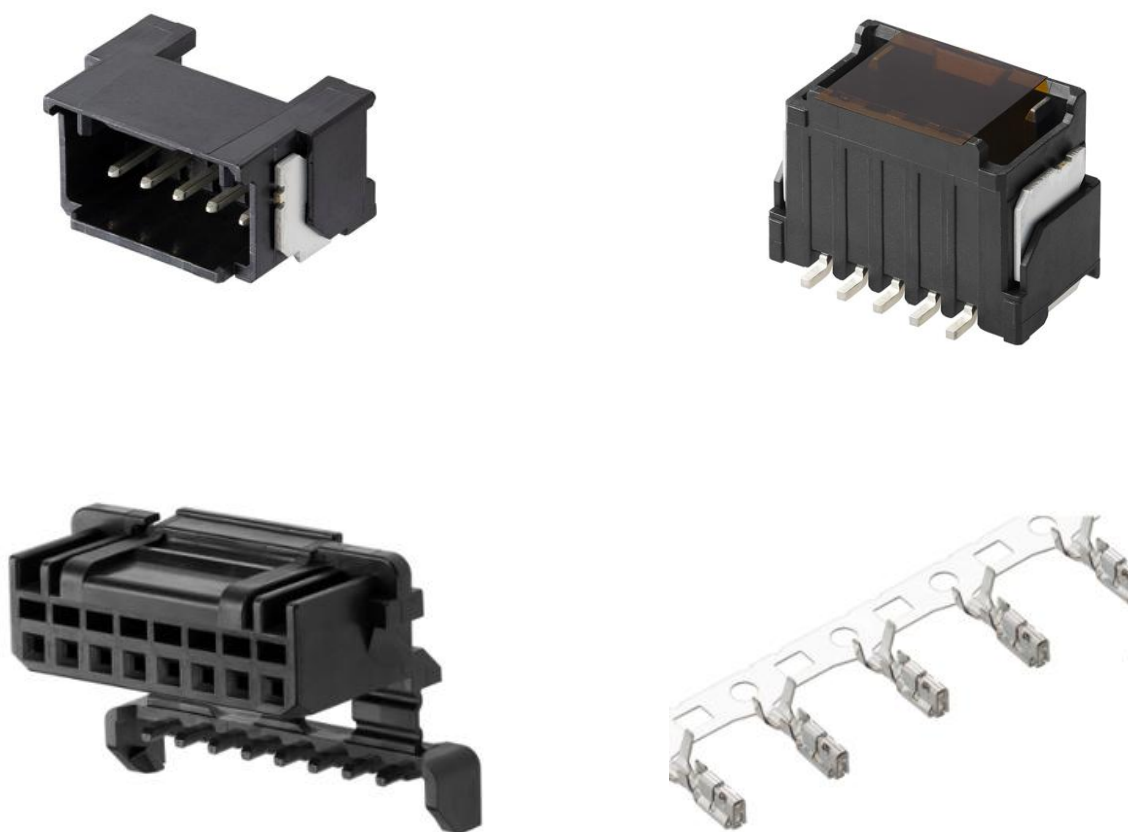

.079" (2.00mm) Pitch Housing / Terminal

HJBRIGHT®

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Rating:

Current Rating:4.0 Amp (2P/22AWG)

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute




Ordering Information


H2014-XXP-01-XA

1 2 34


- 1:— Series No.
- 2:— No. of Positions
- 3:— N:Natural
B:Black
- 4:— A:In Bag

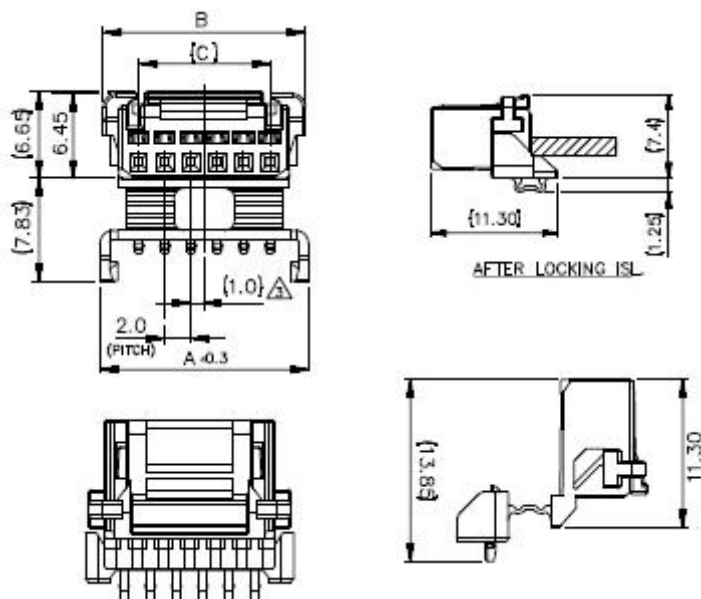

VIEW OF 2 CIRCUIT



VIEW OF 4 CIRCUIT

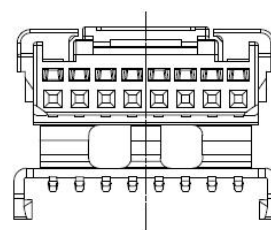


VIEW OF 8 CIRCUIT

Material:

Terminal:Copper alloy

Wire Range:AWG22~28

Insulation O.D.: 1.6mm/Min







Ordering Information


H2014T-PX

1 2 3


- 1:— Series No.
- 2:— T:Terminal
- 3:— A:Glod flash
Q: Tin plated

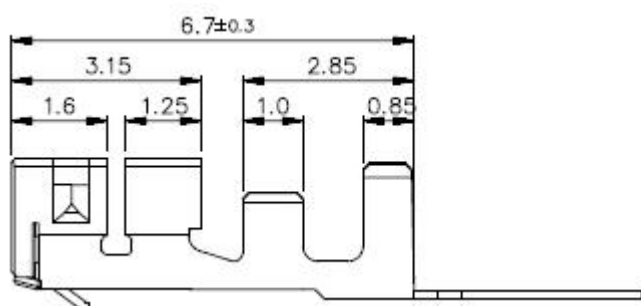


SECTION Z—Z



SECTION Y—Y



SECTION X—X



SECTION W—W

东莞市华晶电子有限公司
<http://www.hjbright.com>