


.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors

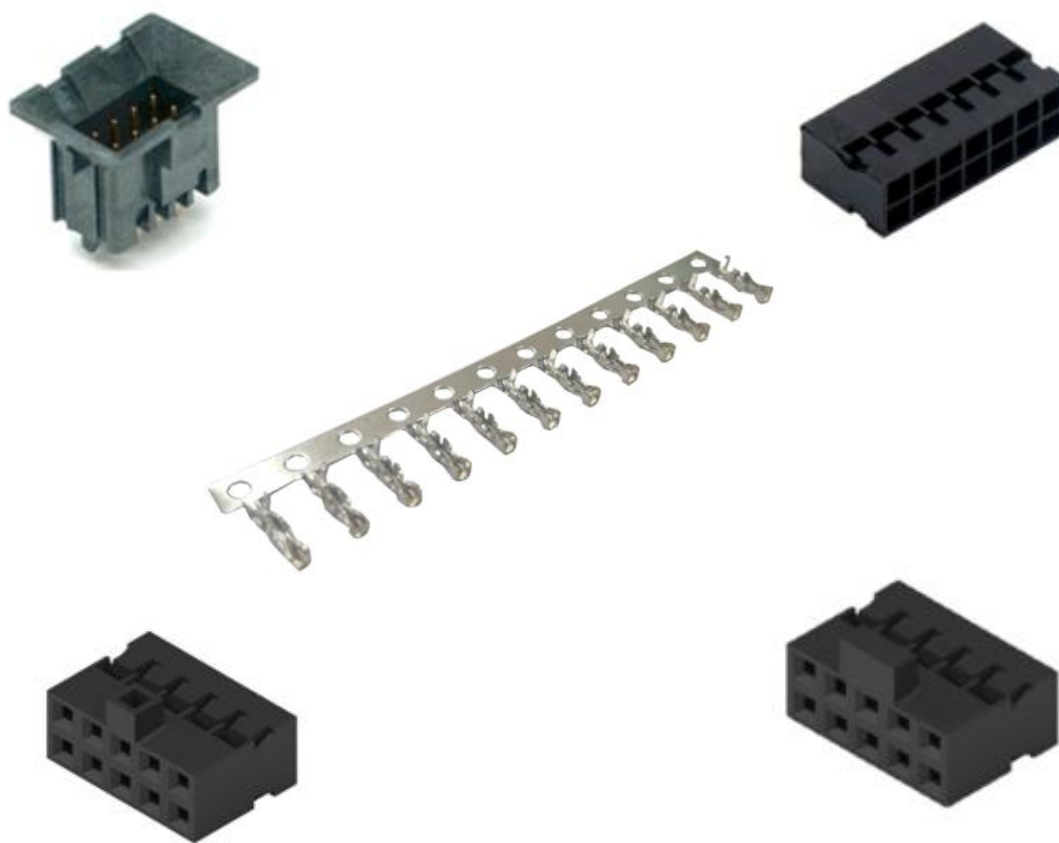

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0 Color:Black

Contact:Phosphor copper

Plated:See Ordering Information

Rating:

Current Rating:2.5 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:1000V AC/Minute



Ordering Information

A20150S-XXX-01-X

- 1:—Series No.
2:—S: Straight Type
3:—No. of Positions
4:—A: Gold Flash
Q: Tin Plated
S: Matte Tin Plated
H: Gold Flash on Contact; Matte Tin on tail
L: 15u" Gold on Contact; Matte Tin on tail
Y: 30u" Gold on Contact; Matte Tin on tail
5:—B: In Tube
C: In Tray
G: W/O in Tape & Reel
F: W/ Cap in Tape & Reel

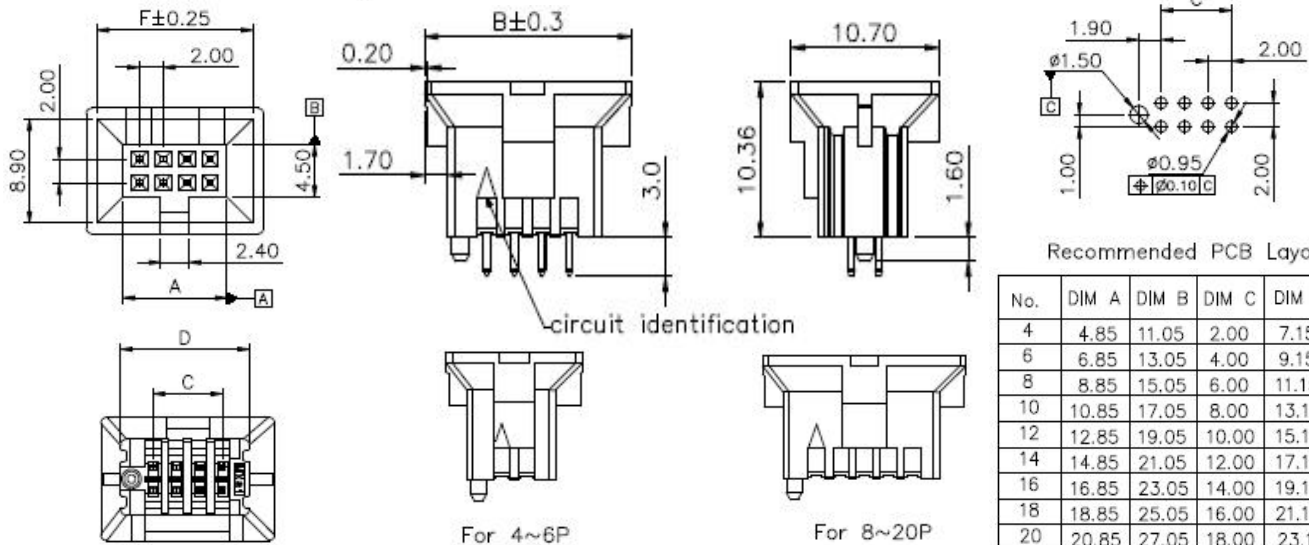

Specifications:

Material And Finish:

Insulator:PA66/PBT UL94V-0 Color:Black

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°C~105°C

Electrical:

Contact resistance:20m Ohm Max.

Insulator resistance:1000M ohm min.


Withstanding Voltage:1000V AC/Minute



Ordering Information

H20150-XXP-01-XA

- 1:—Series No.
2:—No. of Positions
3:—A: PA66
P: PBT
4:—A: In bag

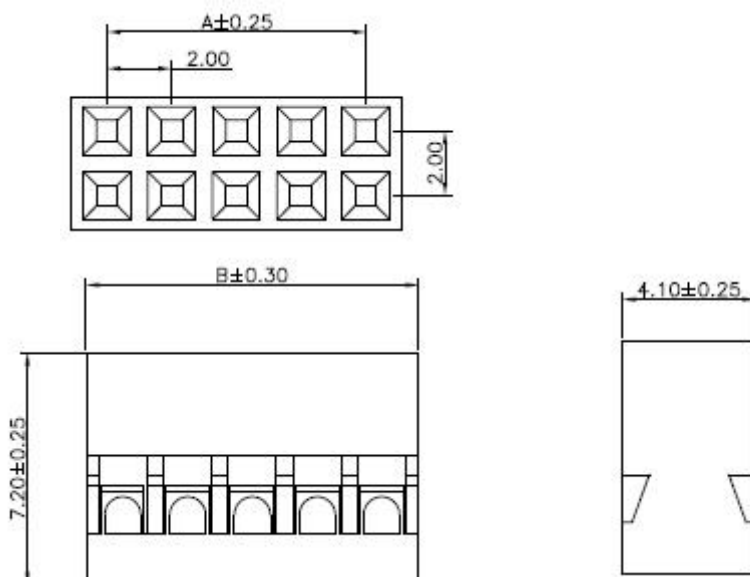

No.	Dimension mm		No.	Dimension mm	
	A	B		A	B
2*2	2.00	4.20	2*14	26.00	28.20
2*3	4.00	6.20	2*15	28.00	30.20
2*4	6.00	8.20	2*16	30.00	32.20
2*5	8.00	10.20	2*17	32.00	34.20
2*6	10.00	12.20	2*18	34.00	36.20
2*7	12.00	14.20	2*19	36.00	38.20
2*8	14.00	16.20	2*20	38.00	40.20
2*9	16.00	18.20	2*21	40.00	42.20
2*10	18.00	20.20	2*22	42.00	44.20
2*11	20.00	22.20	2*23	44.00	46.20
2*12	22.00	24.20	2*24	46.00	48.20
2*13	24.00	26.20	2*25	48.00	50.20

.079" (2.00mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:PA66/PBT UL94V-0 Color:Black

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25℃~85℃

Electrical:

Contact resistance:20m Ohm Max.

Insulator resistance:1000M ohm min.


Withstanding Voltage:1000V AC/Minute



Ordering Information

H20150-XXP-02-XA

- 1:—Series No.
2:—No. of Positions
3:—A:PA66
P:PBT
4:—A:In bag

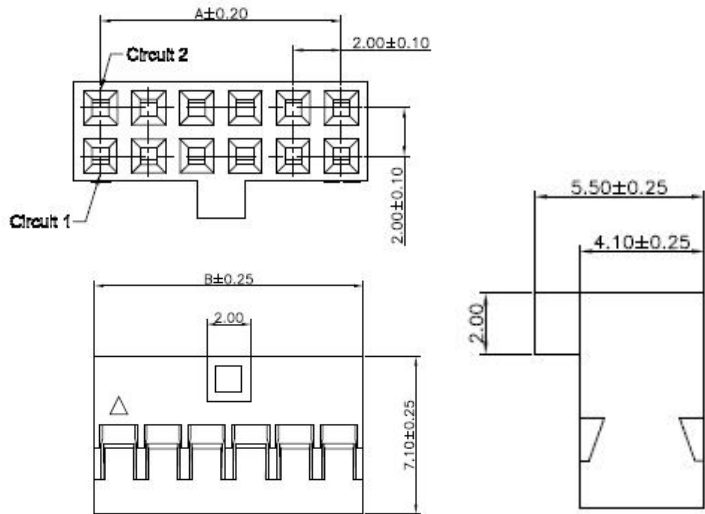

No.	Dimension mm		No.	Dimension mm	
	A	B		A	B
2*2	2.00	4.20	2*14	26.00	28.20
2*3	4.00	6.20	2*15	28.00	30.20
2*4	6.00	8.20	2*16	30.00	32.20
2*5	8.00	10.20	2*17	32.00	34.20
2*6	10.00	12.20	2*18	34.00	36.20
2*7	12.00	14.20	2*19	36.00	38.20
2*8	14.00	16.20	2*20	38.00	40.20
2*9	16.00	18.20	2*21	40.00	42.20
2*10	18.00	20.20	2*22	42.00	44.20
2*11	20.00	22.20	2*23	44.00	46.20
2*12	22.00	24.20	2*24	46.00	48.20
2*13	24.00	26.20	2*25	48.00	50.20

Specifications:

Material And Finish:

Insulator:PA66/PBT UL94V-0 Color:Black

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-40℃~105℃



Ordering Information

H20150-XXP-03-XA

- 1:—Series No.
2:—No. of Positions
3:—A:PA66
P:PBT
4:—A:In bag

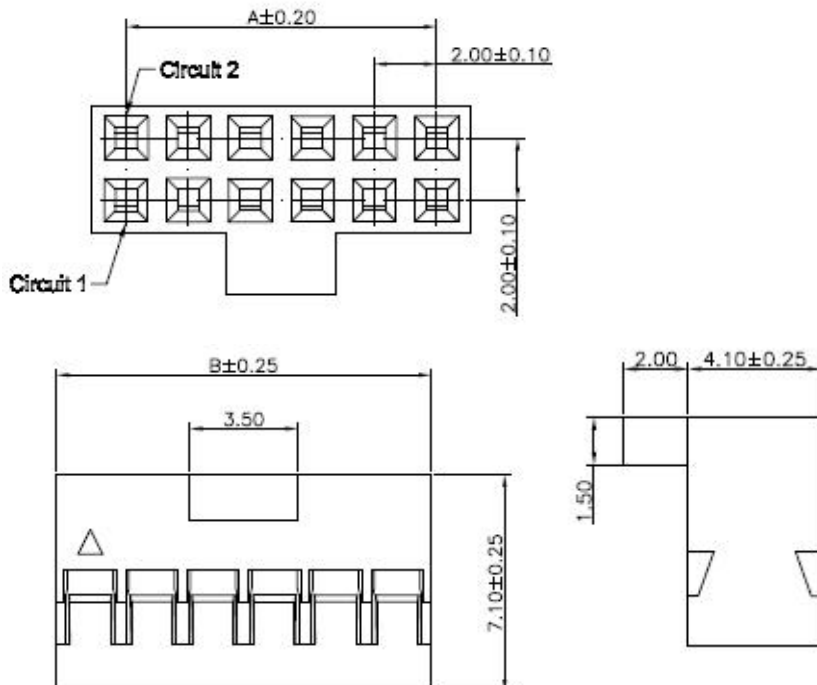

No.	Dimension mm		No.	Dimension mm	
	A	B		A	B
2*2	2.00	4.20	2*14	26.00	28.20
2*3	4.00	6.20	2*15	28.00	30.20
2*4	6.00	8.20	2*16	30.00	32.20
2*5	8.00	10.20	2*17	32.00	34.20
2*6	10.00	12.20	2*18	34.00	36.20
2*7	12.00	14.20	2*19	36.00	38.20
2*8	14.00	16.20	2*20	38.00	40.20
2*9	16.00	18.20	2*21	40.00	42.20
2*10	18.00	20.20	2*22	42.00	44.20
2*11	20.00	22.20	2*23	44.00	46.20
2*12	22.00	24.20	2*24	46.00	48.20
2*13	24.00	26.20	2*25	48.00	50.20

.079" (2.00mm) Pitch Terminal

Specifications:

Terminal: Phosphor Bronze/Brass
Plated: see ordering information




Wire Range: AWG#22~28
Insulation OD: 0.9~1.5mm

HJBRIGHT®


Ordering Information H2015T-XX

1 2 3 4


- 1: — Series No.
- 2: — Terminal
- 3: — P: Phosphor Bronze
B: Brass
- 4: — A: Gold flash
Q: Tin Plated
G3: 3u" Gold

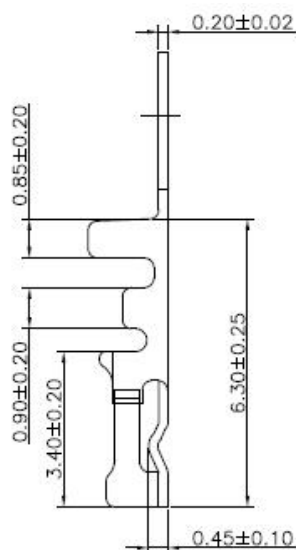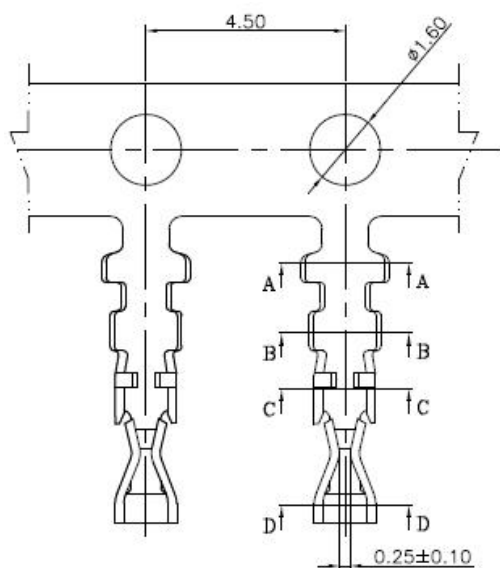


Section A-A



Section B-B



Section C-C



Section D-D