

.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator: PA66/PBT UL94V-0 Color: Black

Rating:

Current Rating: 2.0 Amp

Voltage Rating: 125V AC/DC


Operating Temperature Range: -40°~105°C

Electrical:

Contact resistance: 20m Ohm Max.

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC/Minute



HJBRIGHT®

Ordering Information

H2015-XXP-01-XA

1 2 3 4



1:—Series No.

2:—No. of Positions

3:—A: PA66

P: PBT

4:—A: In bag



No.	Dimension mm	
	A	B
1P	—	2.20
2P	2.00	4.20
3P	4.00	6.20
4P	6.00	8.20
5P	8.00	10.20
6P	10.00	12.20
7P	12.00	14.20
8P	14.00	16.20
9P	16.00	18.20
10P	18.00	20.20
11P	20.00	22.20
12P	22.00	24.20
13P	24.00	26.20

No.	Dimension mm	
	A	B
14P	26.00	28.20
15P	28.00	30.20
16P	30.00	32.20
17P	32.00	34.20
18P	34.00	36.20
19P	36.00	38.20
20P	38.00	40.20
21P	40.00	42.20
22P	42.00	44.20
23P	44.00	46.20
24P	46.00	48.20
25P	48.00	50.20

Specifications:

Terminal: Phosphor Bronze/Brass

Plated: see ordering information

Wire Range: AWG24~28

Insulation OD: 0.9~1.5mm



Ordering Information

H2015T-XX

1 2 3 4

1:—Series No.

2:—T: Terminal




3:—P: Phosphor Bronze

B: Brass


4:—A: Gold flash

Q: Tin Plated


G3: 3u" Gold

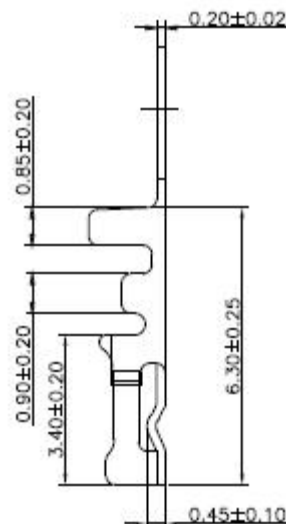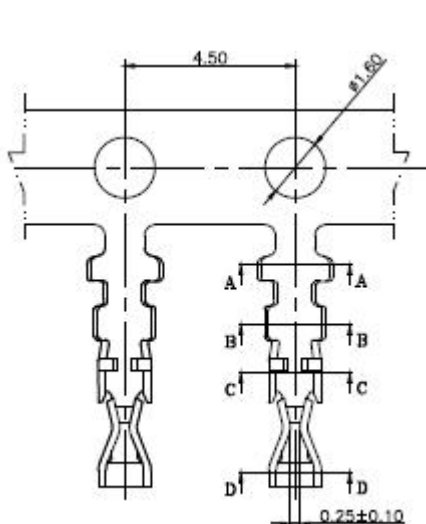


Section A-A



Section B-B



Section C-C



Section D-D

东莞市华晶电子有限公司
<http://www.hjbright.com>