




.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



Specifications:

Material And Finish:

Insulator: PA9T/LCP UL94V-0 Color:Natural
Contact:Brass

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:125V AC/DC


Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

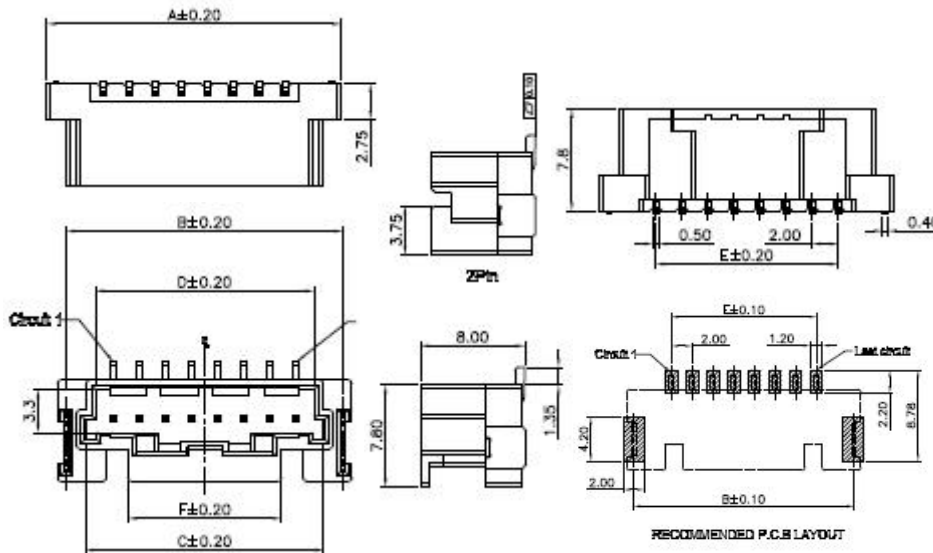

Ordering Information

A2018M-XXS-01-XXF

1 2 3 4 567

- 1: Series No.
- 2: M:SMT Type
- 3: No. of Positions
- 4: S:Matte Tin Plated
- 5: Material:
G:PA9T
C:LCP
- 6: Color:
N=Natural
B=Black
R=Red
L=Blue

7: F:W/Cap in Tape&reel

Poles	Dimensions (mm)					
	A	B	C	D	E	F
02P	10.60	9.23	6.30	4.80	2.00	6.30
03P	12.60	11.23	8.30	6.80	4.00	5.80
04P	14.60	13.23	10.30	8.80	6.00	7.80
05P	16.60	15.23	12.30	10.80	8.00	9.80
06P	18.60	17.23	14.30	12.80	10.00	
07P	20.60	19.23	16.30	14.80	12.00	
08P	22.60	21.23	18.30	16.80	14.00	
09P	24.60	23.23	20.30	18.80	16.00	
10P	26.60	25.23	22.30	20.80	18.00	
11P	28.60	27.23	24.30	22.80	20.00	
12P	30.60	29.23	26.30	24.80	22.00	
13P	32.60	31.23	28.30	26.80	24.00	
14P	34.60	33.23	30.30	28.80	26.00	
15P	36.60	35.23	32.30	30.80	28.00	

Specifications:

Material And Finish:

Insulator: PA9T/LCP UL94V-0

Contact: Brass

Rating:

Current Rating: 3.0 Amp(22AWG)

Voltage Rating:125V AC/DC


Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage: 500V AC/Minute

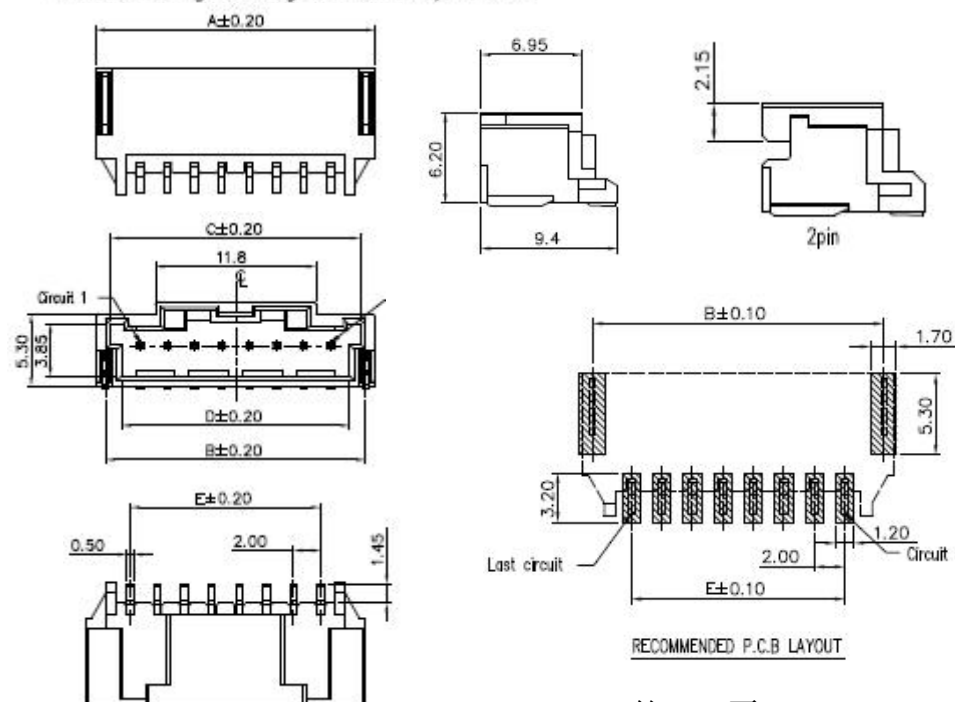

Ordering Information

A2018H-XXS-01-XXG

1 2 3 4 567

- 1: Series No.
- 2: H:Horizontal SMT Type
- 3: No. of Positions
- 4: S:Matte Tin Plated
- 5: Material:
G: PA9T
C: LCP
- 6: Color:
N=Natural
B=Black
R=Red
L=Blue

7: G:In Tape&reel

Poles	Dimensions (mm)				
	A	B	C	D	E
02P	8.50	7.13	6.30	4.80	2.00
03P	10.50	9.13	8.30	6.80	4.00
04P	12.50	11.13	10.30	8.80	6.00
05P	14.50	13.13	12.30	10.80	8.00
06P	16.50	15.13	14.30	12.80	10.00
07P	18.50	17.13	16.30	14.80	12.00
08P	20.50	19.13	18.30	16.80	14.00
09P	22.50	21.13	20.30	18.80	16.00
10P	24.50	23.13	22.30	20.80	18.00
11P	26.50	25.13	24.30	22.80	20.00
12P	28.50	27.13	26.30	24.80	22.00
13P	30.50	29.13	28.30	26.80	24.00
14P	32.50	31.13	30.30	28.80	26.00
15P	34.50	33.13	32.30	30.80	28.00

.079" (2.00mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0,
Color:Natural(White)

Rating:

Current Rating:3 Amp

Voltage Rating:125V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.


Withstanding Voltage:250V AC/Minute



Ordering Information

H2018-02P-XX-A
1 2 3 4

- 1: — Series No.
- 2: — No. of Positions
- 3: — 01:A Type
02:B Type
03:C Type
- 4: — A:In Bag

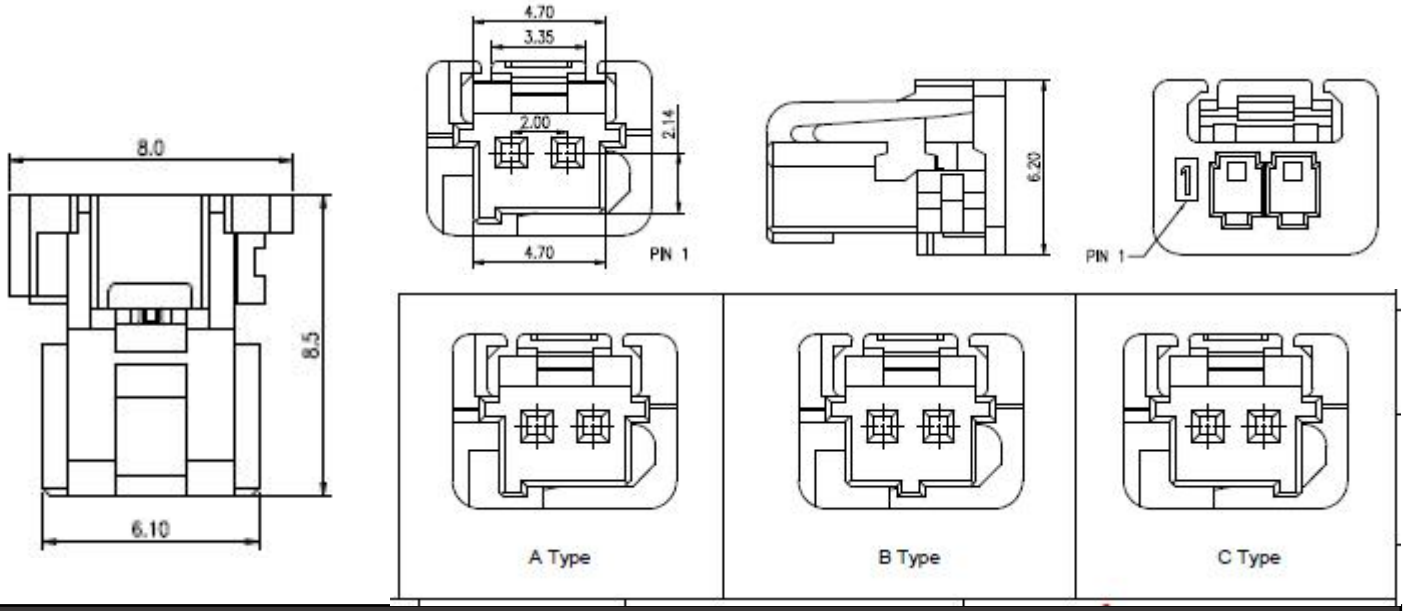

Specifications:

Material And Finish:

Insulator:PA66/PBT UL94V-0 Color:Natural
See ordering Information

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:125V AC/DC


Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.



Withstanding Voltage:500V AC/Minute




Ordering Information

H2018-XXP-XX-A
1 2 3 4 5


- 1: — Series No.
- 2: — No. of Positions
- 3: — Material:
P: PBT
L: PA66
- 4: — Color:
N=Natural
B=Black
- 5: — A:In Bag

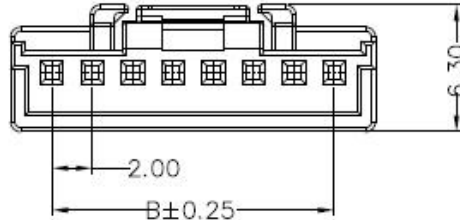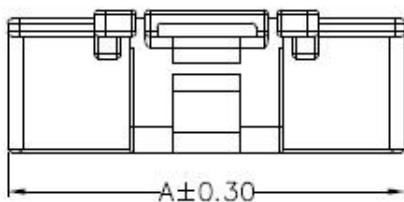

05P~15P Shape
Scale 1:1



03P~04P Shape
Scale 0.8:1



02P Shape
Scale 0.8:1

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02P	8.00	2.00	09P	20.10	16.00
03P	8.10	4.00	10P	22.10	18.00
04P	10.10	6.00	11P	24.10	20.00
05P	12.10	8.00	12P	26.10	22.00
06P	14.10	10.00	13P	28.10	24.00
07P	16.10	12.00	14P	30.10	26.00
08P	18.10	14.00	15P	32.10	28.00

.079" (2.00mm) Pitch TPA / Terminal

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0,
Color:Natural(White)

Rating:


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:250V AC/Minute



HJBRIGHT®





Ordering Information

H2018-02P-TPA-A
1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag




Material:

Terminal:Phosphor Bronze

Wire Range:AWG#22~30

Insulation O.D.:1.40mm/Max








Ordering Information

H2018T-PQ
1 2 3

1: — Series No.

2: — T: Terminal

3: — Q: Tin Plated

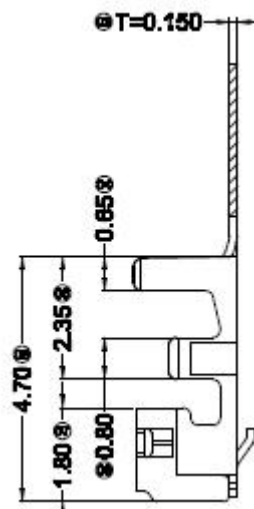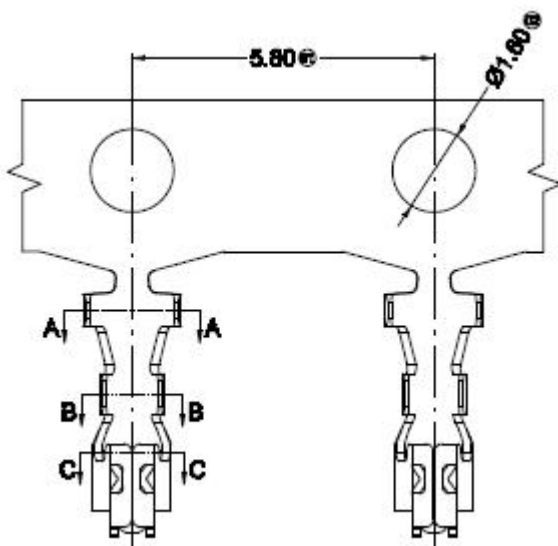

东莞市华晶电子有限公司
<http://www.hjbright.com>