

.079"(2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079"(2.00mm) Connectors



.079" (2.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:BLACK

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.



Withstanding Voltage:650V AC/Minute



Ordering Information

H20230-XXP-01-A

- 1: — Series No.
2: — No. of Positions
3: — In bag

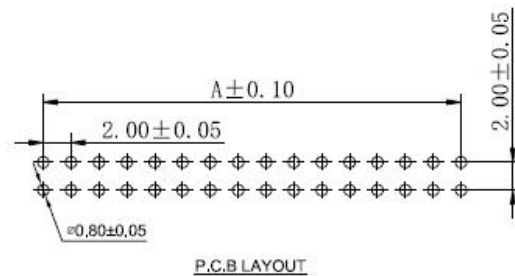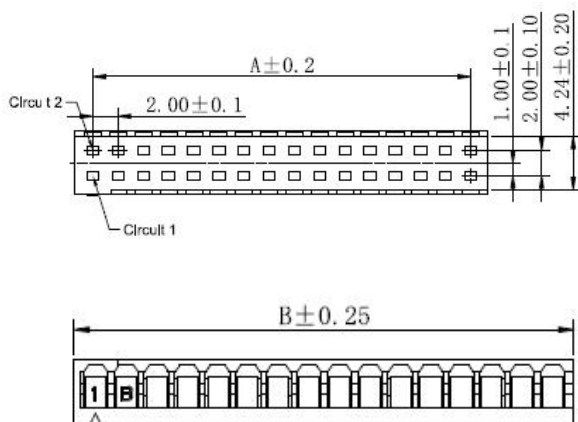

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	4.80	2x10P	18.00	20.80
2x3P	4.00	8.80	2x11P	20.00	22.80
2x4P	6.00	8.80	2x12P	22.00	24.80
2x5P	8.00	10.80	2x13P	24.00	26.80
2x6P	10.00	12.80	2x14P	26.00	28.80
2x7P	12.00	14.80	2x15P	28.00	30.80
2x8P	14.00	16.80	2x16P	30.00	32.80
2x9P	16.00	18.80			

Specifications:

Material:Phosphor Bronze

Range:AWG#24~28

Insulation O.D.:1.20(max)



Ordering Information

H20230T-PX

- 1: — Series No.
2: — T:Terminal
3: — A:Gold Flash
Q:Plated Tin

