

.079''(2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079''(2.00mm) Connectors



.079" (2.00mm) Pitch SMT Wafer

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1100V AC/Minute



Ordering Information

A2024H-XXQ-XX-G

1 2 3 4 5 6

1:—Series No.

2:—H:Horizontal SMT Type



3:—No. of Positions

4:—Q:Tin Plated

5:—01:A TYPE Natural

02:B TYPE Black

6:—G:W/O Cap In Tape&Reel

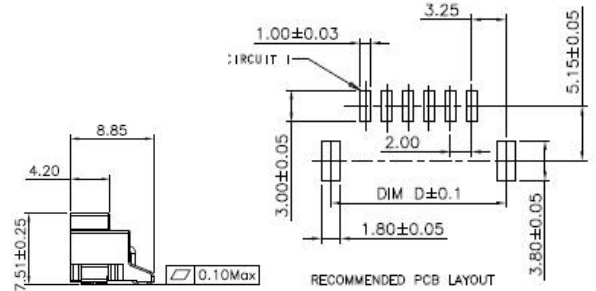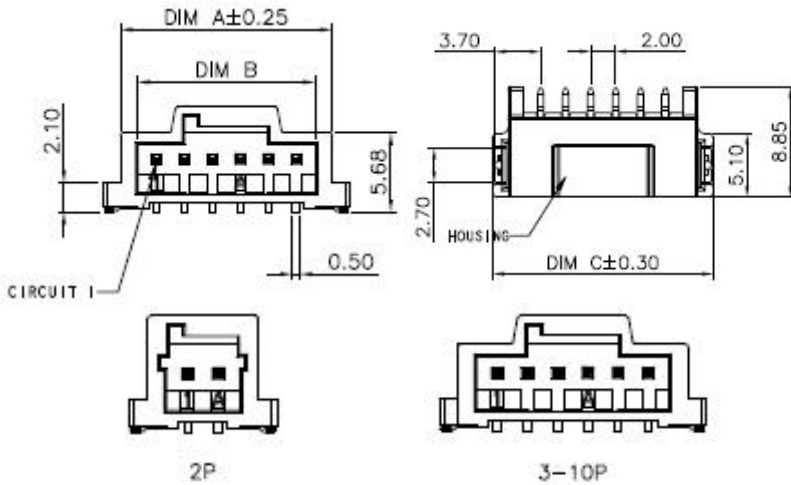

POSITION	DIM. A	DIM. B	DIM. C	DIM. D
10	23.2	20.72	25.60	24.50
9	21.2	18.72	23.60	22.50
8	19.2	16.72	21.60	20.50
7	17.2	14.72	19.60	18.50
6	15.2	12.72	17.60	16.50
5	13.2	10.72	15.60	14.50
4	11.2	8.72	13.60	12.50
3	9.2	6.72	11.60	10.50
2	7.2	4.72	9.60	8.50