

.087"(2.20mm) Pitch/Disconnectable Insulation Displacement Connectors

.087"(2.20mm) Connectors



.087" (2.20mm) Pitch 90° Wafer / Housing

HJBRIGHT®

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Gray

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.





Withstanding Voltage:1000V AC/Minute



Ordering Information

A2200R-04Q-01-C

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — C: In Tray

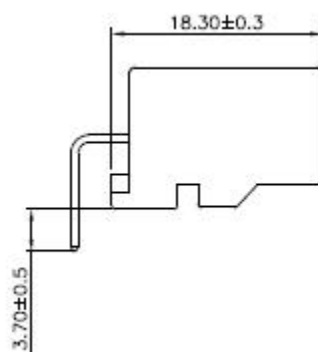

Recommended PCB Layout

Specifications:

Material And Finish:

Insulator:PBT,UL94V-0,Color:White

Wire Rang:0.3-0.5MM²




Temperature Range:-40°C~+125°C



Ordering Information

H2200-04P-A

- 1: — Series No.
2: — No. of Positions
3: — A: In Bag

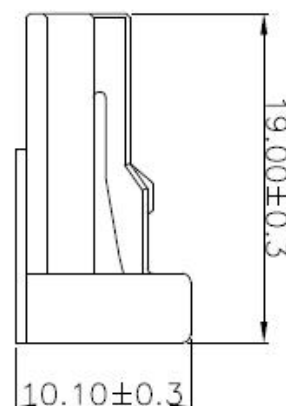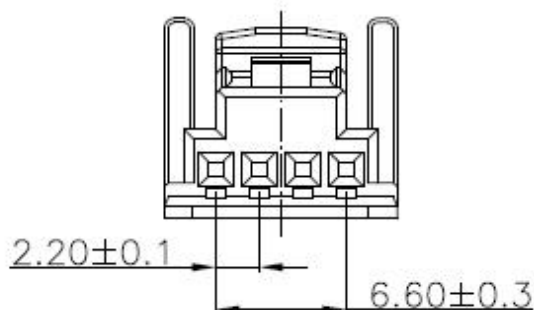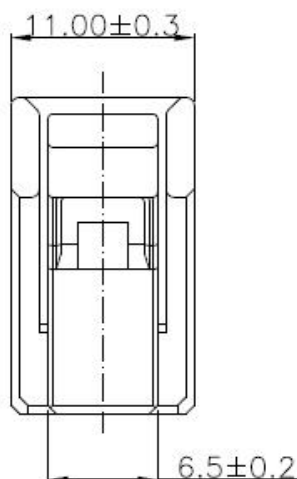

.087" (2.20mm) Pitch Terminal

Material:

Material: Phosphor Bronze

Plating: Tin Plated

WIRE Range: 0.3~0.5mm²

Temperature Range: -40°C~125°C

Qty/Reel: 8000PCS



HJBRIGHT®

Ordering Information

H22011T-PQ

1 2 3

1: — Series No.

2: — T: Terminal

3: — Q: Tin Plated

