

.087"(2.20mm) Pitch/Disconnectable Insulation Displacement Connectors

.087"(2.20mm) Connectors



.087" (2.20mm) Pitch 90° Wafer / Housing

HJBRIGHT®

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color: Gray

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC





Operating Temperature Range:-40°C~+125°C



Ordering Information

A2203R-04Q-01-C
1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — C: In Tray

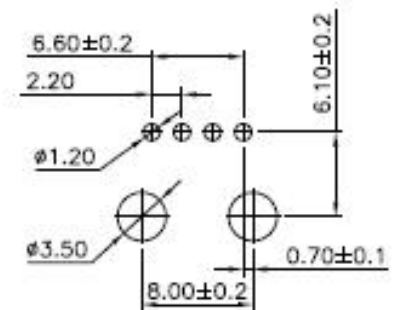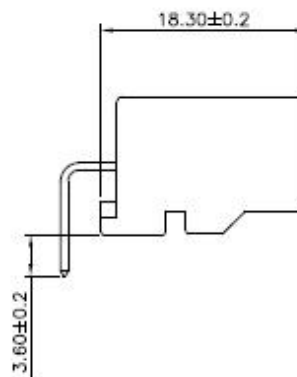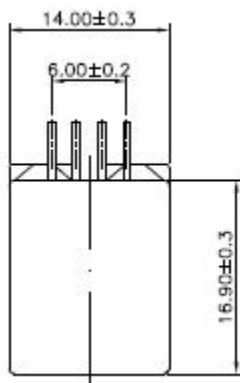

Recommended PCB Layout

Specifications:

Material And Finish:

Insulator:PBT,UL94V-0,Color:White

Wire Rang:0.3—0.5MM²




Temperature Range:-40°C~+125°C



Ordering Information

H2203-04P-A
1 2 3

- 1: — Series No.
- 2: — No. of Positions
- 3: — A: In Bag

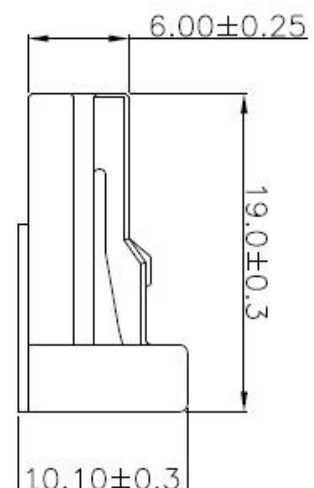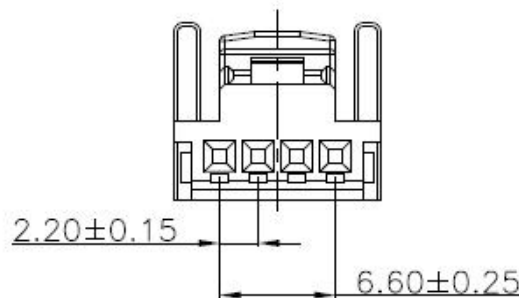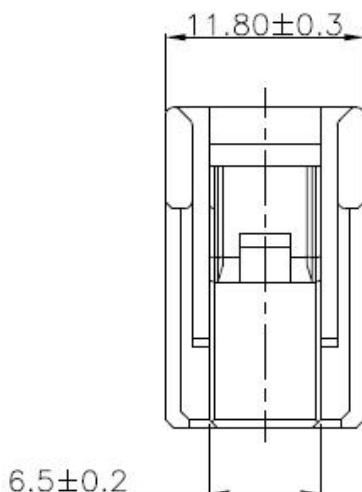

.087" (2.20mm) Pitch Terminal

Material:

Material: Phosphor Bronze

Plating: Tin Plated

WIRE Range: 0.3~0.5mm²

Temperature Range: -40°C~125°C

Qty/Reel: 8000PCS

HJBRIGHT®

Ordering Information

H22011T-PQ

1 2 3

1: — Series No.

2: — T: Terminal

3: — Q: Tin Plated

