
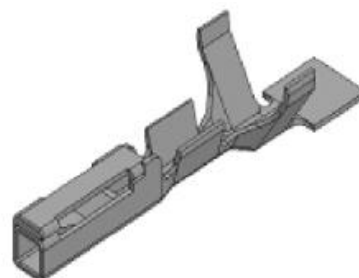



.098" (2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098" (2.50mm) Connectors

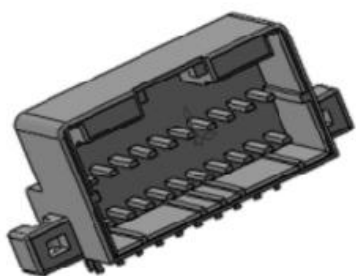

.098" (2.50mm) Pitch 90° / 180° Wafer

Specifications:

Material And Finish:

Insulator:PBT Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp(20AWG)




Voltage Rating:12V AC/DC

Operating Temperature Range:-30°~+105°C

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V Max

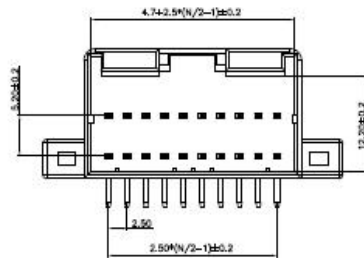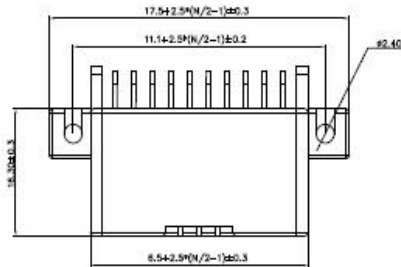


HJBRIGHT®


Ordering Information

A25009R-XXX-01-C
1 2 3 4 5

- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Flash
Q:Tin Plated
S:Matte Tin Plated
5:—B:In Tube
C:In Tray



PCB LAYOUT



Specifications:

Material And Finish:

Insulator:PBT Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp(20AWG)

Voltage Rating:12V AC/DC



Operating Temperature Range:-30°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.


Withstanding Voltage:1000V Max

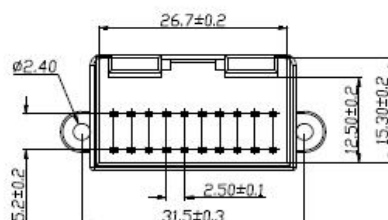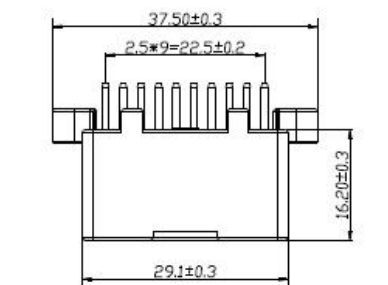


Ordering Information

A25009S-20Q-01-C
1 2 3 4 5

- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—Q:Tin Plated
5:—C:In Tray

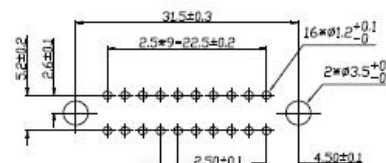

PCB LAYOUT



东莞市华晶电子有限公司
<http://www.hjbright.com>

.098" (2.50mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:PBT Color:Black

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp(20AWG)


Voltage Rating:12V AC/DC

Operating Temperature Range:-30°~+105°C

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V Max



HJBRIGHT®




Ordering Information

H25009-XX-01-A
1 2 3

1:—Series No.

2:—No. of Positions

3:—A:In bag



Specifications:


Material :Copper alloy

Plating: Tin Plated

Wire Size:AWG #22-#20

Current Rating:5.0 Amp

Operating Temperature Range:-30°~+105°C





Ordering Information

H25009T-PQ
1 2 3

1:—Series No.

2:—Terminal

3:—Q: Tin Plated

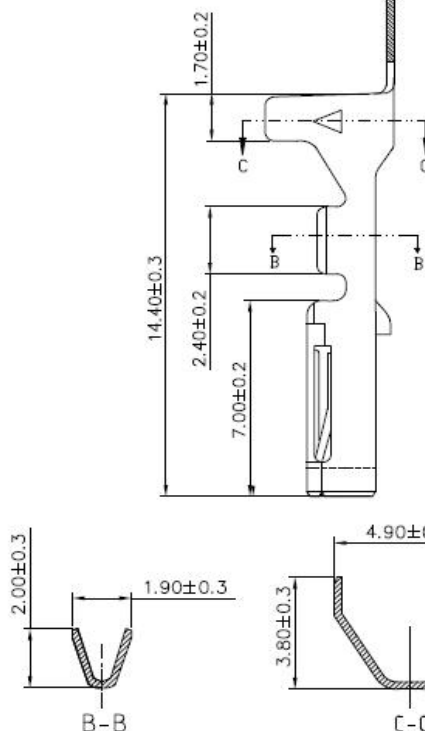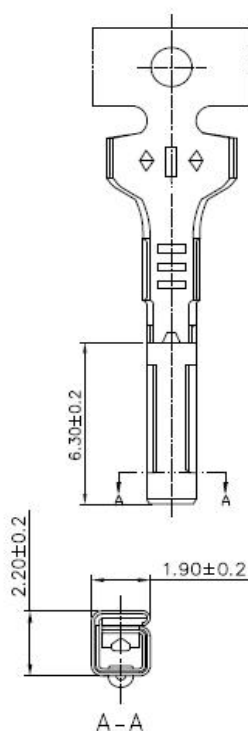

东莞市华晶电子有限公司
<http://www.hjbright.com>