


.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors

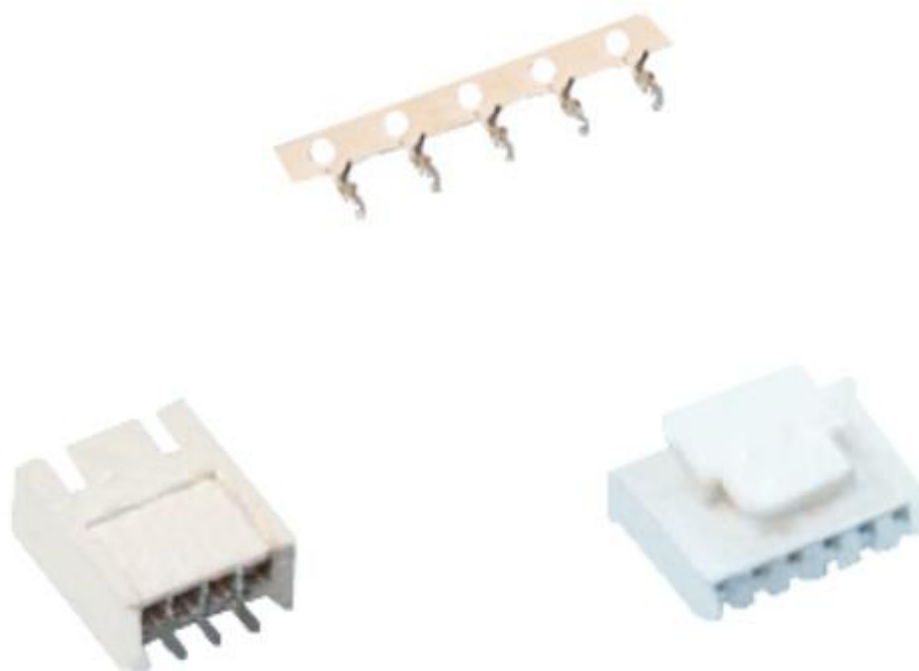

.098" (2.50mm) Pitch 180° Wafer / Housing

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Nature

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1000V AC/Minute



Ordering Information

A2500S-XXQ-01-A

1 2 3 4 5


1:—Series No.

2:—S: Straight Type

3:—No. of Positions

4:—Q: Tin Plated

5:—A: In Bag

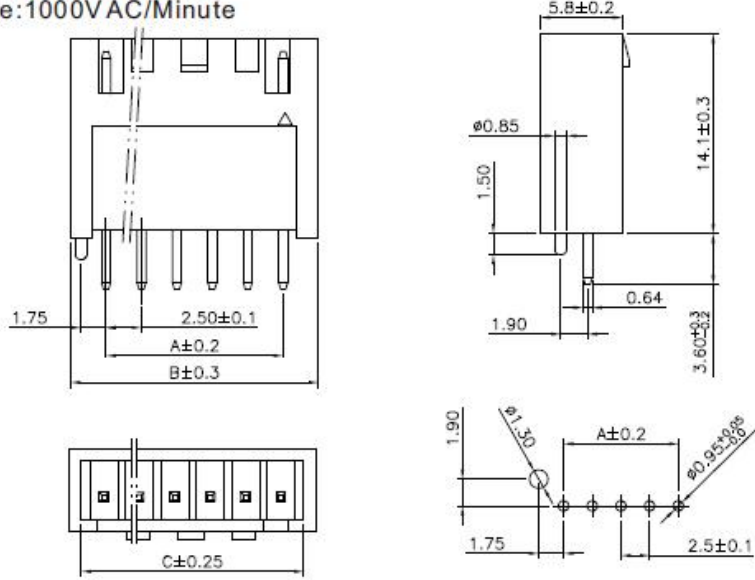

Pin	Dimension mm		
	A	B	C
02	2.50	7.50	5.70
03	5.00	10.00	8.20
04	7.50	12.50	10.70
05	10.00	15.00	13.20
06	12.50	17.50	15.70
07	15.00	20.00	18.20
08	17.50	22.50	20.70
09	20.00	25.00	23.20
10	22.50	27.50	25.70
11	25.00	30.00	28.20
12	27.50	32.50	30.70
13	30.00	35.00	33.20
14	32.50	37.50	35.70
15	35.00	40.00	38.20

P.C.B LAYOUT

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color: Nature

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1000V AC/Minute



Ordering Information


H2500-XXP-01-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A: In Bag

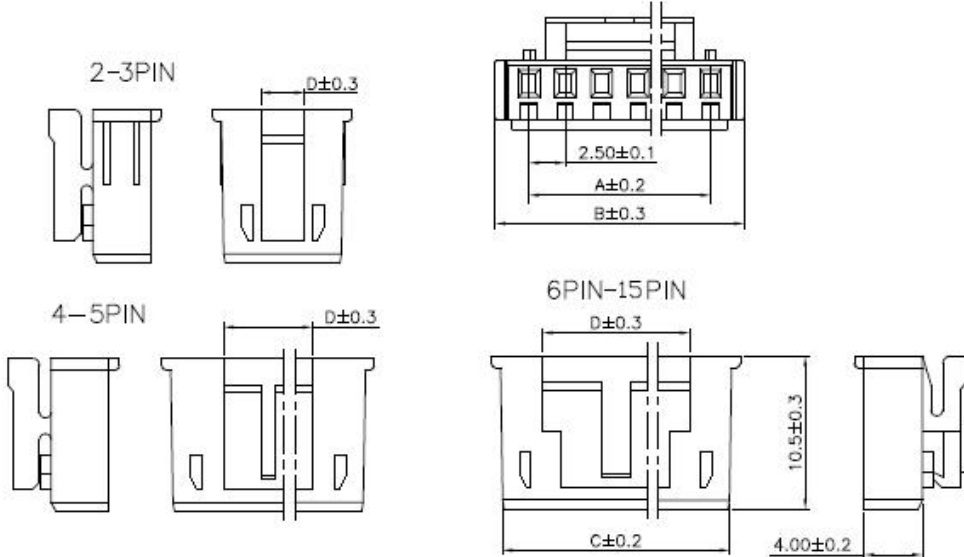

Pin	Dimension mm			
	A	B	C	D
02	2.50	7.00	5.70	3.00
03	5.00	9.50	8.10	3.00
04	7.50	12.00	10.60	5.00
05	10.00	14.50	13.10	6.00
06	12.50	17.00	15.60	10.00
07	15.00	19.50	18.10	11.00
08	17.50	22.00	20.60	12.00
09	20.00	24.50	23.10	13.00
10	22.50	27.00	25.60	14.00
11	25.00	29.50	28.10	15.00
12	27.50	32.00	30.60	16.00
13	30.00	34.50	33.10	17.00
14	32.50	37.00	35.60	18.00
15	35.00	39.50	38.10	19.00

.098" (2.50mm) Pitch Terminal

HJBRIGHT®

Specifications:

Material: Phosphor Bronze

Wire Sizes: AWG#22~28#

Insulation O.D.: 1.90mm (max)

Plating: Tin Plated

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute



Ordering Information

H2500T-PQ
1 2 3

1:— Series No.

2:— T: Terminal

3:— Q: Tin Plated

