
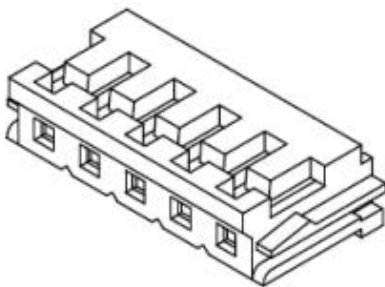


.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors



.098" (2.50mm) Pitch 90° / 180° Wafer

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0 Color: Natural

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40° ~ +105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute







Ordering Information

A2502R-XXX-01-A

1 2 3 4 5

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In Bag

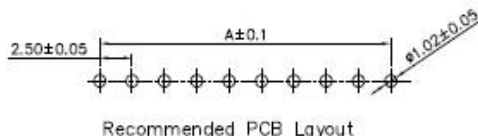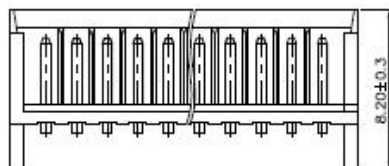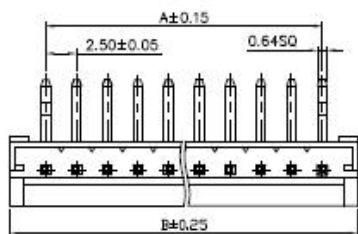

Circuits	Dimension mm	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0 Color: Natural

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40° ~ +105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute







Ordering Information

A2502S-XXX-01-A

1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In Bag

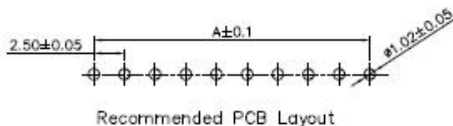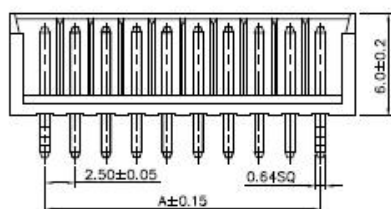

Circuits	Dimension mm	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

.098" (2.50mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC



Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute

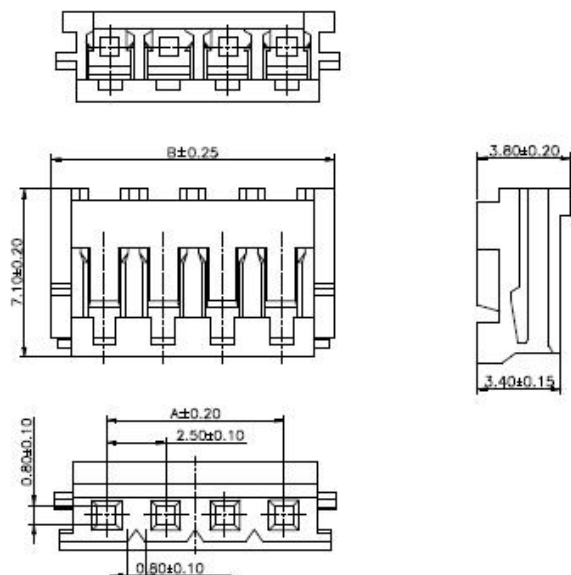

HJBRIGHT®

Ordering Information

H2502-XXP-XA

1 2 3 4

- 1:—Series No.
2:—No. of Positions
3:—N: Natural (White)
B: Black
R: Red
Y: Yellow
O: Orange
L: Lemon yellow
GR: Gray
TR: Tomato red
BL: Blue
GN: Green
BR: Brown
PL: Purple
PK: Pink
LE: light blue
FY: Vivid yellow
4:—A: In Bag

Dimensional Ordering Information:		
Part No Circuits	Dimensions	
	A	B
2P	2.50	7.00
3P	5.00	9.50
4P	7.50	12.00
5P	10.00	14.50
6P	12.50	17.00
7P	15.00	19.50
8P	17.50	22.00
9P	20.00	24.50
10P	22.50	27.00
11P	25.00	29.50
12P	27.50	32.00
13P	30.00	34.50
14P	32.50	37.00
15P	35.00	39.50


Specifications:

Material And Finish:

Material: Phosphor Bronze

Wire Range: AWG #22-28

QTY: 10,000 PCS/REEL

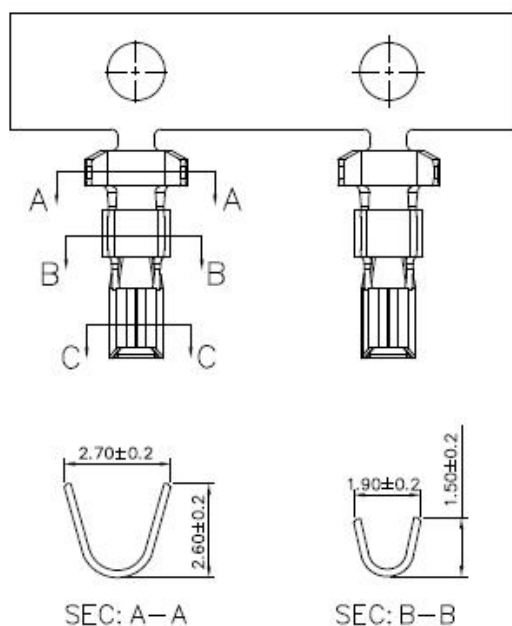


Ordering Information

H2502T-PX

1 2 3

- 1:—Series No.
2:—Terminal
3:—A: Gold Flash
Q: Tin Plated

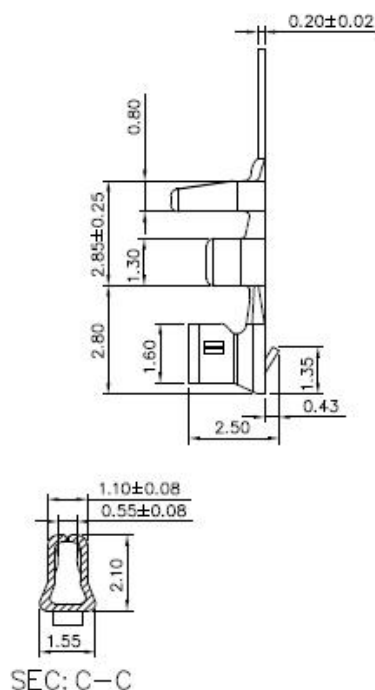

东莞市华晶电子有限公司
<http://www.hjbright.com>