


.098”(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098”(2.50mm) Connectors

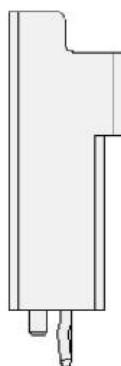

.098" (2.50mm) Pitch 180° Wafer

HJBRIGHT®

Specifications:

Material And Finish:

Insulator:Nylon UL94V-0 **Color:**Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:1000V AC/Minute





Ordering Information

A2507S-XXQ-XX-X
1 2 3 4 5 6

- 1:—Series No.
2:—S: Straight Type
3:—No. of Positions
4:—Q: Tin Plated
5:—01:W/0 Peg
02:W/1 Peg
6:—A: In Bag
B: In Tube
C: In Tray

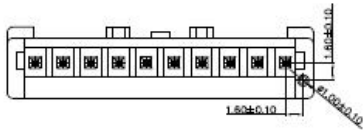

02: W/1 Peg

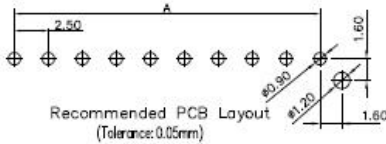

Circuits	Dimension mm		
	A	B	C
02	2.50	7.50	5.90
03	5.00	10.00	8.40
04	7.50	12.50	10.90
05	10.00	15.00	13.40
06	12.50	17.50	15.90
07	15.00	20.00	18.40
08	17.50	22.50	20.90
09	20.00	25.00	23.40
10	22.50	27.50	25.90
11	25.00	30.00	28.40
12	27.50	32.50	30.90
13	30.00	35.00	33.40
14	32.50	37.50	35.90
15	35.00	40.00	38.40