

.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors



.098" (2.50mm) Pitch 90° Wafer / Housing

Specifications:

Material And Finish:

Insulator:PBT Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp(20AWG)


Voltage Rating:12V AC/DC

Operating Temperature Range:-40°~+105°C

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute



Ordering Information

A25120R-34Q-01-X

1 2 3 4 5

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—A:Gold Flash

H:Selective Gold

Flash

Q:Tin Plated



S:Matte Tin Plated

5:—A:In bag

B:In Tube

C:In Tray

Poles	Dimensions(mm)			
	A	B	C	D
12P	21.9	12.5	22.5	23.5
18P	29.4	20.0	30.0	31.0
26P	44.0	30.0	40.0	41.0
34P	54.0	40.0	50.0	51.0

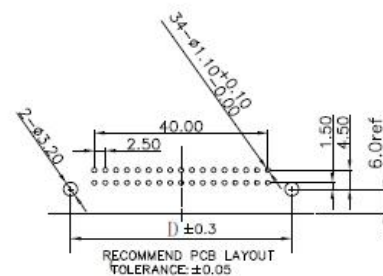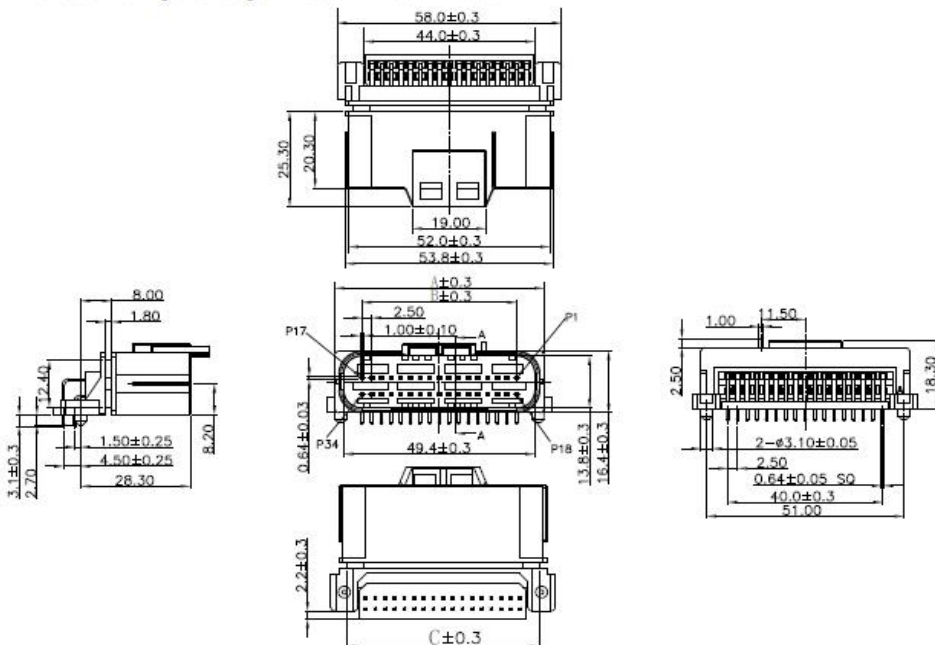

Specifications:

Material And Finish:

Insulator:PBT Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp(20AWG)


Voltage Rating:12V AC/DC

Operating Temperature Range:-40°~+105°C

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute



Ordering Information


H25120-34P-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A:In Bag

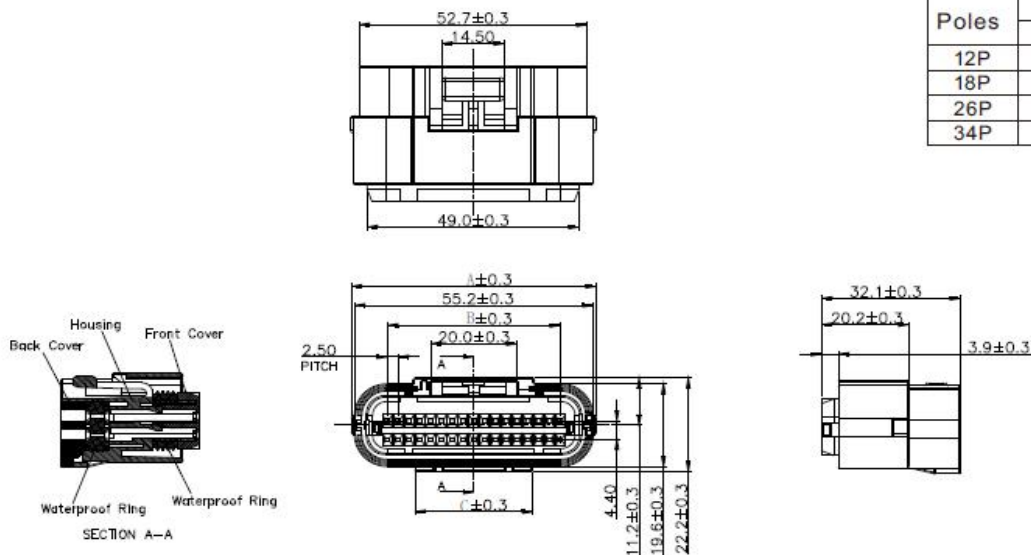

Poles	Dimensions(mm)		
	A	B	C
12P	29.1	12.5	8.2
18P	36.6	20.0	13.2
26P	46.6	30.0	27.5
34P	56.6	40.0	27.5

.098" (2.50mm) Pitch 90° Wafer / Housing

HJBRIGHT®

Specifications:

Material And Finish:

Insulator:30%GF PBT Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M Ohm min.

Dielectric Voltage:1000V AC/Minute



Ordering Information

A25120R-36Q-01-X

1 2 3 4 5

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—A:Gold Flash

H:Selective Gold Flash






Q:Tin Plated

S:Matte Tin Plated

5:—A:In bag

B:In Tube

C:In Tray

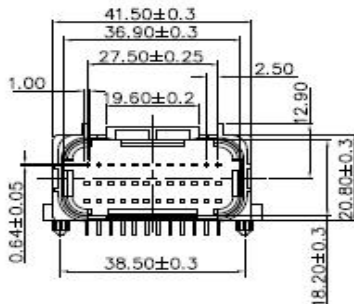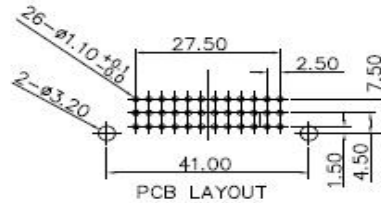

Specifications:

Material:

Insulator:PBT UL94V-0 Black

Front Cover:PBT,Color:Yellow

Back Cover:PBT,Color:Gray

Waterproof Ring:Silicone Rubber,Blue.



Ordering Information






H25120-36P-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A:In Bag

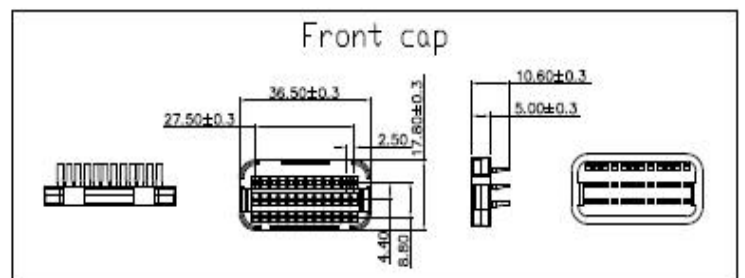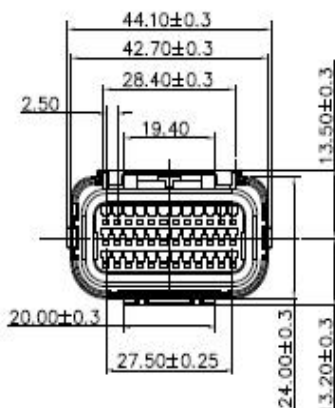

东莞市华晶电子有限公司
<http://www.hjbright.com>

.098" (2.50mm) Pitch Terminal

Specifications:

Material: Phosphoric copper

Plated: Tin Plating

Applicable wire sizes:

Insulation O.D: $\varnothing 1.4 \sim 1.9$

Insulation O.D: $\varnothing 1.4 \sim 2.3$

HJBRIGHT®

Ordering Information

H25120T-PX-XX

1 2 3 4

1:—Series No.

2:—T:Terminal

3:—Q:Plated Tin

4:—01:OD. $\varnothing 1.4 \sim 1.9$

02:OD. $\varnothing 1.4 \sim 2.3$

