


.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors

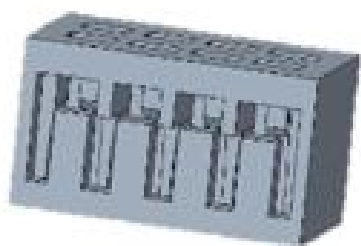

.098" (2.50mm) Pitch Housing / Terminal

Specifications:

Material:

Insulator:PA66 UL94V-0 Color:White

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C

Electrical:

Contact Resistance:20m ohm min.

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute




Ordering Information

H25140AS-XXP-XXA

1 2 3 4 5 6

- 1:— Series No.
- 2:— S: Straight Type Housing
- 3:— No. of Positions
- 4:— L:PA66
C:LCP
G:PA9T
N:PA6T
- 5:— Color:
N:Natural
B:Black
- 6:— A:In Bag
B:In Tube
C:In Tray

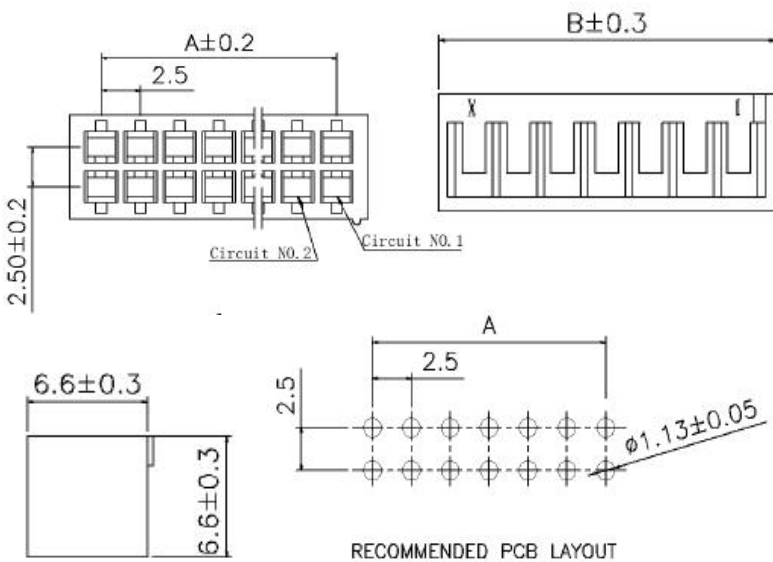

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2X2	2.50	6.50	2X12	27.50	31.50
2X3	5.00	9.00	2X13	30.00	34.00
2X4	7.50	11.50	2X14	32.50	36.50
2X5	10.00	14.00	2X15	35.00	39.00
2X6	12.50	16.50	2X16	37.50	41.50
2X7	15.00	19.00	2X17	40.00	44.00
2X8	17.50	21.50	2X18	42.50	46.50
2X9	20.00	24.00	2X19	45.00	49.00
2X10	22.50	26.50	2X20	47.50	51.50
2X11	25.00	29.00			

Specifications:

Material:Phosphoric copper

Applicable wire sizes:AWG#22~28#

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information

H2514AST-PQ

1 2 3

- 1:— Series No.
- 2:— ST: Straight Type Terminal
- 3:— Q: Plated Tin

