
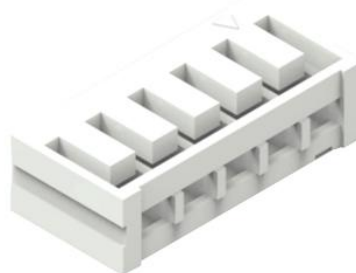


.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors



.098" (2.50mm) Pitch 90° / 180° Wafer

Specifications:

Material:

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information

H2514AR-XXP-XA
1 2 3 4 5

1:—Series No.



2:—No. of Positions

3:—R/R/A Type

4:—W:White

B:Black

5:—A:In Bag

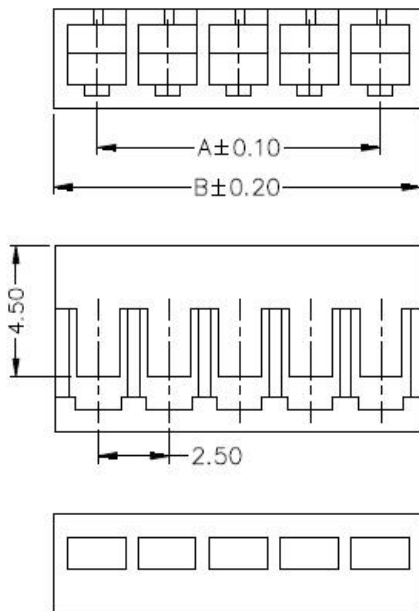

Circuits	Dimension mm	
	A	B
02	2.50	5.60
03	5.00	8.10
04	7.50	10.60
05	10.00	13.10
06	12.50	15.60
07	15.00	18.10
08	17.50	20.60
09	20.00	23.10
10	22.50	25.60
11	25.00	28.10
12	27.50	30.60

Circuits	Dimension mm	
	A	B
13	30.00	33.10
14	32.50	35.60
15	35.00	38.10
16	37.50	40.60
17	40.00	43.1
18	42.50	45.60
19	45.00	48.10
20	47.50	50.60
21	50.00	53.10
22	52.50	55.60
23	55.00	58.10

Specifications:

Material:

Insulator:PA66 UL94V-0 Color:White

Rating:

Current Rating:3.0 Amp(22AWG)


Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information



H2514AS-XXP-A
1 2 3 4

1:—Series No.

2:—S:Straight Type
Housing

3:—No. of Positions

4:—A:In Bag

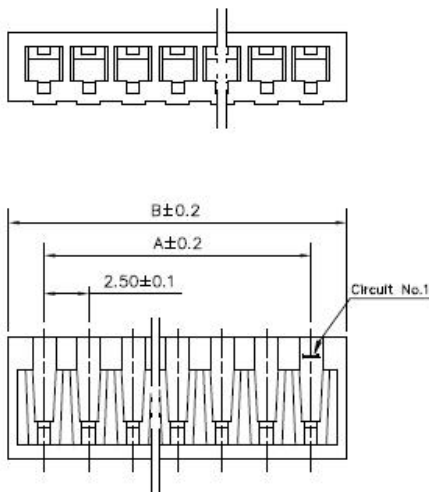

CKTS	Dimension(mm)	
	A	B
2	2.50	6.50
3	5.00	9.00
4	7.50	11.50
5	10.00	14.00
6	12.50	16.50
7	15.00	19.00
8	17.50	21.50
9	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00
16	37.50	41.50
20	47.50	51.50

.098" (2.50mm) Pitch Terminal

Note:

Material :Phosphor Bronze

Plating : Tin plated

Wire Range:AWG #22-#28

HJBRIGHT®

Ordering Information

H2514ART-PQ


1 2 3

1:—Series No.

2:—RT:R/A Type

3:—Terminal

Q: Tin Plated

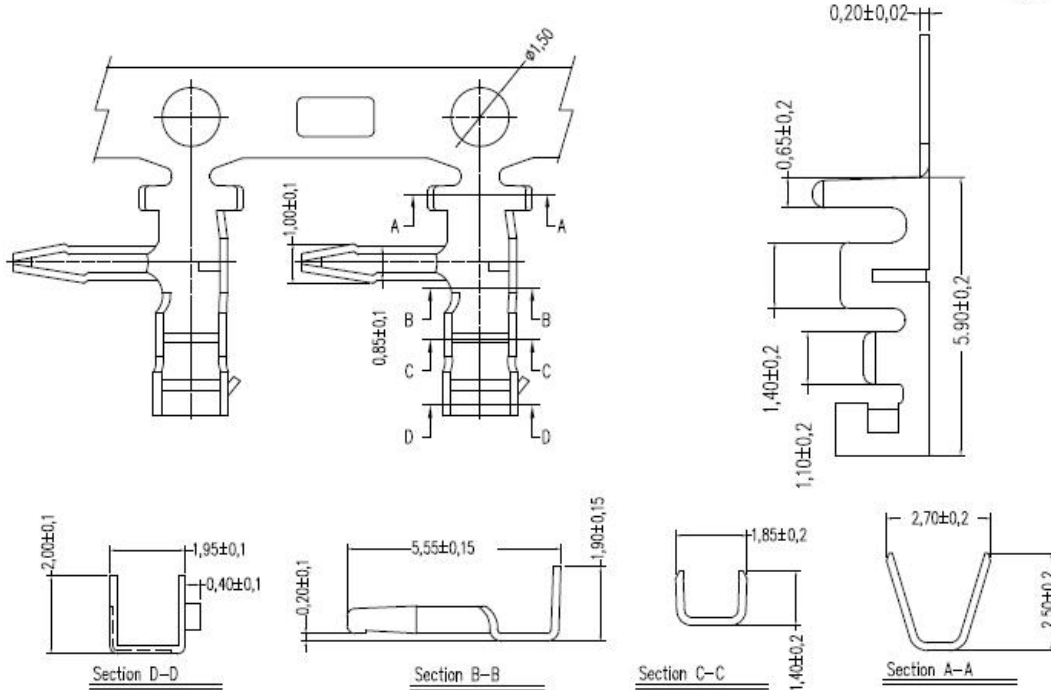

Specifications:

Material:Phosphoric copper

Applicable wire sizes:AWG#22~28#

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information

H2514AST-PQ


1 2 3

1:—Series No.

2:—ST: Straight Type

Terminal

3:—Q:Plated Tin

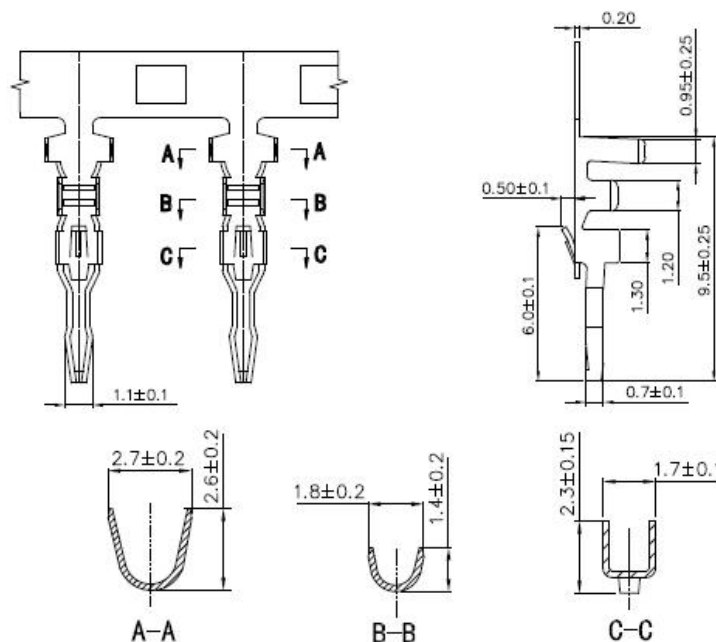

东莞市华晶电子有限公司
<http://www.hjbright.com>