

.100''(2.54mm) Pitch/Disconnectable Insulation Displacement Connectors

.100''(2.54mm) Connectors



.100" (2.54mm) Pitch 90° Wafer

Specifications:

Material And Finish:

Insulator:High Temperature Thermoplastic UL94V-0

Color:See Ordering Information

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10A

Voltage Rating:500V

Temperature Rating: -40°C~105°C

Electrical:

Contact resistance:10m Ohm Max






Insulator resistance:100M Ohm min



Ordering Information

A254001R-XXX-XX-X

- 1: — Series No.
2: — R/R/A Type
3: — No. of Positions
4: — S:Matte Tin Plated
Q: Tin Plated
5: — 01:A Type BLACK
02:B Type GREY
03:C Type BROWN
04:D Type GREEN
6: — B:In Tube
C:In Tray

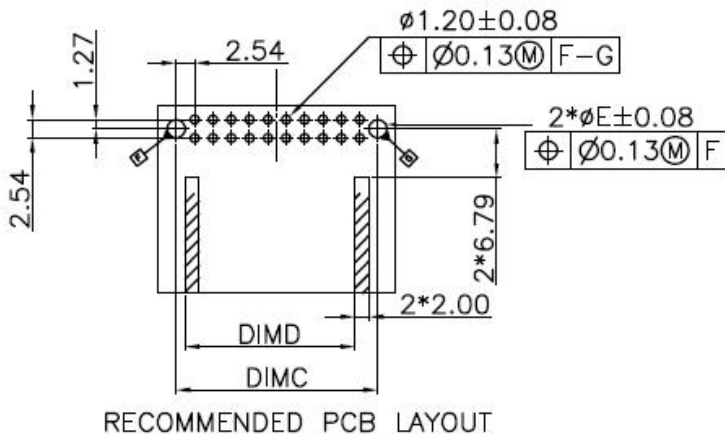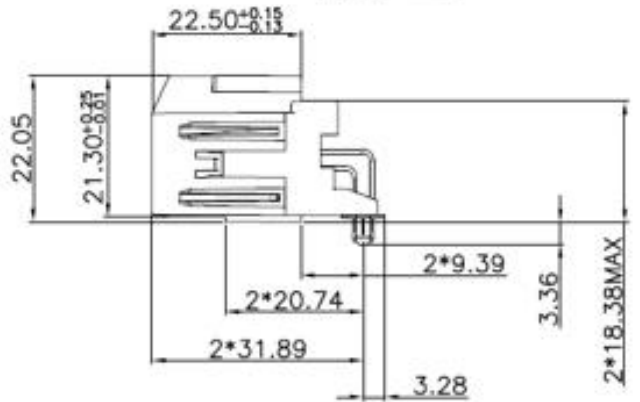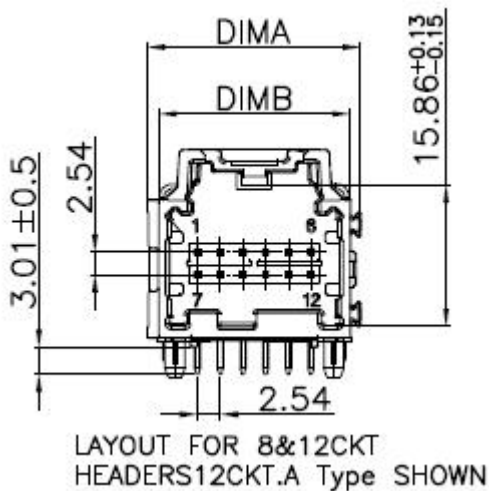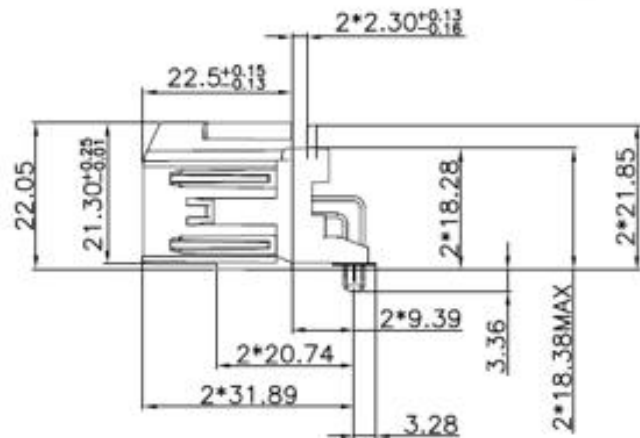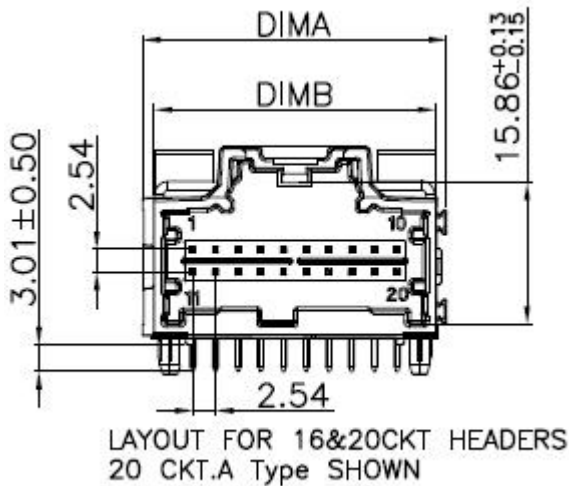

N/P	DIMA	DIMB	DIMC	DIMD
20	34.04	31.57	27.94	25.54
16	28.96	26.49	22.86	20.46
12	23.88	21.41	17.78	15.38
8	18.8	16.53	12.70	10.30