


.100''(2.54mm) Pitch/Disconnectable Insulation Displacement Connectors

.100''(2.54mm) Connectors

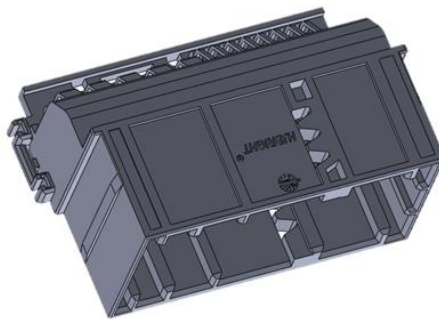

.100" (2.54mm) Pitch 90° Wafer

Specifications:

Material And Finish:

Insulator: PA46 UL94V-0

Color: See Ordering Information

Contact: Copper alloys

Plated: See Ordering Information

Rating:

Current Rating: 10 Amp (Power)

Voltage Rating: 24V DC


Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute



HJBRIGHT®

Ordering Information

A254013R-42Q-01-BC

1 2 3 4 5 6

1: — Series No.






2: — R/R/A Type

3: — No. of Positions

4: — Q: Bright Tin

5: — B: Black

6: — C: In Tray

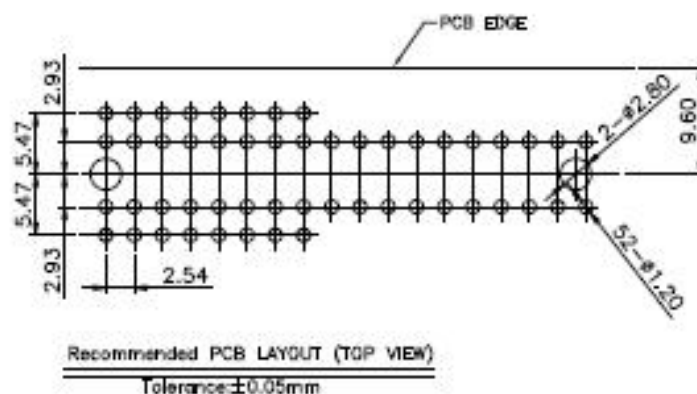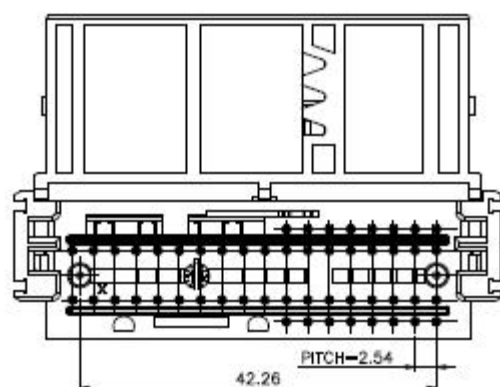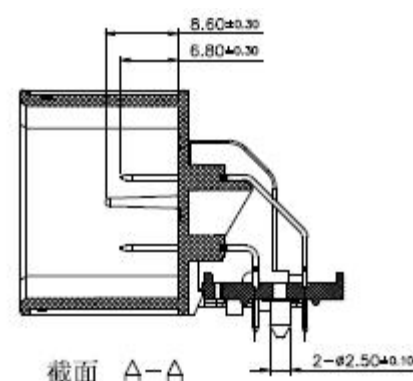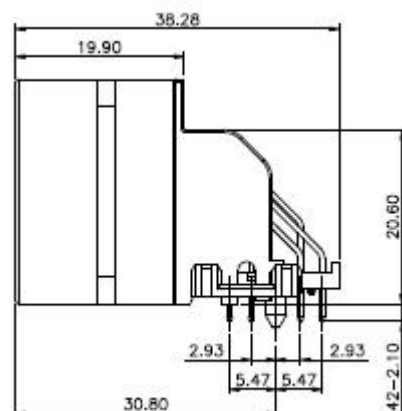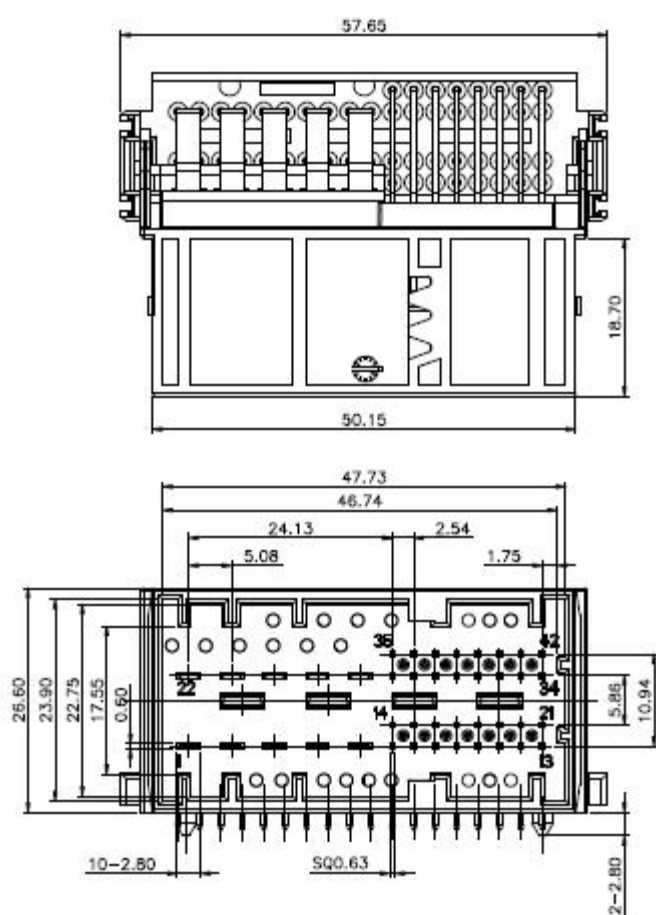

东莞市华晶电子有限公司
<http://www.hjbright.com>