

.100''(2.54mm) Pitch/Disconnectable Insulation Displacement Connectors

.100''(2.54mm) Connectors



.100" (2.54mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

TPA:PBT Color:Natural

Rating:

Voltage Current:3A(22AWG)


Voltage Rating:24V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Insulator resistance:20M ohm min.




Withstanding Voltage:1000V DC/Minute



Ordering Information

H25416M-10P-01-A

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — A:In Bag

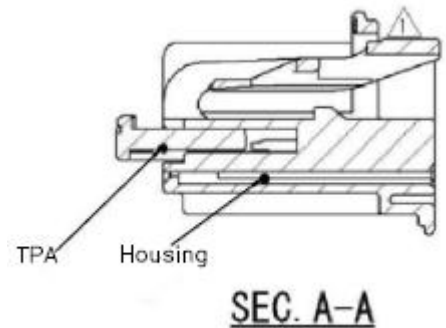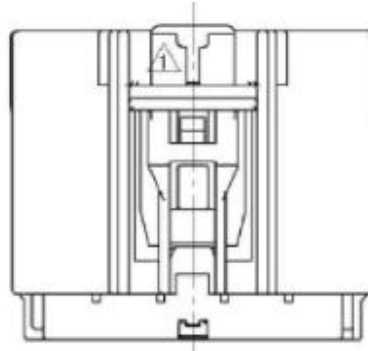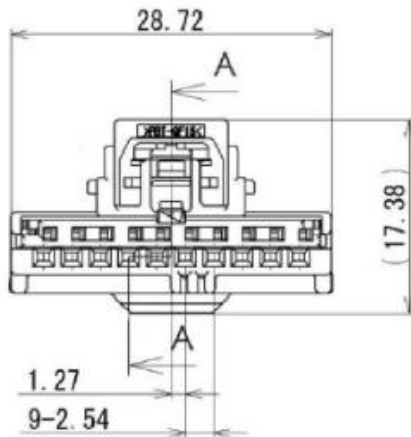

Specifications:

Material And Finish:

Contact:Copper alloy

Rating:

Current Rating:3A(22AWG)

Operating Temperature Range:-40°~+125°C

Contact resistance:20m Ohm Max

Applicable Wire:18~22AWG(0.3~0.85mm²)







Ordering Information

H25416TF-PQ-XX

1 2 3 4

- 1: — Series No.
2: — TF:Female Terminal
3: — Q: Tin Plated
4: — 01:22~20AWG
02:18AWG

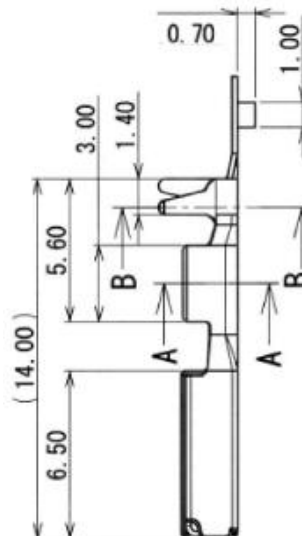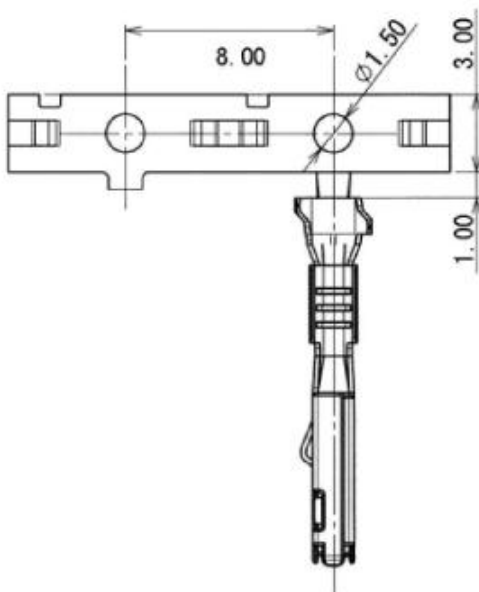

H25416TF-PQ-01	20~22AWG	ø1.20~1.90mm	1.82
H25416TF-PQ-02	18AWG	ø1.50~1.90mm	1.96
P/N	WIRE RANGE	CABLE DIAMETER	W1