

.085''(2.16mm) Pitch/Disconnectable Insulation Displacement Connectors

.085''(2.16mm) Connectors



.085" (2.16mm) Pitch Wafer

Specifications:

Material And Finish:

Insulator: PPO&Glass-Fibre Reinforced UL94V-0

Contact: Copper Alloy

Plated: See Ordering Information

Rating:

Current Rating: 5.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -55°C~+105°C

Electrical:

Contact resistance: 25m Ohm Max

Insulator resistance: 1000M ohm min.




Withstanding Voltage: 1000V AC/Minute




Ordering Information

FN2162-XXX-01-XX
1 2 3 4 5


- 1:— Series No
- 2:— No. of Positions (50P&64P)
- 3:— A: Gold Flash
I: Gold 3u"
O: Gold 5u"
R: Gold 10u"
N: Gold 15u"
F: Gold 30u"
- 4:— A: Color: Black
B: Color: Blue
- 5:— A: In Bag
B: In Tube
C: In Tray

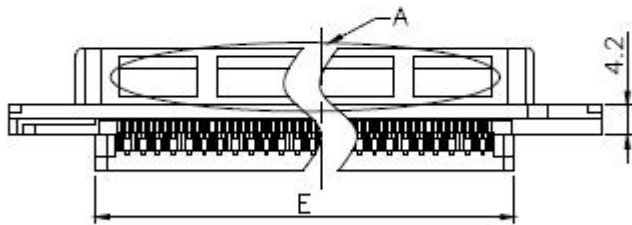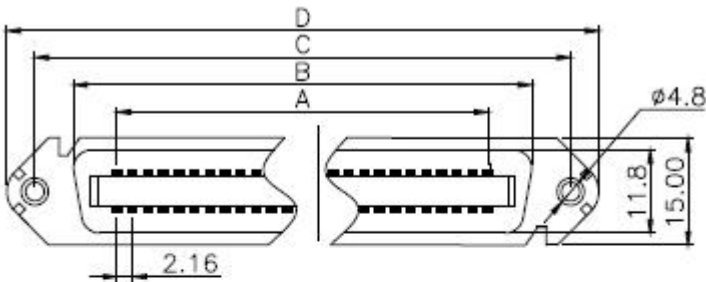

Screw



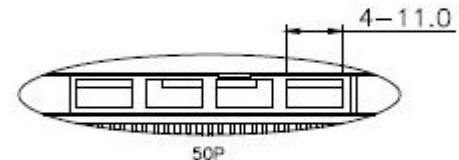


50P

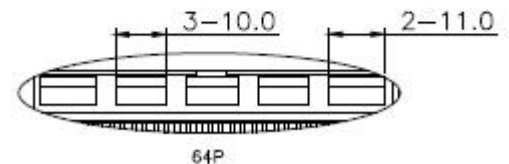

64P

VIEW A

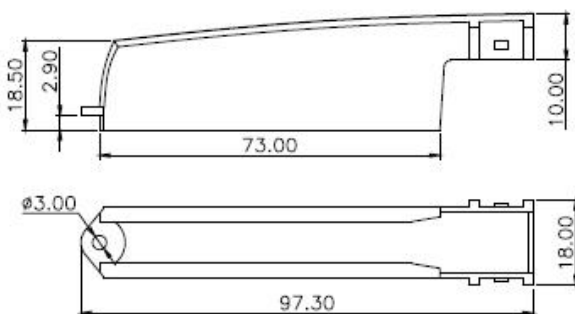

Steel

	A	B	C	D	E
50P	51.84	64.1	74.90	82.6	58.4
64P	66.96	79.2	89.95	97.7	73.5