

.138''(3.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.138''(3.50mm) Connectors



.138" (3.50mm) Pitch 90° Wafer

Specifications:

Material And Finish:

Insulator: High Temperature Thermoplastic UL94V-0

Color: See Ordering Information

Contact: Copper Alloy

Plated: See Ordering Information

Rating:

Current Rating: 1.5mm Terminal 18A

2.8mm Terminal 30A

Voltage Rating: 14VDC

Operating Temperature Range: -40°C~105°C

Electrical:

Contact resistance: 1.5mm Terminal 10m Ohm Max

2.8mm Terminal 5m Ohm Max

Insulator resistance: 20M Ohm min

Withstanding Voltage: 500V/DC




HJBRIGHT®

Ordering Information

A35007R-10X-XX-X
1 2 3 4 5

- 1: Series No.
- 2: R/R/A Type
- 3: S: Matte Tin Plated
Q: Tin Plated
- 4: 01: A Type BLACK
02: B Type GREY
03: C Type BROWN
- 5: B: In Tube
C: In Tray

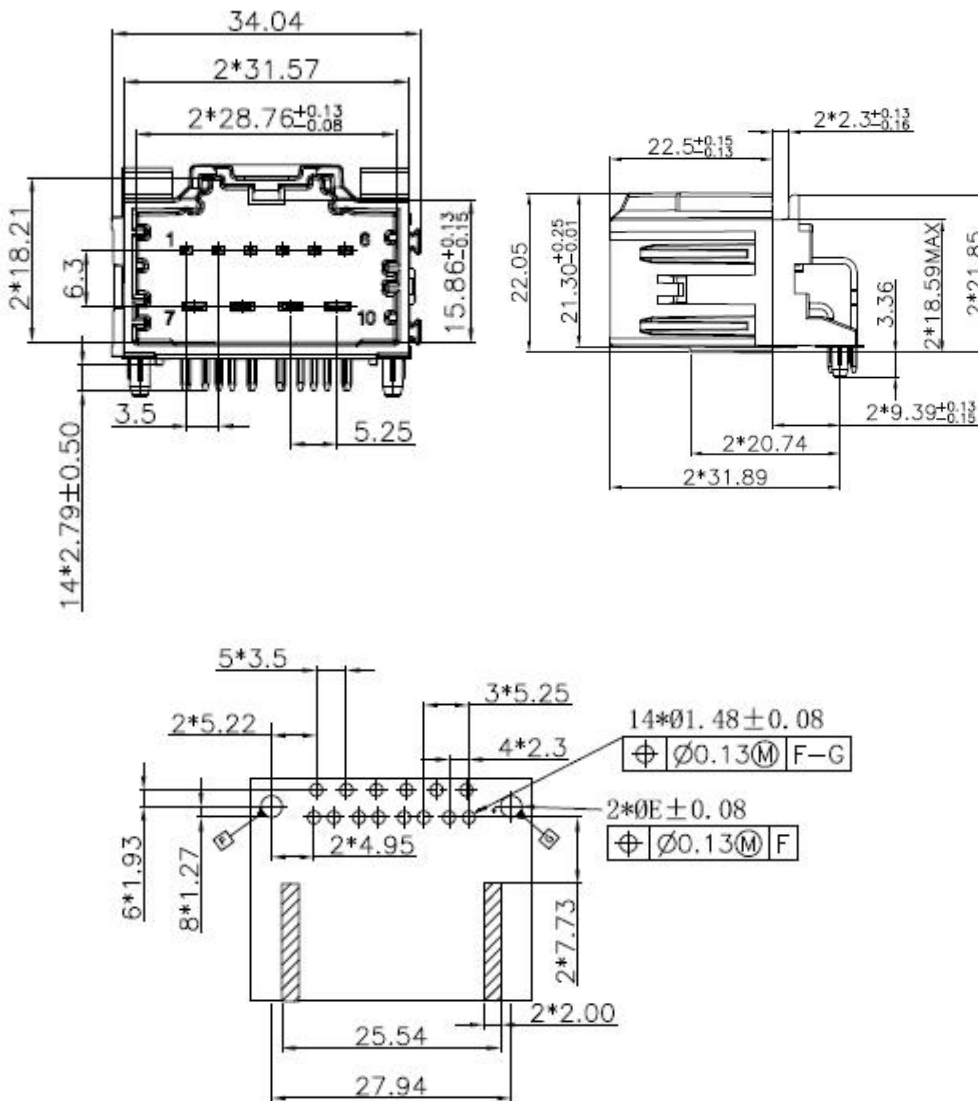

RECOMMENDED PCB LAYOUT

