

.157''(4.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.157''(4.00mm) Connectors




.157" (4.00mm) Pitch SMT Wafer

HJBRIGHT®




Specifications:

- 1.Current Rating: 3 Amp
- 2.Voltage Rating:DC 24V
- 3.Contact resistance: 30m Ohm Max
- 4.Withstanding Voltage: 500V DC
- 5.Insulation Resistance:1000MOhm min
- 6.Operation Temperature:-40°C to +105°C



Ordering Information
40013S-XXX187-NX
1 2 3 4 5

- 1:— Series No.
- 2:— S: Straight Type
- 3:— No. of Positions
- 4:— S: Matte Tin Plated
Q: Tin Plated
- 5:— C: In Tray

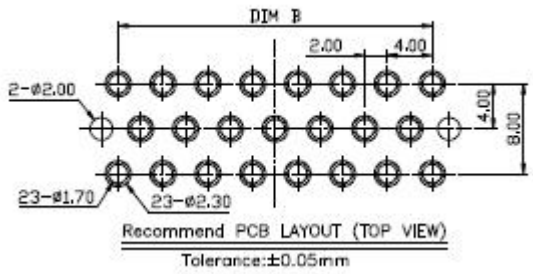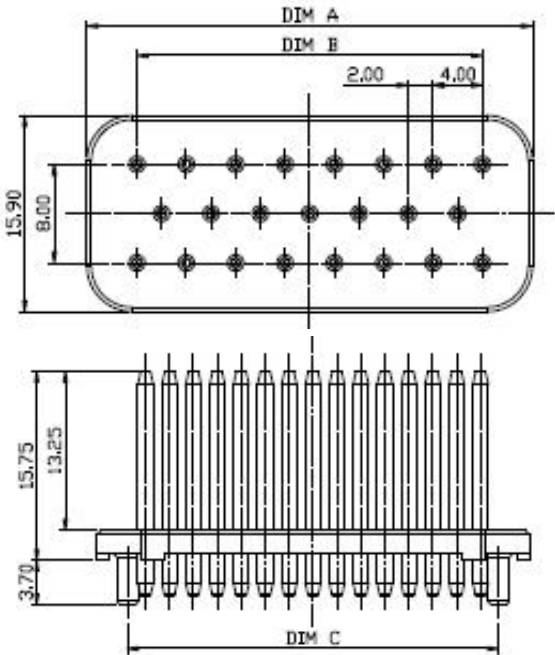

POSITIONS	DIM A	DIM B	DIM C
23	36.10	28.00	31.00
35	52.1	44.00	47.00