

.157"(4.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.157"(4.00mm) Connectors



.157" (4.00mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color:Black

Rating:

Current Rating:25 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°~+130°C

Electrical:

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute




HJBRIGHT®

Ordering Information

H4001M-02P-01-A

1 2 3 4

- 1: — Series No.
- 2: — M:Male Housing
- 3: — No. of Positions
- 4: — A:In Bag

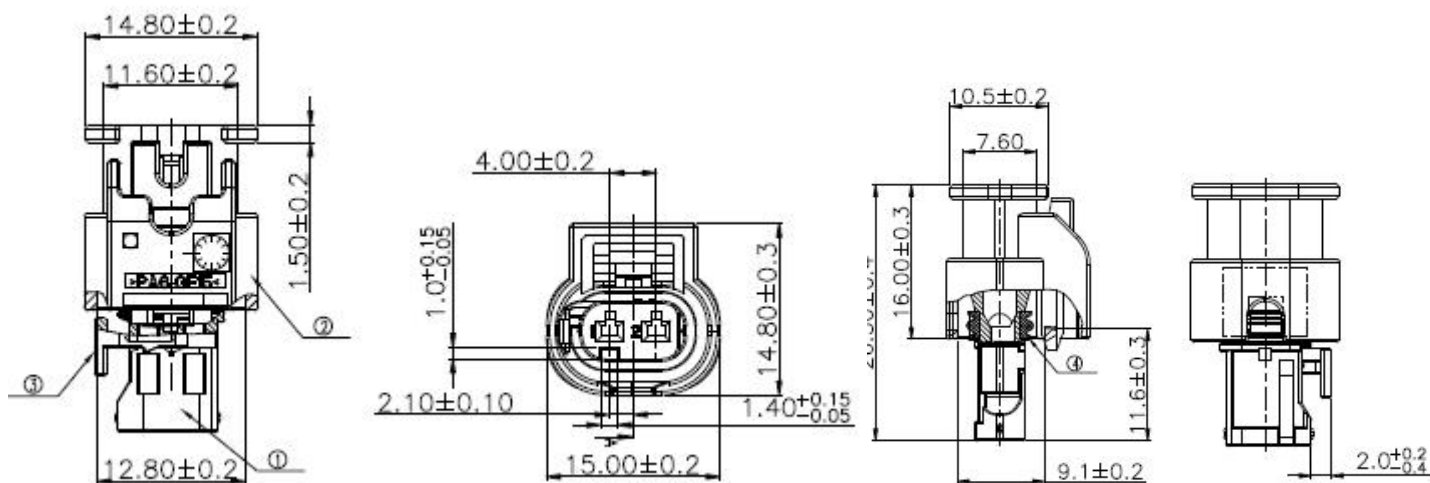

Specifications:

Material And Finish:

Insulator:Silicone Shore A 50°

Color:Yellow

Rating:

Operating Temperature Range:-40°~+130°C





Ordering Information

H4001S-01-A

1 2 3

- 1: — Series No.
- 2: — S:Silicone plug
- 3: — A:In Bag

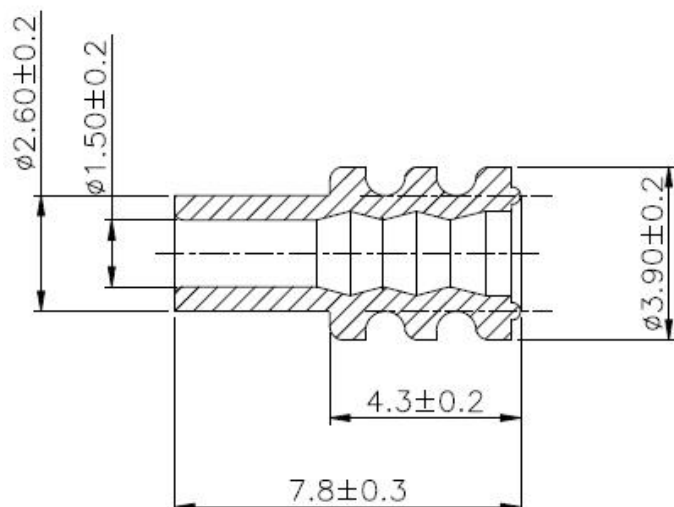

东莞市华晶电子有限公司
<http://www.hjbright.com>

HJBRIGHT®

Tab Flachstecker:CuSn0.15/0.2

Rating:

Current Rating: 10 Amp

Temperature Range: -40°C~+130°C

Wire Range:0.25mm²~0.35mm²



Ordering Information

H4001TM-PX-02-A

1	2	3
---	---	---



1:—Series No.

1:—TM:Male Terminal

2:— Q: Tin Plated

AG:80u"Silver plated

A2:30u"Gold on contact;Tin on tail

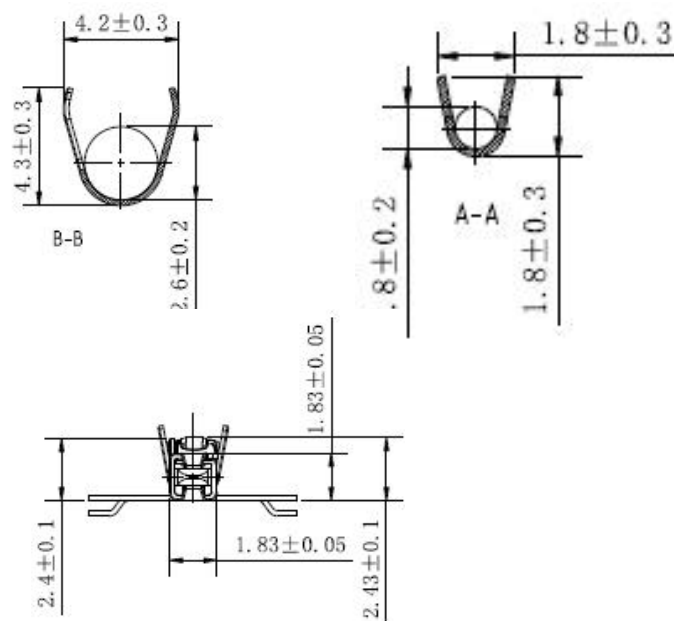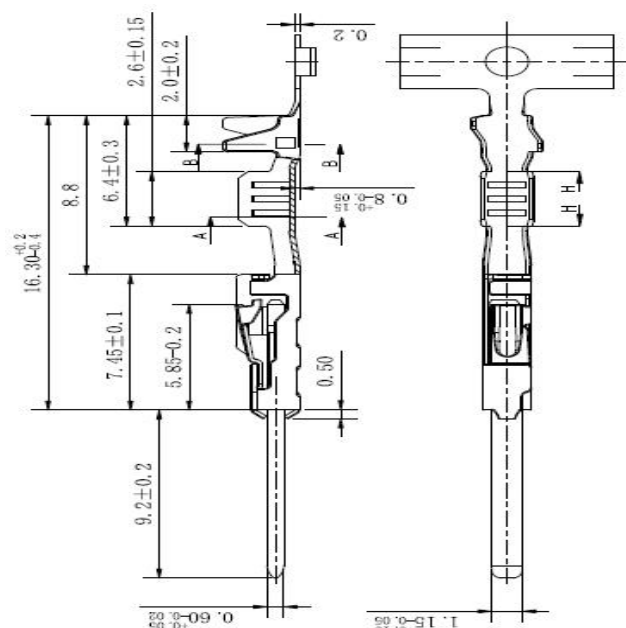

Material:

Terminal: Copper alloy

Rating:

Current Rating: 25 Amp

Temperature Range: $-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$

Wire Range:0.13mm²~1.5mm²



Ordering Information

H4001TF-PX-XX-A

1	2	3	4
---	---	---	---

1:—Series No.

2:—T:Female Terminal

3:—Q: Tin Plated

AG:Silver plated

A2:30u"Gold on contact;Tin on tail

4:—01:0.13mm²~0.22mm²

02:0.25mm²~0.35mm²

03:0.50mm²~0.75mm²

04:1.0mm²~1.50mm²

