


.157"(4.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.157"(4.00mm) Connectors

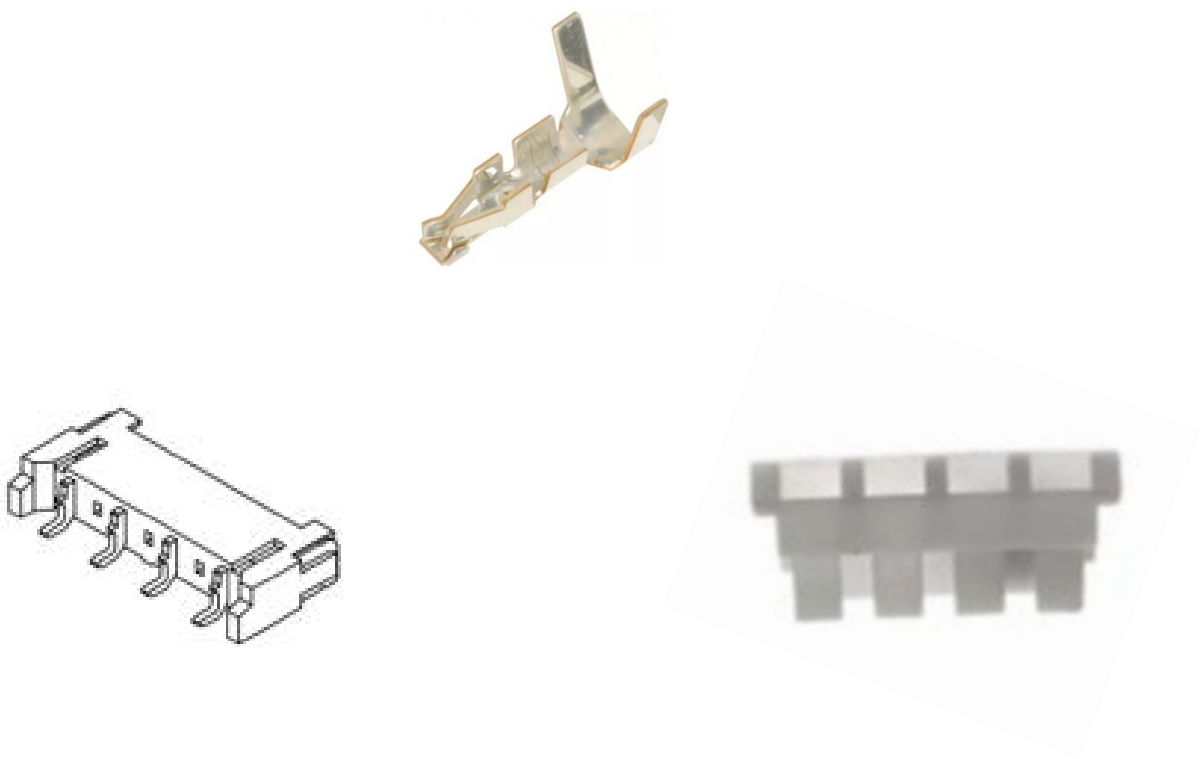

.157" (4.00mm) Pitch SMT Wafer / Housing

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max



Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

Ordering Information

A4002H-XXX-01-G
1 2 3 4 5 6

- 1:—Series No.
2:—H:Horizontal SMT Type
3:—No. of Positions
4:—A:Gold Flash
Q:Tin Plated
5:—G:Tape&Reel

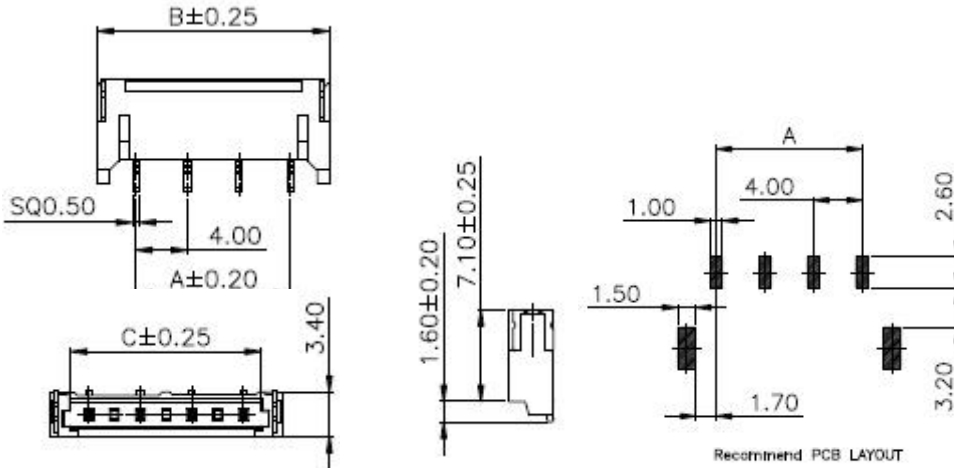

No.	DIM		
	A	B	C
02P	4.00	10.00	6.50
03P	8.00	14.00	10.50
04P	12.00	18.00	14.50
05P	16.00	22.00	18.50

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Rating:

Current Rating:1.0 Amp

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max



Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

Ordering Information

H4002-XXP-A
1 2 3

- 1:—Series No.
2:—No. of Positions
3:—A:In Bag

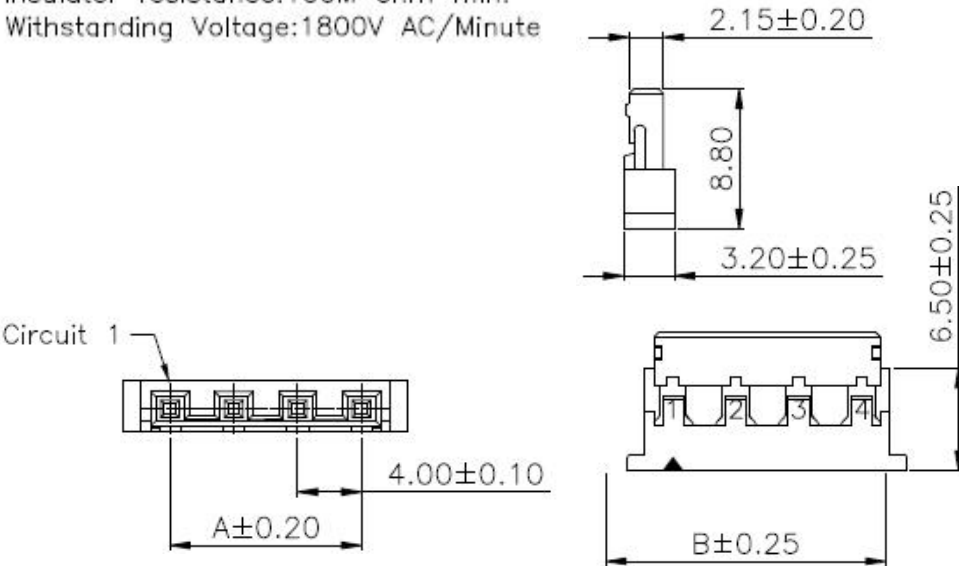

No.	DIM	
	A	B
02P	4.00	9.80
03P	8.00	13.80
04P	12.00	17.80
05P	16.00	21.80

.157" (4.00mm) Pitch Terminal

Specifications:

Material And Finish:

Terminal: Phosphor Bronze

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 600V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max

Withstanding Voltage: 1800V AC/Minute

Wire Range: AWG#22~28AWG

Insulation O.D.: 1.60mm Max



HJBRIGHT®

Ordering Information

H4002T-PX-01



1 2 3

1: — Series No.


2: — T: Terminal

3: — A: Gold Flash

Q: Tin Plated

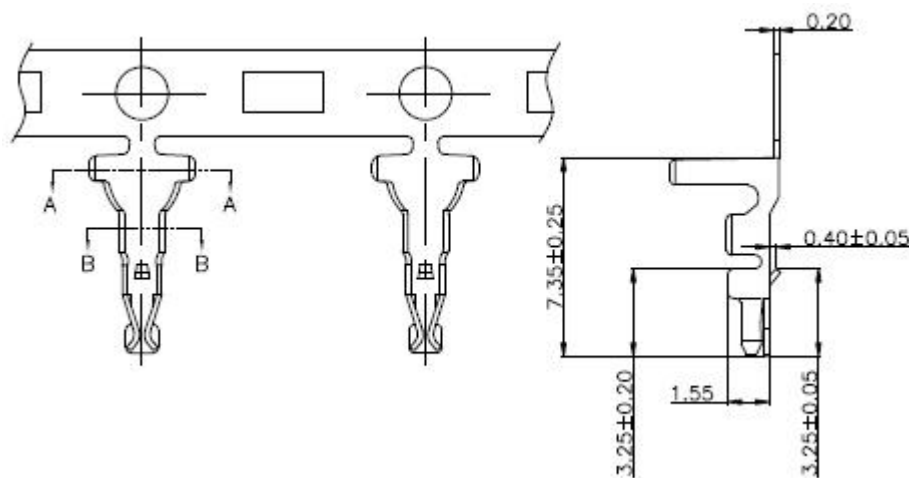

SEC: A-A



SEC: B-B