

.157"(4.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.157"(4.00mm) Connectors



.157" (4.00mm) Pitch 90° Wafer / Housing

Specifications:

Material And Finish:

Insulator: PBT UL94V-0

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 5.0 Amp (20AWG)

Voltage Rating: 250V AC/DC




Operating Temperature Range: -40°~+120°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC/Minute

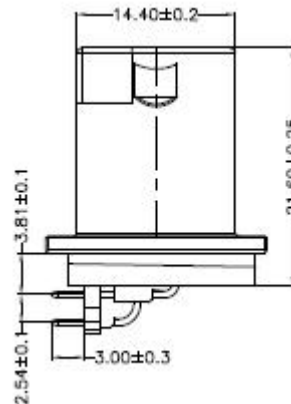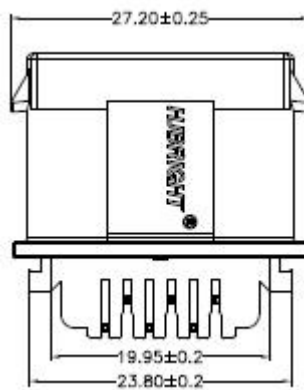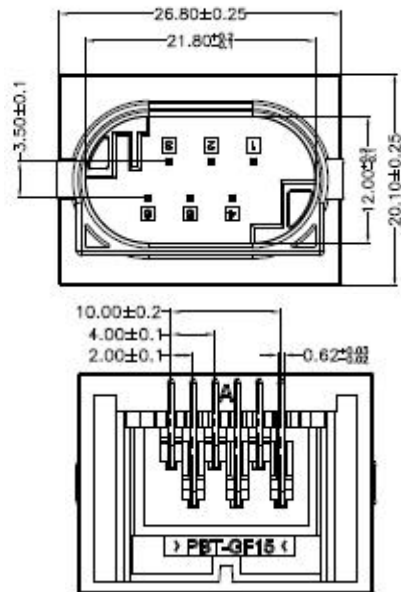

Ordering Information

A40350R-06S-01-X
1 2 3 4 5

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—A:Gold Flash

S:Matte Tin Plated

Y:30u" Gold on contact;


Matte Tin on tail

5:—C:In Tray

B:In Tube

G:W/O CAP In

Tape&Reel



PCB Layout

Specifications:

Material And Finish:

Insulator: PBT UL94V-0 Color: Black

Plated: See Ordering Information

Rating:

Current Rating: 5 Amp (Single pin) 20AWG

Voltage Rating: 50V AC/DC





Operating Temperature Range: -40°~+120°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC/Minute

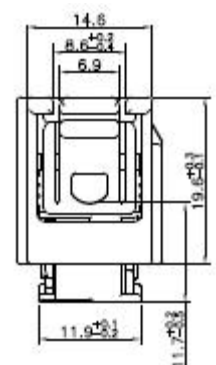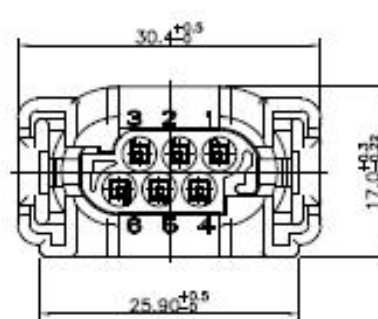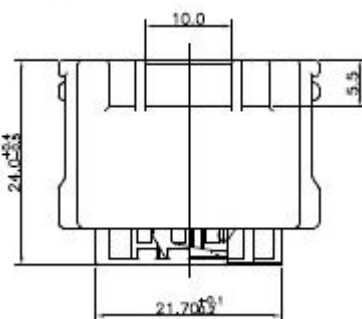

Ordering Information

H40350-06P-XX-A
1 2 3 4

1:—Series No.

2:—No. of Positions

3:—01:A Type

02:B Type

03:C Type

V3A:A Type Empty 3P

4:—A:In Bag



A Type	A Type V3A	B Type	C Type
	Empty 3P: 2P, 3P, 6P 		

.157" (4.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator: PBT UL94V-0 Color: Natural

Plated: See Ordering Information

Rating:

Current Rating: 5 Amp (Single pin) 20AWG

Voltage Rating: 50V AC/DC




Operating Temperature Range: -40°~+120°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC/Minute

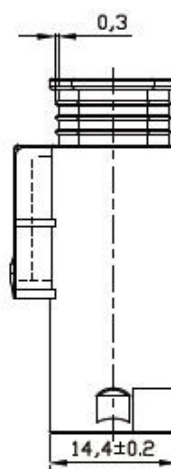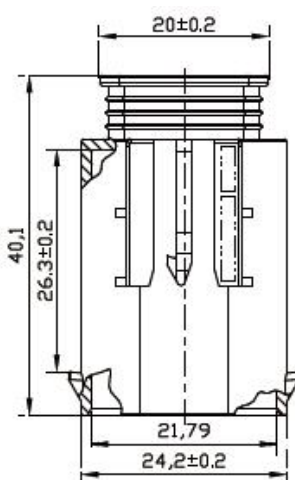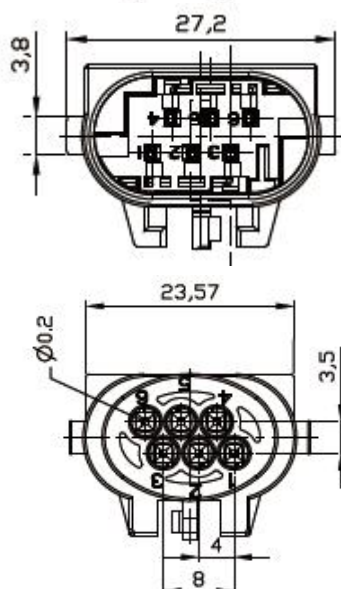


HJBRIGHT®

Ordering Information

H40350-XXP-XXX
1 2 3 4

- 1:— Series No.
- 2:— No. of Positions
- 3:— 01: A Type
02: B Type
- 4:— A: In Bag
C: In Tray

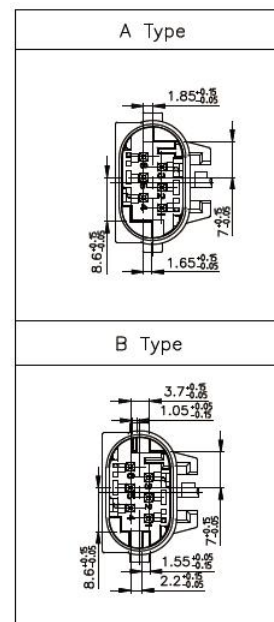

Specifications:

Material And Finish:

Material: Copper alloy


Wire Rang: 0.35mm² (22AWG)




Ordering Information

H25082TF-PQ
1 23 4

- 1:— Series No.
- 2:— Terminal
- 3:— F: Female Terminal
- 4:— Q: Tin Plated





A-A



B-B



Laser welding

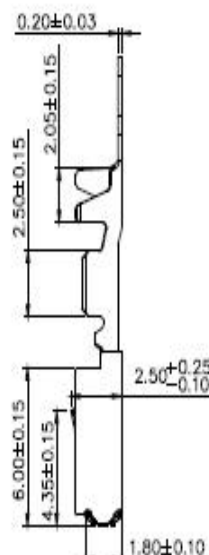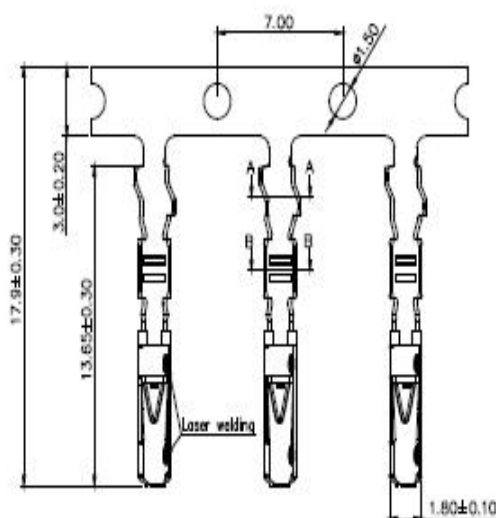

东莞市华晶电子有限公司
<http://www.hjbright.com>

.157" (4.00mm) Pitch Terminal

Specifications:

Material And Finish:

Material: Copper alloy

Wire Rang: 0.35mm²(22AWG)

Ordering Information

H25083TM-PQ

1 23 4

1:—Series No.

2:—Terminal

3:—M: Male Terminal

4:—Q: Tin Plated

