

.162"(4.14mm) Pitch/Disconnectable Insulation Displacement Connectors

.162"(4.14mm) Connectors



Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:White

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:9.0 Amp

Voltage Rating:500V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A4141R-02X-01-X

1 2 3 4 5

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—Q:Tin Plated

S:Matte Tin Plated



Y:30u" Gold on contact;

Matte Tin on tail

5:—A:In Bag

B:In Tube

C:In Tray

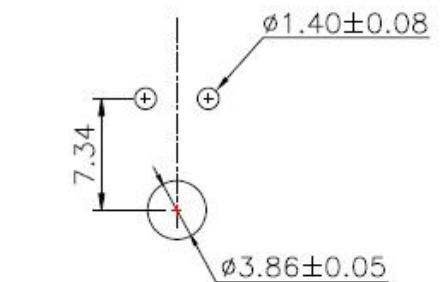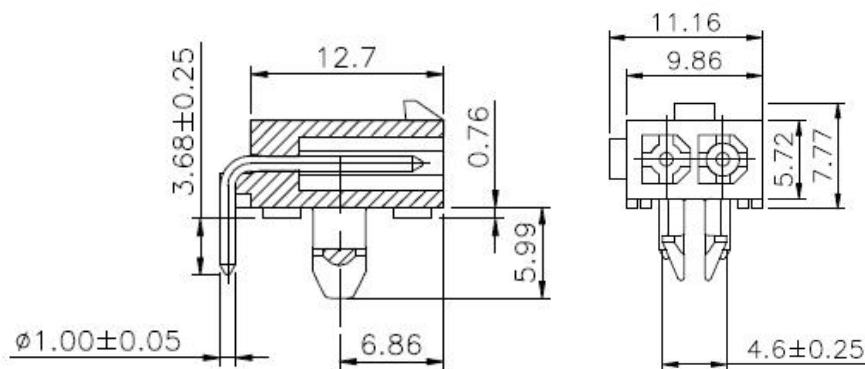

Recommended PCB Layout

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:White

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:9.0 Amp

Voltage Rating:500V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A4141S-02X-02-X

1 2 3 4 5

1:—Series No.

2:—S:Straight Type

3:—No. of Positions

4:—A:Gold Flash

Q:Tin Plated.

S:Matte Tin Plated



Y:30u" Gold on contact;

Matte TIN on Tail

5:—A:In Bag

B:In Tube

C:In Tray

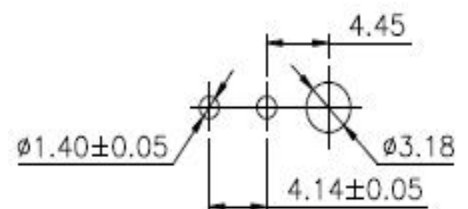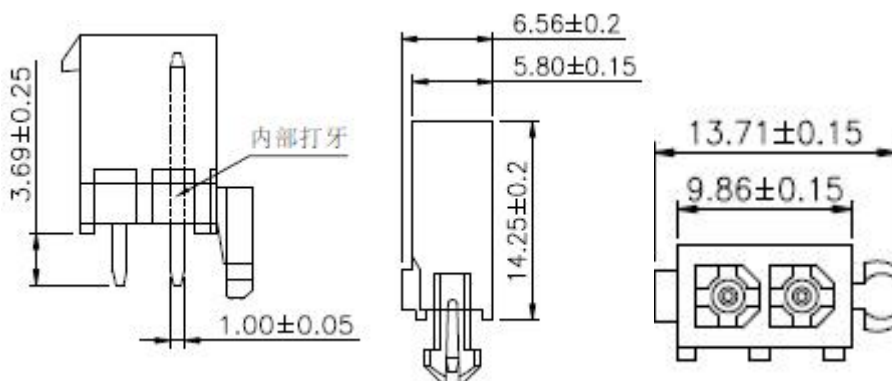

Recommended PCB Layout