

.165"(4.20mm) Pitch/Disconnectable Insulation Displacement Connectors

.165"(4.20mm) Connectors



.165" (4.20mm) Pitch Wafer

Specifications:

Material And Finish:

Insulator: Nylon66 UL94V-0 Color: Natural

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 13Amp Max (16AWG Per Pin)

Voltage Rating: 600V AC/DC




Operating Temperature Range: -40°~+105°C

Electrical:


Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute

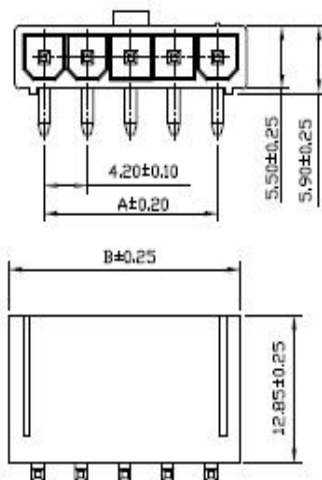

Part No.	Dimensions(mm)	
	A	B
2P	4.20	9.80
3P	8.40	14.00
4P	12.60	18.20
5P	16.80	22.40
6P	21.00	26.60



Ordering Information

A42011R-XXX-01-A

1 2 3 4 5

1:— Series No.

2:—R:R/A Type

3:—No. of Positions

4:—A:Gold Flash

Q: Tin Plated

5:—A: In Bag

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-2 Color: Natural

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 7.0 Amp (16AWG)

Voltage Rating: 600V AC/DC



Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute

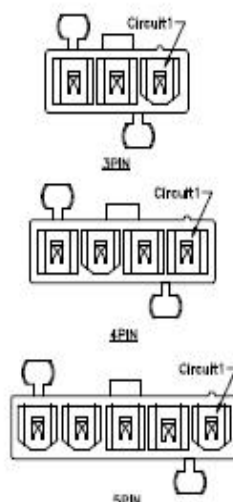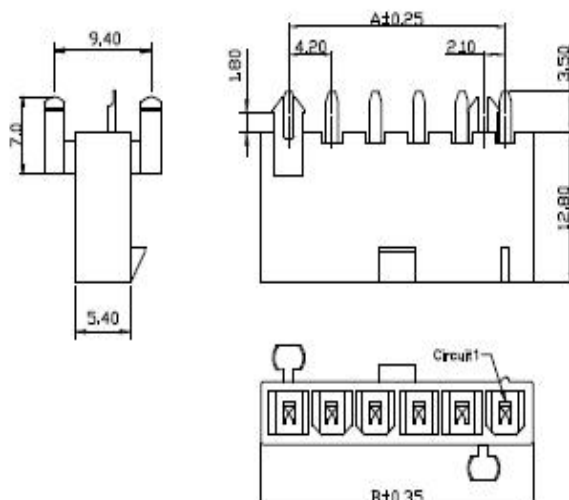

Ordering Information

A42011S-XXX-02-X

1 2 3 4 5

1:— Series No.

2:—S: Straight Type

3:—No. of Positions


4:—A:Gold Flash

Q: Tin Plated

5:—A: In Bag

B: In Tube

C: In Tray

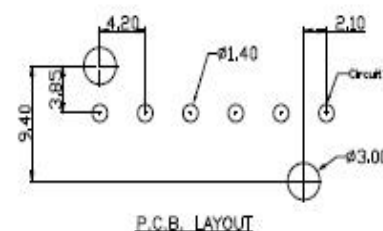

.165" (4.20mm) Pitch Housing

Specifications:

Material And Finish:

Insulator: Nylon66 UL94V-0 Color: Natural

Plated: See Ordering Information

Rating:

Current Rating: 13Amp Max (16AWG Per Pin)

Voltage Rating: 600V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.




Withstanding Voltage: 1500V AC/Minute



HJBRIGHT®

Ordering Information
H42011-XXP-01-XXA

- 1:— Series No.
2:— No. of Positions
3:— 01: A Type
02: B Type
4:— A: In Bag

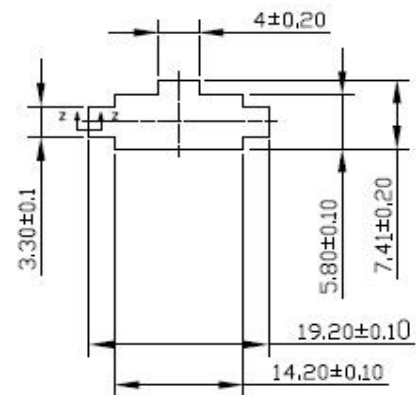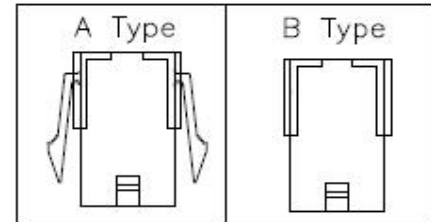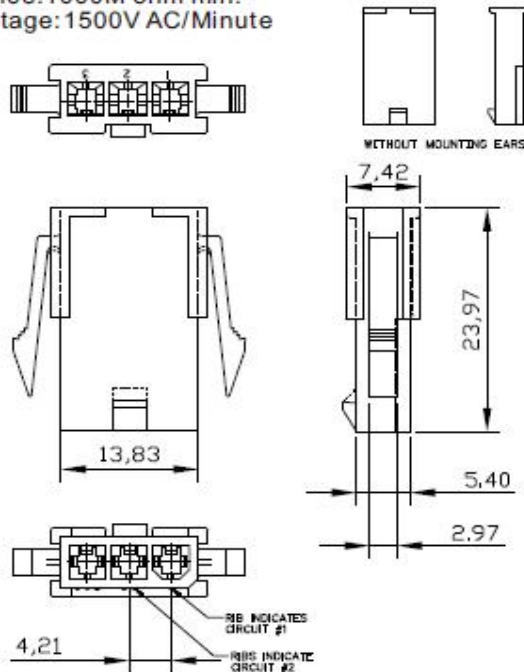

Specifications:

Terminal: Copper Alloy




Plated: see ordering information

Wire Range: AWG#16~20




Ordering Information
H42012TM-PX

- 1:— Series No.
2:— Terminal
3:— M: Male Terminal
4:— A: Gold flash
Q: Tin plated

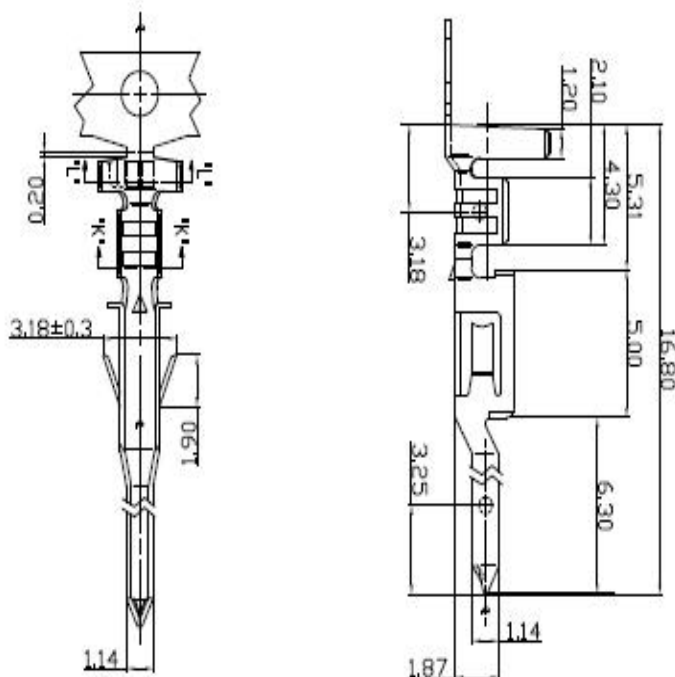

SECT. 'K-K'



SECT. 'L-L'

东莞市华晶电子有限公司
<http://www.hjbright.com>