

.224"(5.70mm) Pitch/Disconnectable Insulation Displacement Connectors

.224"(5.70mm) Connectors



224" (5.70mm) Pitch 90° /180° Wafer

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Material:High contactivity copper alloy

Plated:See Ordering Information

Rating:

Current Rating:23Amp AC,DC(12AWG/Per pin)

Voltage Rating:600V AC,DC

Temperature Range:-40°C~+105°C

Electrical:

Contact Resistance:10m Ohm Max

Insulator Resistance:1000M ohm min.

Withstanding Voltage:2200V AC/Minute

HJBRIGHT®

Ordering Information

A5701R-XXS-01-X

1 2 3 4 5

1:— Series No.

2:— R:R/A Type






3:— No. of Positions

4:— S:Matte Tin Plated


5:— A:In Bag

B:In Tube

C:In Tray



Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02P	5.70	12.05	5.70	07P	34.20	40.55	34.20
03P	11.40	17.75	11.40	08P	39.90	46.25	39.90
04P	17.10	23.45	17.10	09P	45.60	51.95	45.60
05P	22.80	29.15	22.80	10P	51.30	57.65	51.30
06P	28.50	34.85	28.50	11P	57.00	63.35	57.00
07P	34.20	40.55	34.20	12P	62.70	69.05	62.70

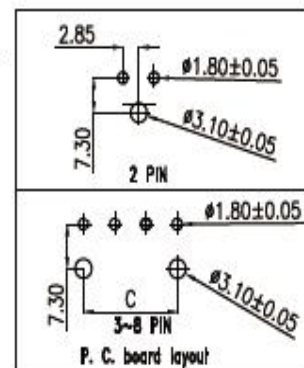

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Brass High contactivity copper alloy

Plated:See Ordering Information

Rating:

Current Rating:23Amp AC/DC(12AWG/ Per pin)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2200V AC/Minute



Ordering Information

A5701S-XXS-01-X

1 2 3 4 5

1:— Series No.

2:— S:Straight Type




3:— No. of Positions

4:— S:Matte Tin Plated


5:— A:In Bag

B:In Tube

C:In Tray

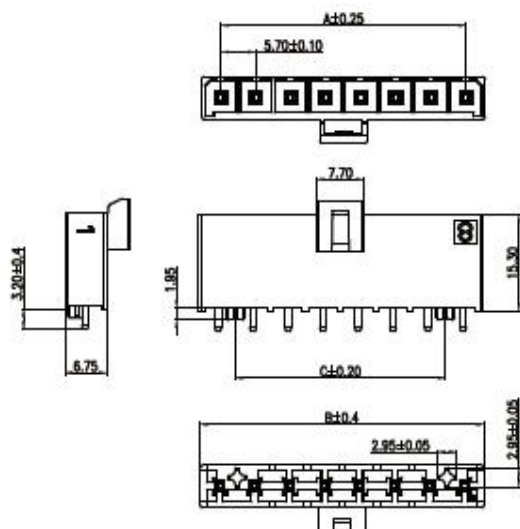

Poles	Dimensions (mm)		
	A	B	C
02P	5.70	12.05	
03P	11.40	17.75	5.70
04P	17.10	23.45	11.40
05P	22.80	29.15	17.10
06P	28.50	34.85	22.80
07P	34.20	40.55	28.50
08P	39.90	46.25	34.20

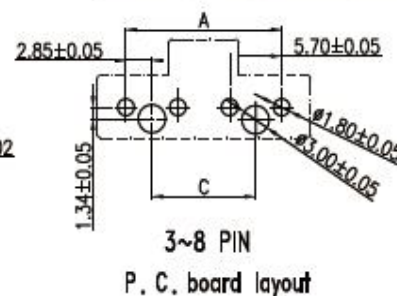

东莞市华晶电子有限公司
http://www.hjbright.com

224" (5.70mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Black

Rating:

Current Rating:23Amp AC/DC(12AWG/Per pin)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2200VAC/Minute

HJBRIGHT®

Ordering Information

H5701-XXP-A
1 2 3



1:— Series No.

2:— No. of Positions

3:— A:In bag



Part No.	Dimension (mm)	
	A	B
02P	5.70	12.05
03P	11.40	17.75
04P	17.10	23.45
05P	22.80	29.15
06P	28.50	34.85
07P	34.20	40.55
08P	39.90	46.25

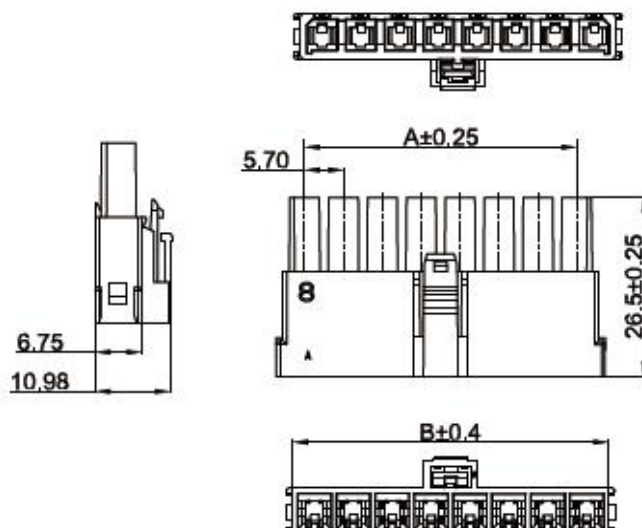

Specifications:

Material And Finish:

Material:High contactivity copper alloy

Rating:

Current Rating:23Amp AC,DC(12AWG/per pin)

Voltage Rating:600V AC,DC

Temperature Range:-40°C~+105°C

Electrical:

Contact Resistance:10m Ohm Max

Ordering Information

H5701T-XXQ
1 2 3 4



1:— Series No.

2:— T:Terminal


3:— P1:12AWG

P2:14-16AWG

4:— Q: Tin Plated

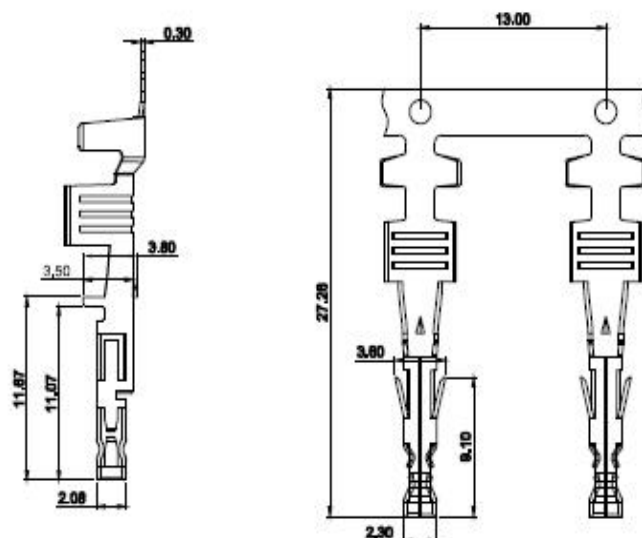


SECTION K-K




SECTION L-L

P1: CONDUCTOR AND INSULATION 12AWG



SECTION H-H



SECTION J-J

P2: CONDUCTOR AND INSULATION 14~16AWG

东莞市华晶电子有限公司
<http://www.hjbright.com>