

.240''(6.10mm) Pitch/Disconnectable Insulation Displacement Connectors

.240''(6.10mm) Connectors



224" (5.70mm) Pitch 90° /180° Wafer

Specifications:

Material And Finish

Insulator: Nylon66, UL94V-V0

Plated: See Ordering Information

Rating:

Current Rating: 10AAC, DC

Voltage Rating: 600V AC/DC

Operating Temperature Range: -25°~+85°C

Electrical:

Contact resistance: 3.5m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 5000V AC/Minute

HJBRIGHT®



Ordering Information


H6100-02-G-A
1 2 3 4

1:— Series No.

2:— No. of Positions

3:— G: Green

4:— A: In bag

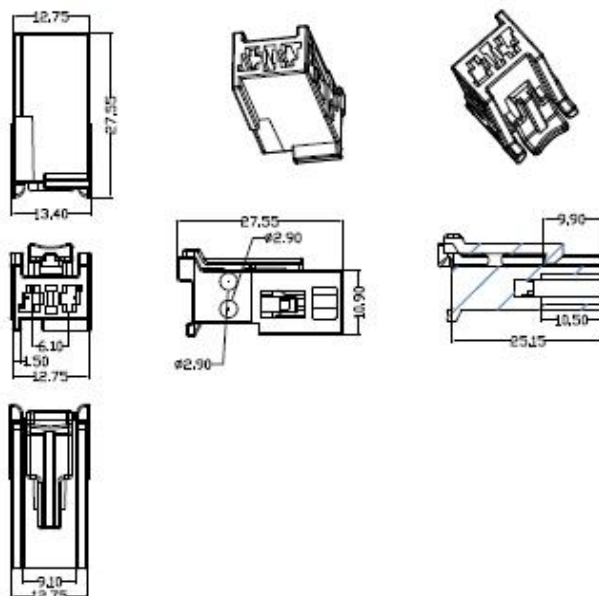

General tolerance

Basic dimensions(mm)	Tol Value(mm)
0~3	0.16
3~6	0.18
6~10	0.20
10~14	0.22
14~18	0.24
18~24	0.28
24~30	0.32
30~40	0.36
40~50	0.40
50~65	0.46
65~80	0.52
>80	0.60



Note:

Material : Brass T=0.30mm

Plating : Ni plated 30~50u"

overall 80~120u" Sn

Wire Range: AWG #16-#20

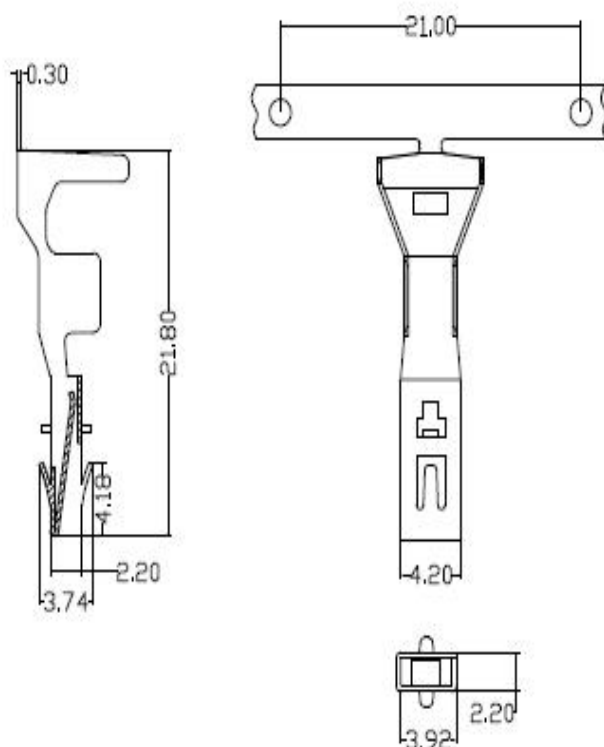

Ordering Information


H6100T-PX
1 2 3

1:— Series No.

2:— Terminal

3:— Q: Tin Plated

S: Matte Tin Plated



Unmarked dimensional tolerance table

Size range	Dimensional tolerance
0.5~3	±0.20
≥3~6	±0.30
≥6~30	±0.40
≥30~120	±0.50

东莞市华晶电子有限公司
<http://www.hjbright.com>