

.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch SMT Wafer

Specifications:
Material And Finish:
Insulator:PA9T UL94V-0
Contact:Brass

Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+125°C



Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute



HJBRIGHT®

Ordering Information
A2019M-XXS-01-XG
1 2 3 4 5 6

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — S:Matte Tin Plated
- 5: — Color:
N=Natural
B=Black
- 6: — G:In Tape&reel

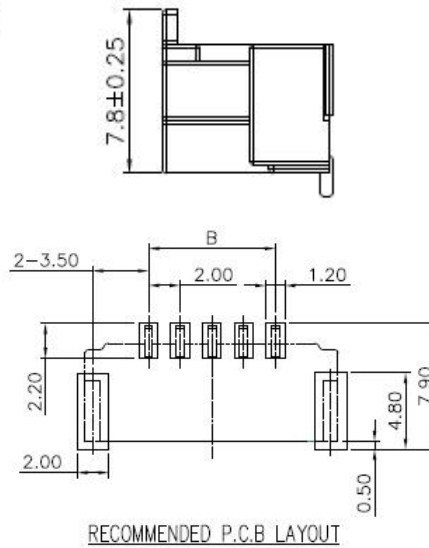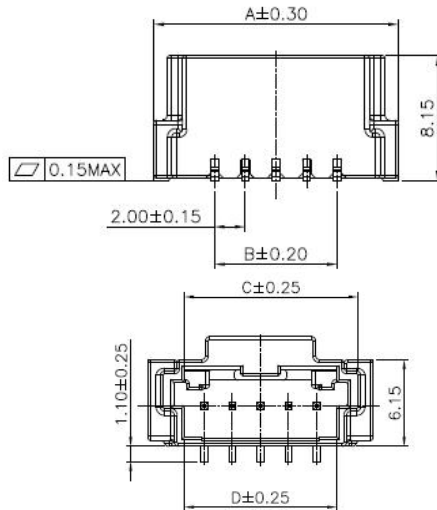

Circuits	A	B	C	D
2	9.90	2.00	6.30	4.80
3	11.90	4.00	8.30	6.80
4	13.90	6.00	10.30	8.80
5	15.90	8.00	12.30	10.80
6	17.90	10.00	14.30	12.80
7	19.90	12.00	16.30	14.80
8	21.90	14.00	18.30	16.80
9	23.90	16.00	20.30	18.80
10	25.90	18.00	22.30	20.80
11	27.90	20.00	24.30	22.80
12	29.90	22.00	26.30	24.80
13	31.90	24.00	28.30	26.80
14	33.90	26.00	30.30	28.80
15	35.90	28.00	32.30	30.80
16	37.90	30.00	34.30	32.80

Specifications:
Material And Finish:
Insulator:PA9T UL94V-0
Contact:Brass



Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute



Ordering Information
A2019H-XXS-01-XG
1 2 3 4 5 6

- 1: — Series No.
- 2: — H:Horizontal SMT Type
- 3: — No. of Positions
- 4: — S:Matte Tin Plated
- 5: — Color:
N=Natural
B=Black
- 6: — G:In Tape&reel

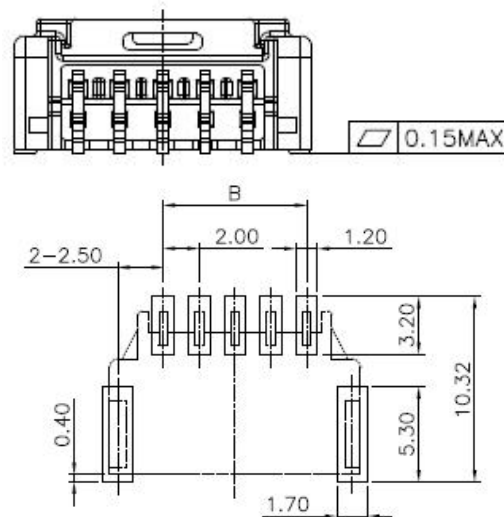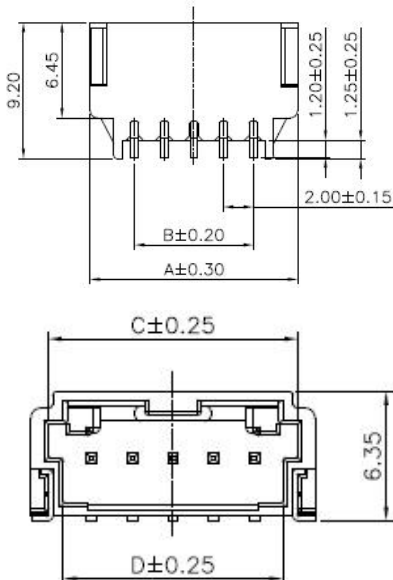

Circuits	A	B	C	D
2	8.00	2.00	6.30	4.80
3	10.00	4.00	8.30	6.80
4	12.00	6.00	10.30	8.80
5	14.00	8.00	12.30	10.80
6	16.00	10.00	14.30	12.80
7	18.00	12.00	16.30	14.80
8	20.00	14.00	18.30	16.80
9	22.00	16.00	20.30	18.80
10	24.00	18.00	22.30	20.80
11	26.00	20.00	24.30	22.80
12	28.00	22.00	26.30	24.80
13	30.00	24.00	28.30	26.80
14	32.00	26.00	30.30	28.80
15	34.00	28.00	32.30	30.80
16	36.00	30.00	34.30	32.80

东莞市华晶电子有限公司
<http://www.hjbright.com>

.079" (2.00mm) Pitch Housing

HJBRIGHT®

Specifications:
Material And Finish:
Insulator:PBT UL94V-0






Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Temperature Range:-40°C~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage: 0V AC/Minute



Ordering Information
H2019-XXP-XA
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — Color:
N:Natural
B:Black
4: — A:In Bag

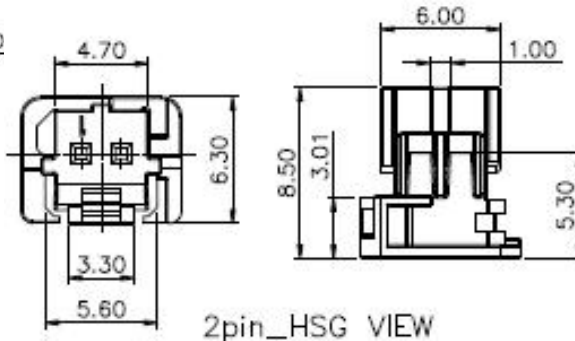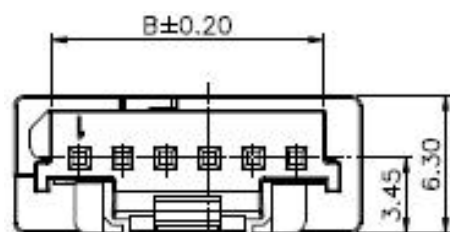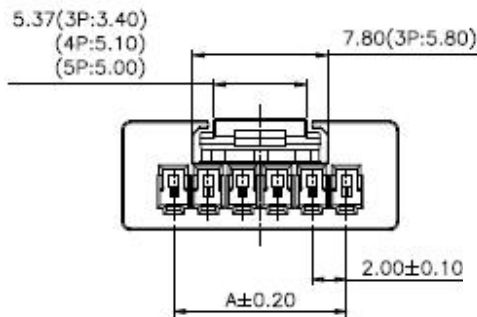

Circuits	A	B	C	D
2	2.00	4.70	6.10	8.00
3	4.00	6.70	8.10	10.00
4	6.00	8.70	10.10	12.00
5	8.00	10.70	12.10	14.00
6	10.00	12.70	14.10	16.00
7	12.00	14.70	16.10	18.00
8	14.00	16.70	18.10	20.00
9	16.00	18.70	20.10	22.00
10	18.00	20.70	22.10	24.00
11	20.00	22.70	24.10	26.00
12	22.00	24.70	26.10	28.00
13	24.00	26.70	28.10	30.00
14	26.00	28.70	30.10	32.00
15	28.00	30.70	32.10	34.00
16	30.00	32.70	34.10	36.00

Specifications:
Material And Finish:
Insulator:PBT UL94V-0 Color:Black





Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Temperature Range:-40°C~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage: 0V AC/Minute



Ordering Information
H2019-XXP-KA
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — K:Snap-fit
4: — A:In Bag

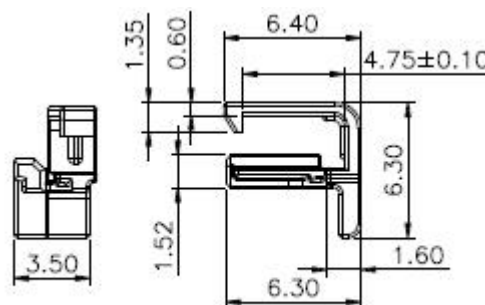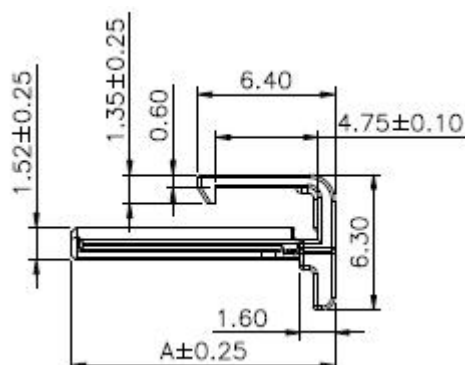

Circuits	A
2	6.30
3	8.30
4	10.30
5	12.30
6	14.30
7	16.30
8	18.30
9	20.30
10	22.30
11	24.30
12	26.30
13	28.30
14	30.30

东莞市华晶电子有限公司
<http://www.hjbright.com>

.079" (2.00mm) Pitch Terminal

Material:
Terminal: Phosphor Bronze

Rating:
Current Rating: 3.0 (22AWG, 0.35mm²) Amp
Voltage Rating: 125V AC/DC
Temperature Range: -40°C ~ +105°C

Electrical:
Contact resistance: 10m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 500V AC/Minute

Wire Range: AWG#22 (0.35mm²)
Insulation O.D.: 1.40mm/Max

HJBRIGHT®

Ordering Information
H2019T-PQ
1 2 3

1: — Series No.
2: — T: Terminal
3: — Q: Tin Plated

