

.079" (2.00mm) Pitch/Disconnectable Insulation Displacement Connectors

.079" (2.00mm) Connectors



.079" (2.00mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0

Rating:

Current Rating: 2.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute




HJBRIGHT®

Ordering Information

H2017-XXP-01-XA

1 2 34

- 1:—Series No.
2:—No. of Positions
3:—W:White
B:Black
Y:Yellow
4:—A:In Bag

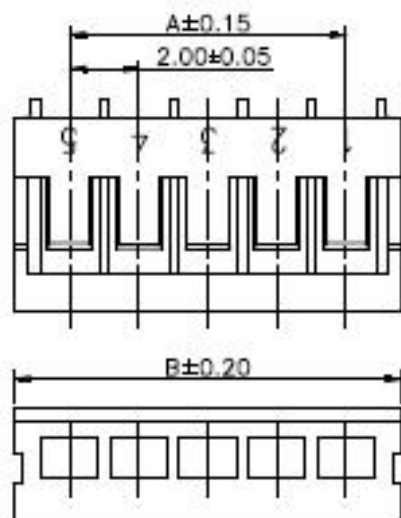

Circuits No.	Dimensions	
	A	B
2P	2.00	5.20
3P	4.00	7.20
4P	6.00	9.20
5P	8.00	11.20
6P	10.00	13.20
7P	12.00	15.20
8P	14.00	17.20
9P	16.00	19.20
10P	18.00	21.20
11P	20.00	23.20
12P	22.00	25.20
13P	24.00	27.20
14P	26.00	29.20
15P	28.00	31.20
16P	30.00	33.20
17P	32.00	35.20
18P	34.00	37.20
19P	36.00	39.20
20P	38.00	41.20

Material:

Terminal: Brass

Wire Range: AWG#24~30

Insulation O.D.: 1.30mm/Max




Qty/Reel: 10kpcs

Ordering Information


H2017T-PX

1 2 3


- 1:—Series No.
2:—Terminal
3:—Plating
Q: Tin Plated
I: Gold 3u"

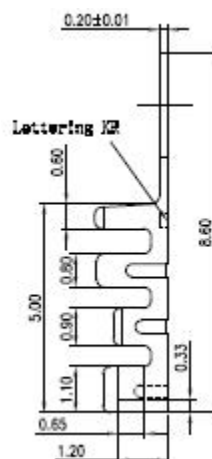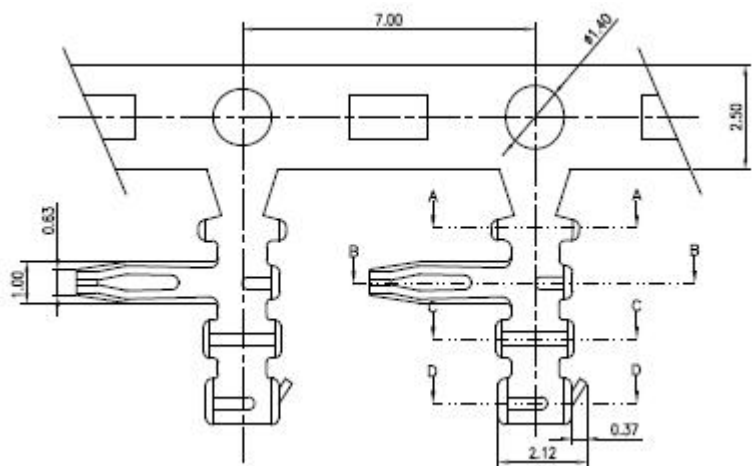


Recommended PCB Layout




SECTION A-A



SECTION B-B



SECTION C-C




SECTION D-D

.079" (2.00mm) Pitch Housing / Terminal

Specifications:
 Material And Finish:
 Insulator:Nylon 66 UL94V-0
 Color:Natural(White)
 Rating:
 Current Rating:2A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-25℃~+85℃
 Electrical:
 Contact Resistance: 20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:800V AC/minute



Ordering Information
 H2017S-XXP-01-XA
 1 2 3 4
 1: Series No.
 2: No. of Positions
 3: N:Natural(White)
 4: A:In Bag

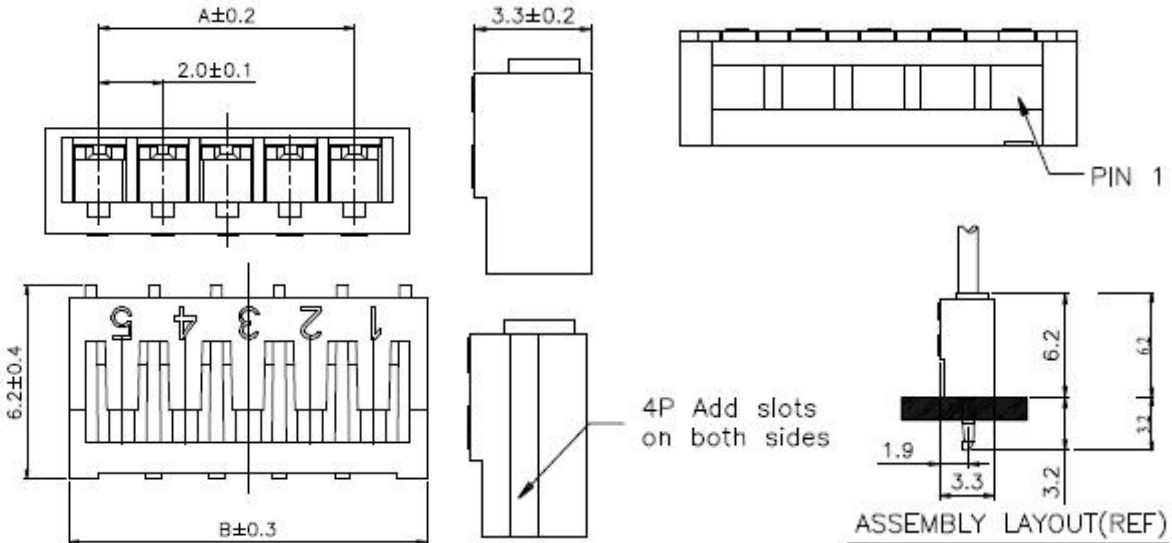


No.	Dimensions(mm)	
	A	B
02	2.00	5.40
03	4.00	7.40
04	6.00	9.40
05	8.00	11.40
06	10.00	13.40
07	12.00	15.40
08	14.00	17.40
09	16.00	19.40
10	18.00	21.40
11	20.00	23.40
12	22.00	25.40
13	24.00	27.40
14	26.00	29.40
15	28.00	31.40
16	30.00	33.40

Specifications:
 Material:Phosphor Bronze
 Range:AWG#24~30
 Current Rating:2A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-25℃~+85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:800V AC/minute



Ordering Information
 H2017ST-PQ
 1 2 3
 1: Series No.
 2: ST: Straight Terminal
 3: Q: Plated Tin

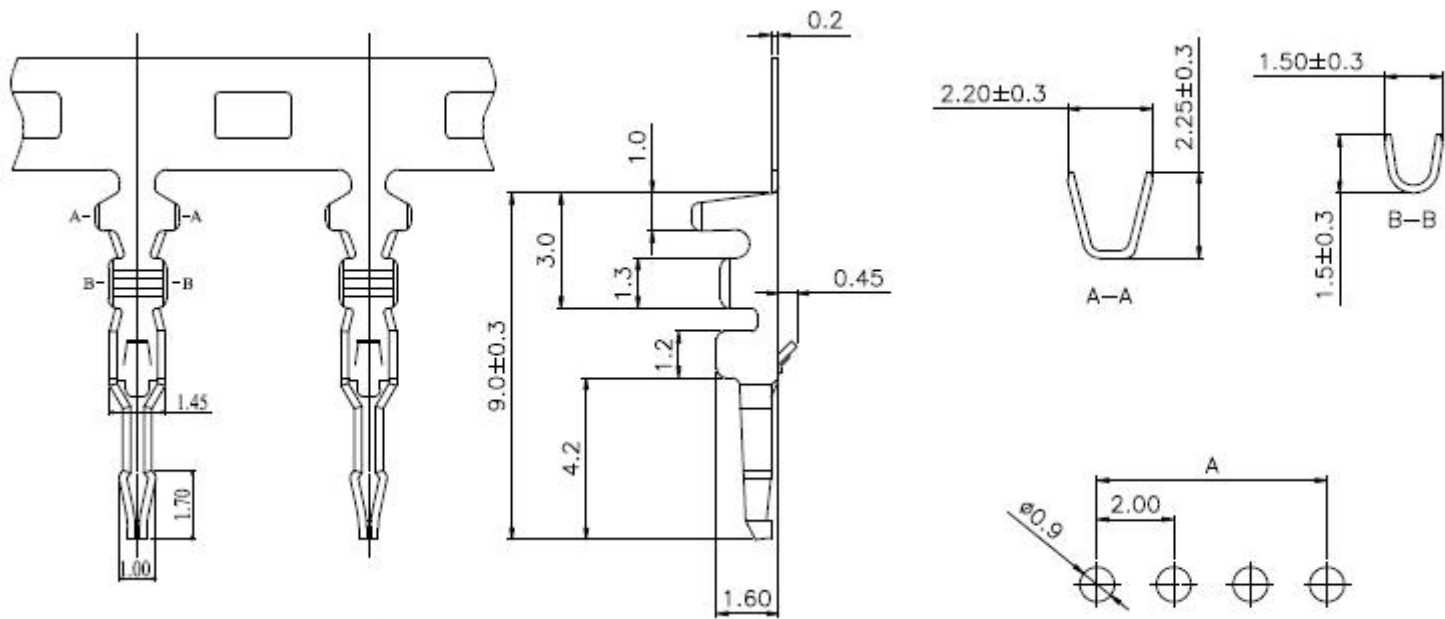

P.C.B LAYOUT