


.087"(2.20mm) Pitch/Disconnectable Insulation Displacement Connectors

.087"(2.20mm) Connectors

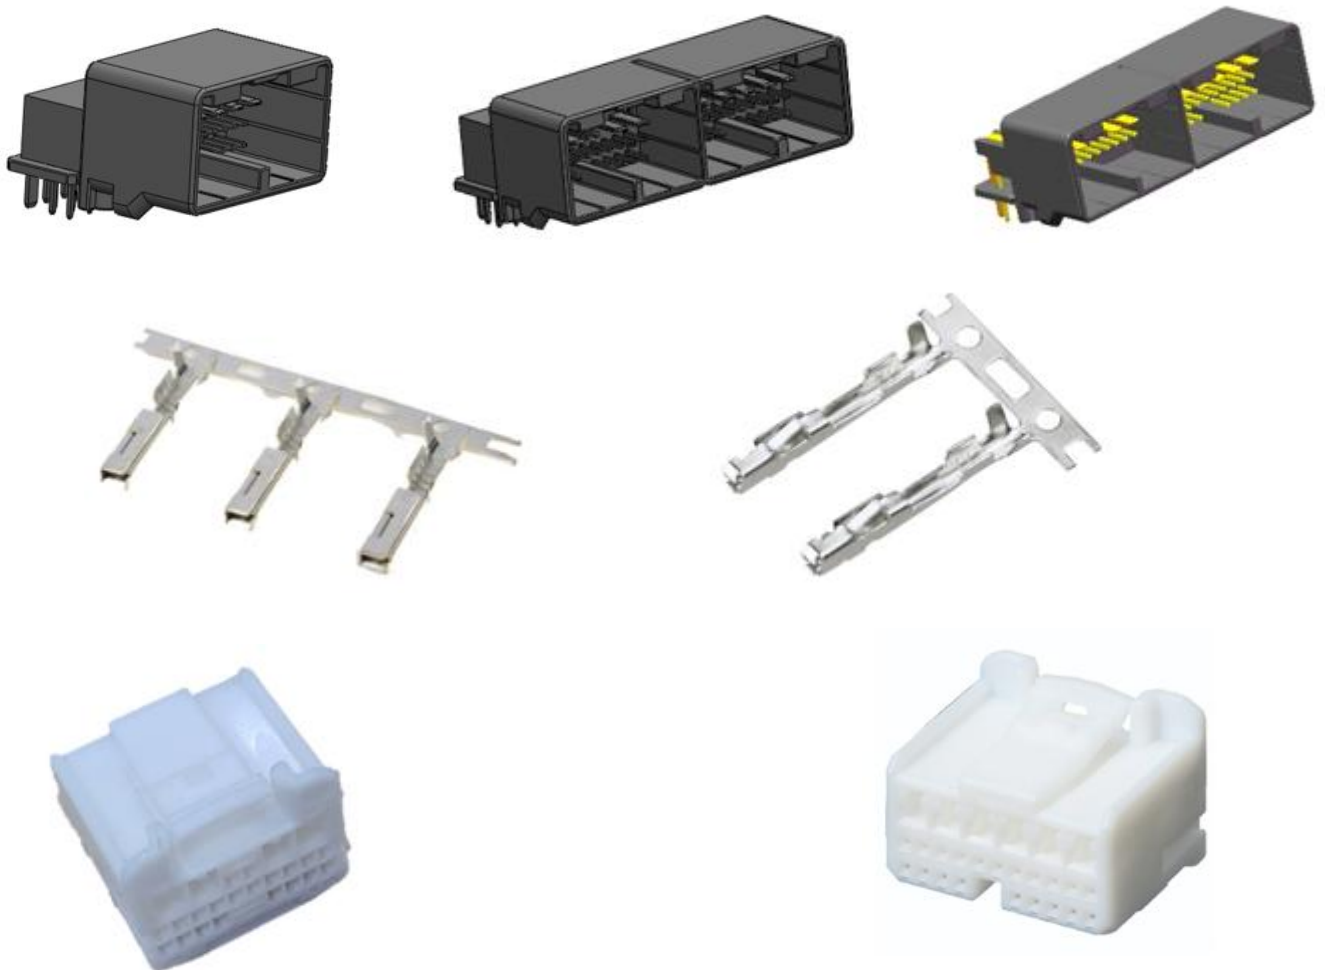

东莞市华晶电子有限公司
http://www.hjbright.com

.087" (2.20mm) Pitch Housing

Specifications:

Material :

Insulator: PBT UL94V-0

Color: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute



HJBRIGHT®

Ordering Information

H22300M-24P-01-XA

1 2 3 4 5

1: — Series No.





2: — M: Male Housing

3: — No. of Positions

4: — N: Natural

B: Black

5: — A: In Bag

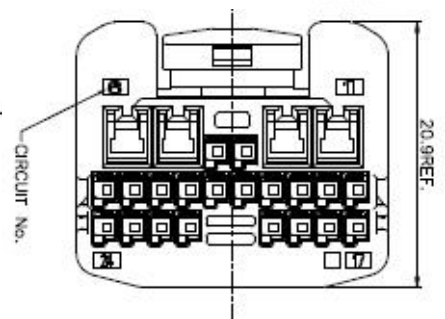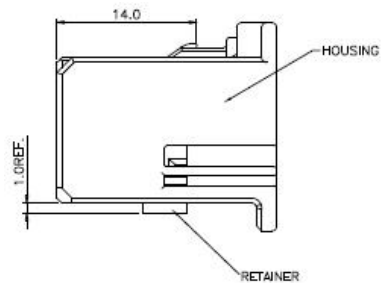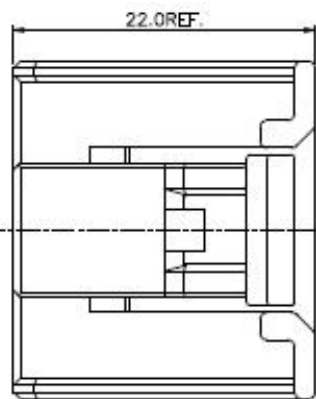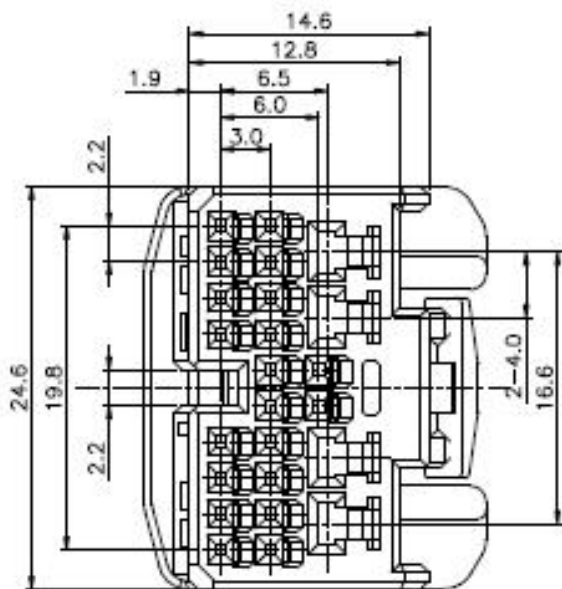

Specifications:

Material :

Insulator: PBT UL94V-0

Color: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute



Ordering Information

H22300M-26P-01-XA

1 2 3 4 5

1: — Series No.





2: — M: Male Housing

3: — No. of Positions

4: — N: Natural

B: Black

5: — A: In Bag

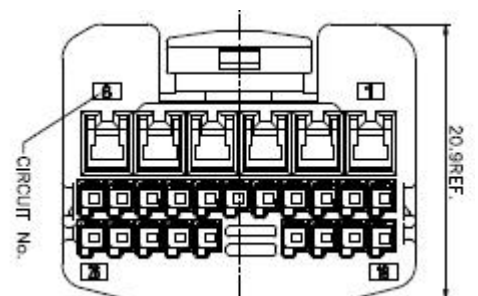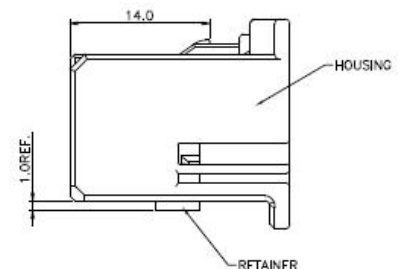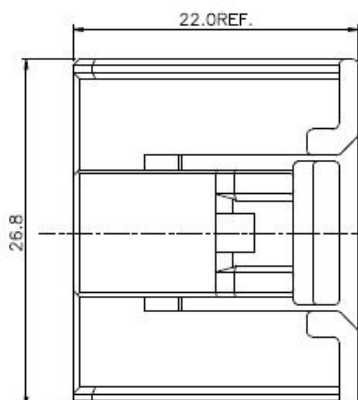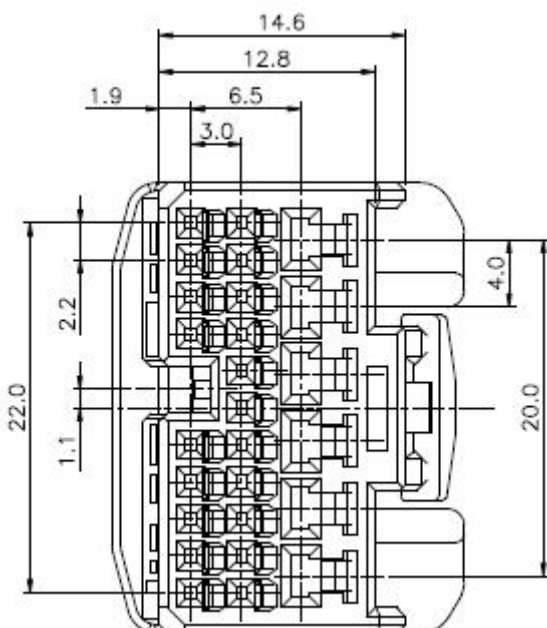

东莞市华晶电子有限公司
<http://www.hjbright.com>

.087" (2.20mm) Pitch Terminal

Specifications:

Material: Copper alloy

Wire Range: 0.75~2.0mm²

Operating Temperature Range: -40°~+105°C

HJBRIGHT®

Ordering Information

H22300TFP-PX-0X

1 2 3 4 5

1: Series No.

2: TF: Female Terminal






3: P: Power supply Pin

4: Q: Tin Plated

M: 15u" Gold on contact

5: 1: Wire Range 0.75~1.25mm²

2: Wire Range 1.25~2.0mm²

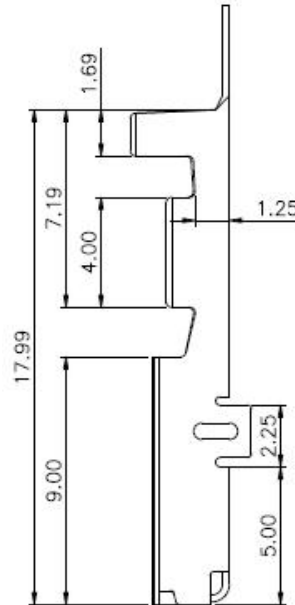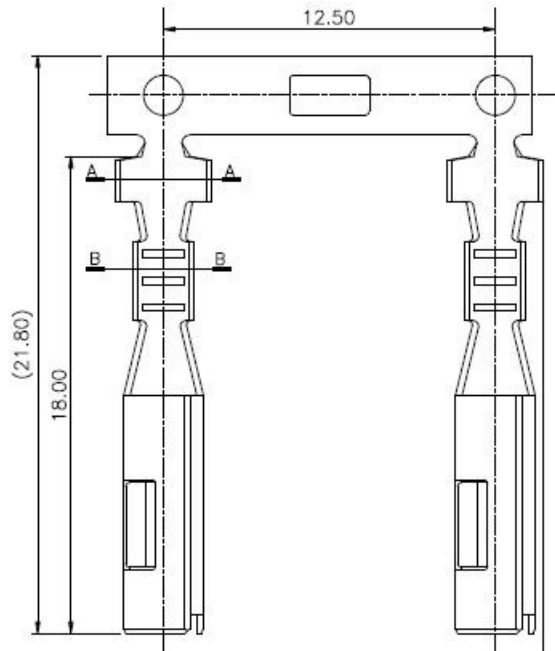

Specifications:

Material: Copper alloy

Wire Range: 0.35~0.50mm²

Operating Temperature Range: -40°~+105°C

Ordering Information

H22300TFS-PX-01

1 2 3 4






1: Series No.

2: TF: Female Terminal

3: S: Signal Pin

4: Q: Tin Plated

M: 15u" Gold on contact

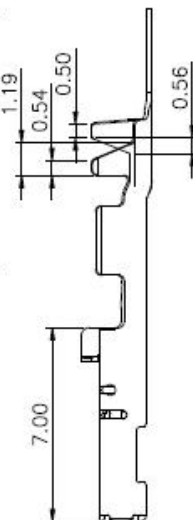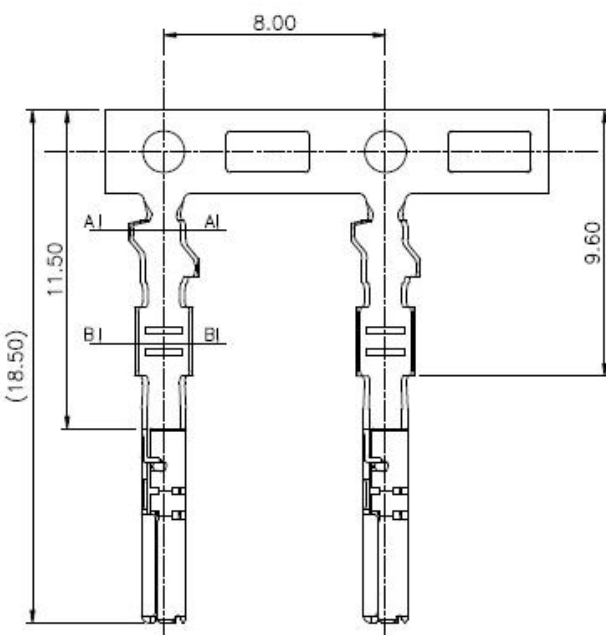

东莞市华晶电子有限公司
<http://www.hjbright.com>