
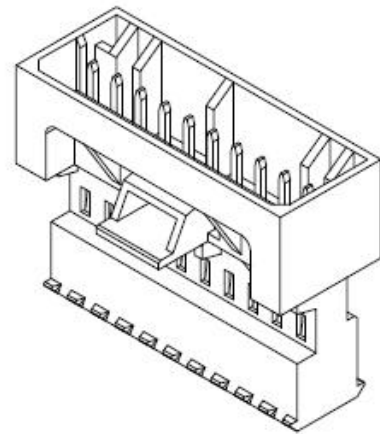


.100"(2.54mm) Pitch Male IDC/DIP Type Insulation Displacement Connectors

.100"(2.54mm) Connectors

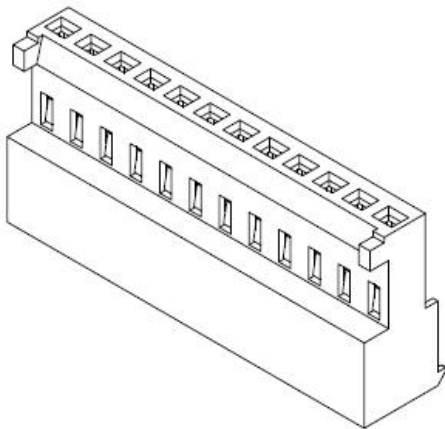

.100" (2.54mm) Pitch IDC/DIP Type

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-2

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC





Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

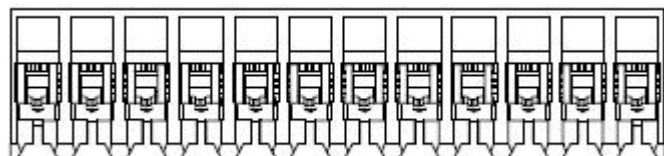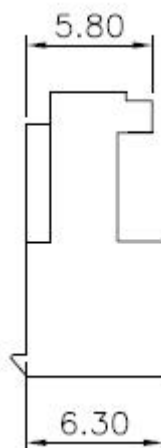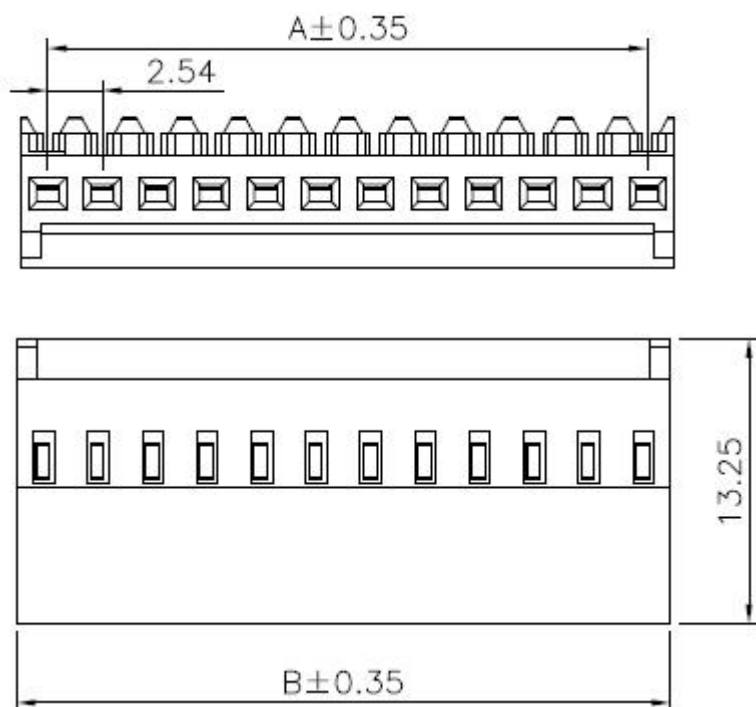


HJBRIGHT®

Ordering Information

A2551H-XXX-XX-XX

1 2 3 4 5 6 7

- 1: — Series No.
- 2: — H:Housing
- 3: — No. of Positions
- 4: — T:Tin Plated
S:Matte Tin 100u
- 5: — 22:FOR 22AWG
24:FOR 24AWG
26:FOR 26AWG
- 6: — R:Red
W:White
N:Natural
B:Black
U:Blue
G:Green
- 7: — A:A Type
B:B Type

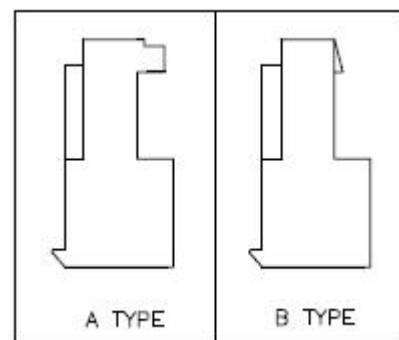

No.	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18

东莞市华晶电子有限公司
<http://www.hjbright.com>

.100" (2.54mm) Pitch IDC/DIP Type

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-2

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:4.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute








HJBRIGHT®

Ordering Information

A2551W-XXX-XX-XA

1 2 3 4 5 6

- 1:— Series No.
- 2:— H:Housing
- 3:— No. of Positions
- 4:— Q:Tin Plated
S:Matte Tin 100u
- 5:— 22:FOR 22AWG
24:FOR 24AWG
26:FOR 26AWG
- 6:— R:Red
N:Natural
B:Black

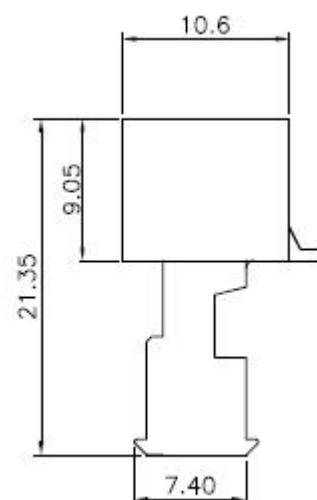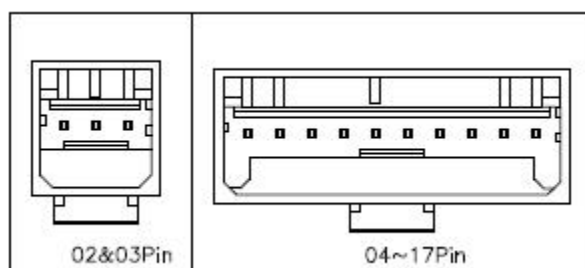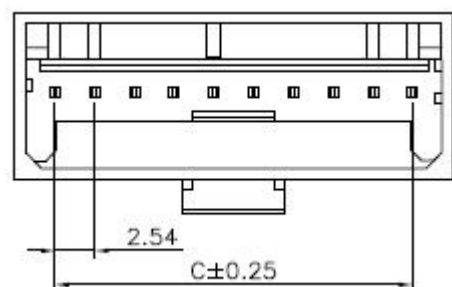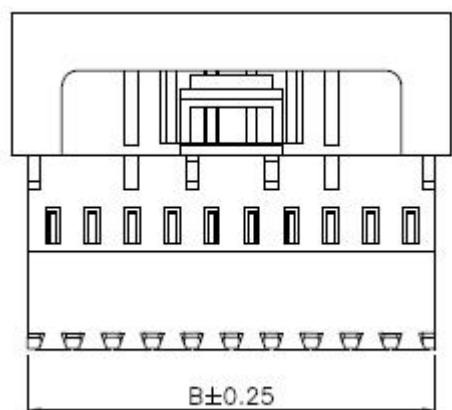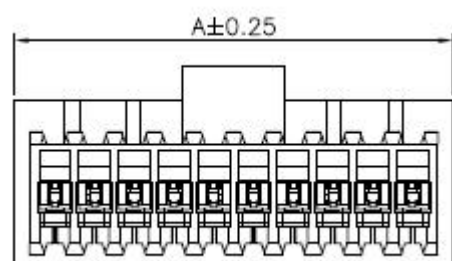

No.	A	B	C
02	7.62	5.77	2.54
03	10.16	8.31	5.08
04	12.70	10.85	7.62
05	15.24	13.39	10.16
06	17.78	15.93	12.70
07	20.32	18.47	15.24
08	22.86	21.01	17.78
09	25.40	23.55	20.32
10	27.94	26.09	22.86
11	30.48	28.63	25.40
12	33.02	31.17	27.94
13	35.56	33.71	30.48
14	38.10	36.25	33.02
15	40.64	38.79	35.56
16	43.18	41.33	38.10
17	45.72	43.87	40.64

东莞市华晶电子有限公司
<http://www.hjbright.com>