

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:600V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

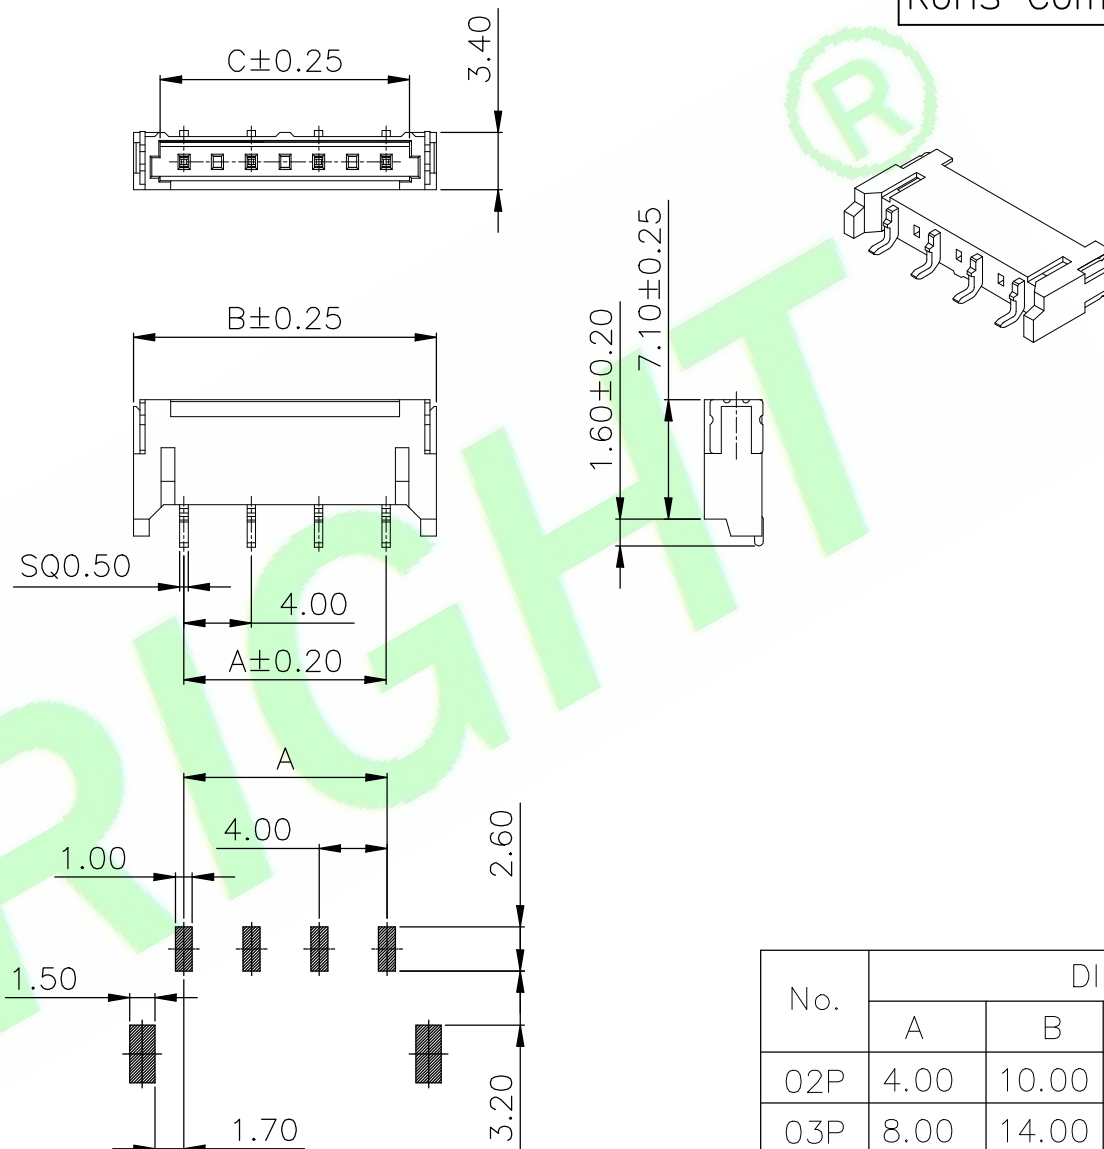

Recommend PCB LAYOUT

No.	DIM		
	A	B	C
02P	4.00	10.00	6.50
03P	8.00	14.00	10.50
04P	12.00	18.00	14.50
05P	16.00	22.00	18.50

				DR.BY.: Samson		GENERAL TOLERANCE:		PART NO : A4002H-XXX-01-G		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
				CHKD.: Tony		LINEAR	ANGLES	DWG. NO.:			
						APPD.: Billy		x.: ±0.30	x': REF±6°	TITLE : Pitch 4.0mm Wafer Horizontal SMT Type	
								x.x: ±0.25	x.x': ±3.0°		
								x.xx: ±0.20	x.xx': ±2.0°		
						x.xxx: ±0.15		x.xxx':		DATE: 27-Aug-2023	
1X	ORIGINAL	Judyyan									
REV.	DESCRIPTION	DR.BY	ECN. NO.								

SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		