







Specifications:
Material And Finish:
Insulator:PBT UL94V-0

Rating:
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°~+125°C

Electrical:
Insulator resistance:100M ohm min.
Withstanding Voltage:500V DC/Minute

Ordering Information
H20250-XXP-XX-A
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — 01:A Type Black
02:B Type Natural
03:C Type Grey
04:D Type Blue
4: — A:In Bag

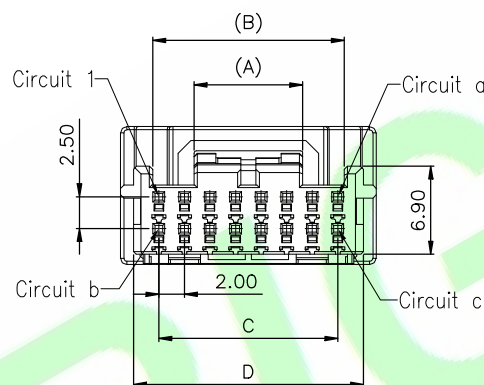

Poles	Dimensions/mm				
	A	B	C	D	E
2*04	5.00	7.40	6.00	10.00	12.00
2*05	6.50	9.40	8.00	12.00	14.00
2*06	8.50	11.40	10.00	14.00	16.00
2*07	8.50	13.00	12.00	16.00	18.00
2*08	8.50	15.00	14.00	18.00	20.00
2*09	8.50	17.00	16.00	20.00	22.00
2*10	8.50	19.00	18.00	22.00	24.00
2*11	8.50	21.00	20.00	24.00	26.00
2*12	8.50	23.00	22.00	26.00	28.00
2*13	8.50	25.00	24.00	28.00	30.00
2*14	8.50	27.00	26.00	30.00	32.00
2*15	8.50	29.00	28.00	32.00	34.00
2*16	8.50	31.00	30.00	34.00	36.00
2*17	8.50	33.00	32.00	36.00	38.00
2*18	8.50	35.00	34.00	38.00	40.00
2*19	8.50	37.00	36.00	40.00	42.00
2*20	8.50	39.00	38.00	42.00	44.00

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H20250-XXP-XX-A
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.40	X': REF±6°	DWG. NO.:
	X.X: ±0.35	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0°	TITLE : Pitch 2.0mm Double Row Connector Housing
	X.XXX: ±0.15	X.XXX':	
			DATE: 27-Aug-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm




THIRD ANGLE PROJECTION


A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


2*04P~2*07 Pin





2*08 Pin




2*09 Pin




2*10P~2*20 Pin




2*04~2*07 Pin




2*08~2*20 Pin




A Type Black



B Type Natural



C Type Grey



D Type Blue


Reserved Coding type

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H20250-XXP-XX-A
	LINEAR	ANGLES	
CHKD.: Tony	X.: ± 0.40	X': REF $\pm 6^\circ$	DWG. NO.:
	X.X: ± 0.35	X.X': $\pm 3.0^\circ$	
APPD.: Billy	X.XX: ± 0.25	X.XX': $\pm 2.0^\circ$	TITLE : Pitch 2.0mm Double Row Connector Housing
	X.XXX: ± 0.15	X.XXX':	
			DATE: 27-Aug-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4