
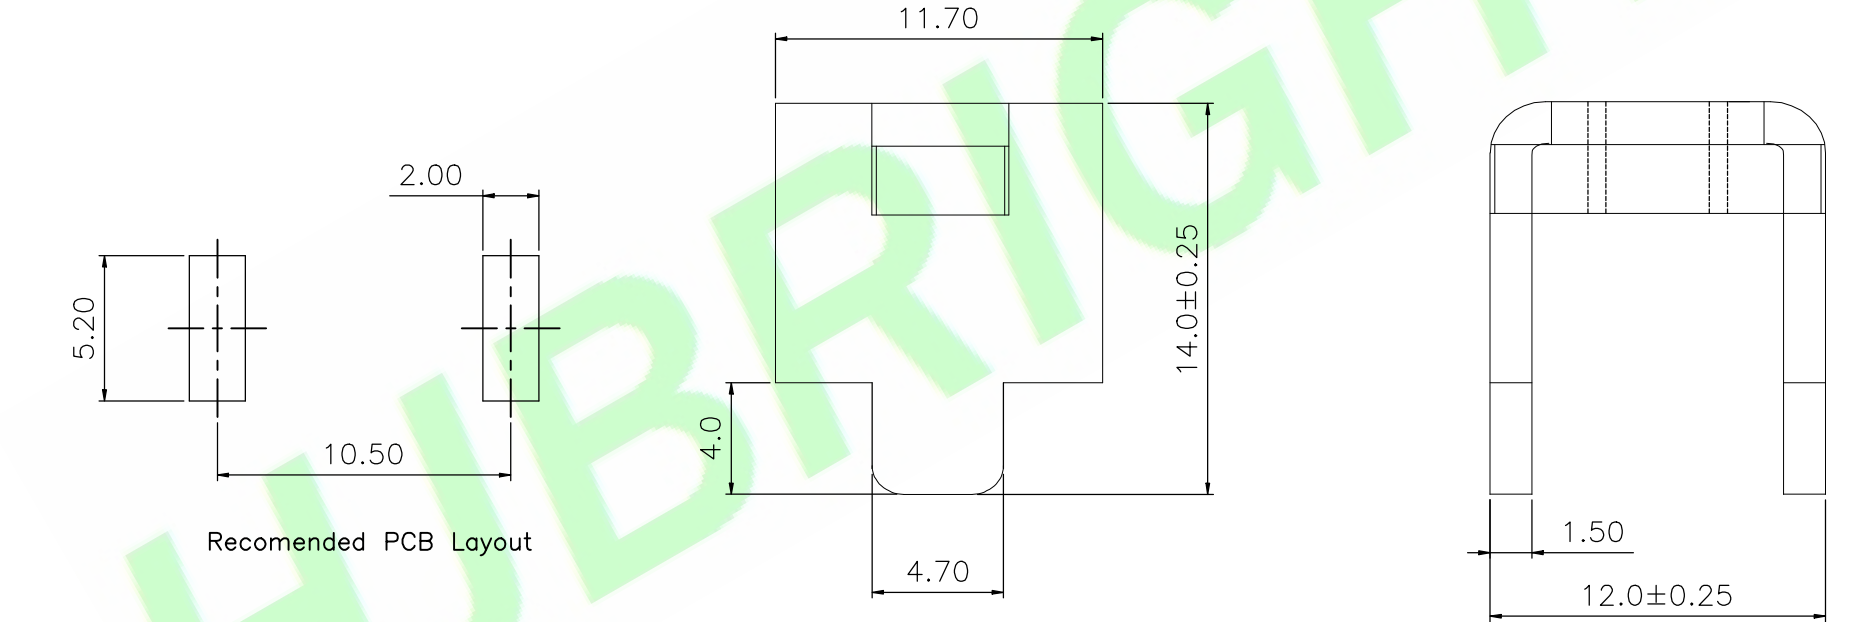


技术要求:

Technical requirements:

1. 材质: 黄铜
1. Material: brass
2. 打铜底 $0.5\mu\text{m}$, 镍 $2\mu\text{m}$, 雾锡 $3\sim5\mu\text{m}$
2. Copper base $0.5\mu\text{m}$, nickel $2\mu\text{m}$, Matte tin $3\sim5\mu\text{m}$
3. 不得有变形, 毛刺等缺陷
3. No deformation, burr and other defects
4. 插脚尖部符合可焊性要求
4. The tip of the insert foot meets the solderability requirements
5. 螺纹需符合通止规要求
5. The thread shall meet the requirements of the stop rule
6. 螺纹扭矩: 251bft
6. Thread torque: 251bft



DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : KM1200S—M5—A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT—E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES	DWG. NO.:				
CHKD.: Hu.Hu	X.: ±0.35	X': ±5.0°	TITLE : M5—6H Connecting Terminal		SHEET: 1/1		A4
	X.X: ±0.25	X.X': ±3.0°			SCALE: 1:1		
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 15—Jul—2023		UNIT: mm		
	X.XXX: ±0.10	X.XXX': ±1.0°					

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY	